
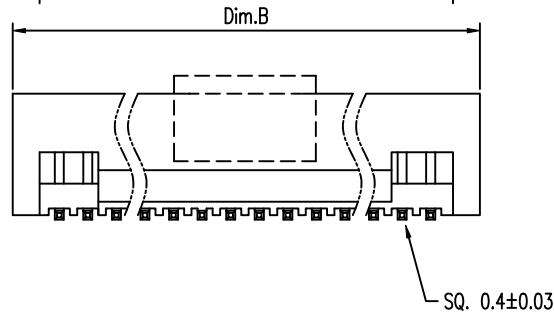
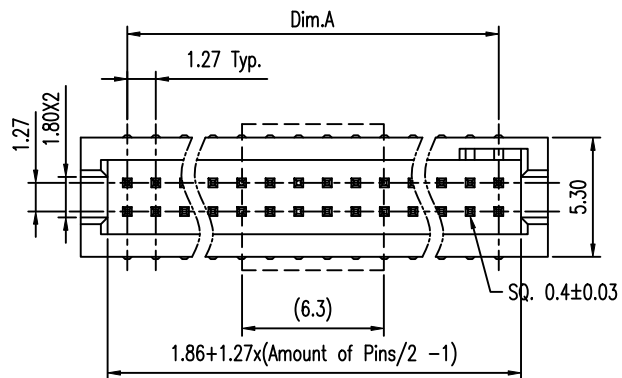




Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

TABLE 1

DASH No.	DIM	Amount of Pins	Dim.A	Dim.B
-000 06 XX LF	6	2.54	6.80	
-000 08 XX LF	8	3.81	8.07	
-000 10 XX LF	10	5.08	9.34	
-000 12 XX LF	12	6.35	10.16	
-000 14 XX LF	14	7.62	11.88	
-000 16 XX LF	16	8.89	13.15	
-000 20 XX LF	20	11.43	15.69	
-000 26 XX LF	26	15.24	19.50	
-000 30 XX LF	30	17.78	22.04	
-000 34 XX LF	34	20.32	24.58	

DASH No.	DIM	Amount of Pins	Dim.A	Dim.B
-000 40 XX LF	40	24.13	28.39	
-000 44 XX LF	44	26.67	29.66	
-000 50 XX LF	50	30.48	34.74	
-000 60 XX LF	60	36.83	41.09	
-000 64 XX LF	64	39.37	43.63	
-000 66 XX LF	66	40.64	44.90	
-000 68 XX LF	68	41.91	46.17	
-000 80 XX LF	80	49.53	53.79	
-000 A0 XX LF	100	62.23	66.49	

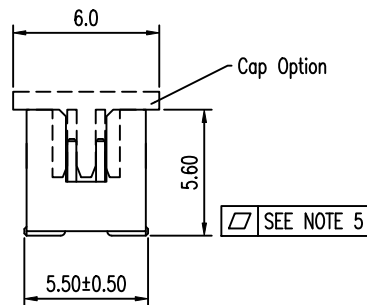

APPEARANCE OF 6,8 POS.

NOTE:

- MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, SQ=0.40±0.03MM
- FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1um(40u")MIN Ni OVER ALL
- SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN.
- CO-PLANARITY OF SOLDER TAIL 0.10MM MAX. FOR 4 TO 40 POS.
CO-PLANARITY OF SOLDER TAIL 0.12MM MAX. FOR 42 TO 100 POS.

6. PRODUCT NUMBERING:

20021221 - 0 0 0 XX X X LF

LEAD FREE

PLATING:

1: GOLD FLASH ALL OVER

4: 0.25um(10U")GOLD AT CONTACT

8: 0.76um(30U")GOLD AT CONTACT

PACKING

D: TUBE+ CAP

T: TUBE

C: REEL+CAP(6,8,10,12,16,20P)

PIN COUNT

SEE TABLE 1

SELECTED LOADED OPTION

0: FULL LOADED

OTHERS: SEE TABLE 2

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection		www.fciconnect.com	
A	T09-1117	S.LIN	09/15/09	linear	.XX ± 0.25			title	
B	T10-0017	S.LIN	01/21/10		.XXX ± 0.10			1.27X1.27MM BTB HEADER	
C	T10-0061	S.LIN	10'-5-07	angles	0° ±2°			SHROUDED, SMT	
D	T10-0173	S.LIN	10'-10-22	dr	STERLING LIN 09/15/09	MM		product family 585	
		engr	STERLING LIN 09/15/09					code	
		chr	GARY HSIEH 09/15/09					size dwg no	
		appd	JOSEPH HSIA 09/15/09					A4	
sheet index	revision sheet	D	D			scale	NA	20021221	
		1	2					sheet 1 of 2	
								cage code	

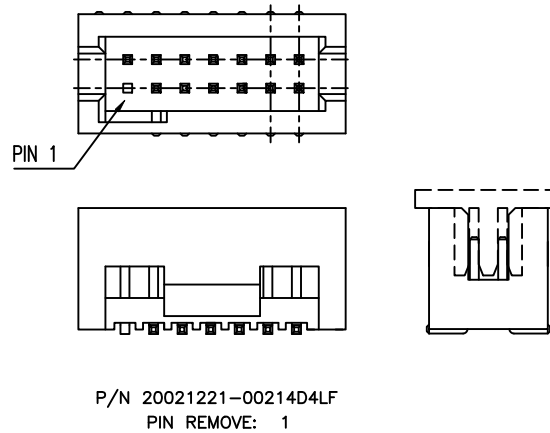
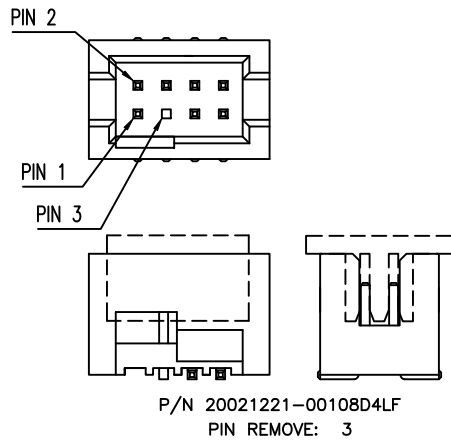


TABLE 2

DASH No.	DIM	Amount of Pins	PIN REMOVED	Dim.A	Dim.B
-001 08 D4 LF		7	3	3.81	8.07
-002 14 D4 LF		13	1	7.62	11.88

mat'l. code				tolerances unless otherwise specified			INSPECTION COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X ± 0.35			projection 	title 1.27X1.27MM BTB HEADER SHROUDED, SMT			
A	T09-1117	S.LIN	09/15/09		.XX ± 0.20							
B	T10-0017	S.LIN	01/21/10	angles	.XXX ± 0.10							
C	T10-0061	S.LIN	10'-5-07		0° ±2°							
D	T10-0173	S.LIN	10'-10-22	dr	STERLING LIN	09/15/09	MM 	product family 585			code	
				engr	STERLING LIN	09/15/09		size dwg no			TWN	
				chr	GARY HSIEH	09/15/09	scale NA	A4	20021221			sheet 2 of 2
				appd	JOSEPH HSIA	09/15/09						
sheet index	revision sheet	D 1	D 2									