


# 2mm Density Pin Header Connectors CPM-A13 Series

## FEATURES

CPM-A13 series connectors are combined with A04 series short connectors and used for switching PCB wiring.

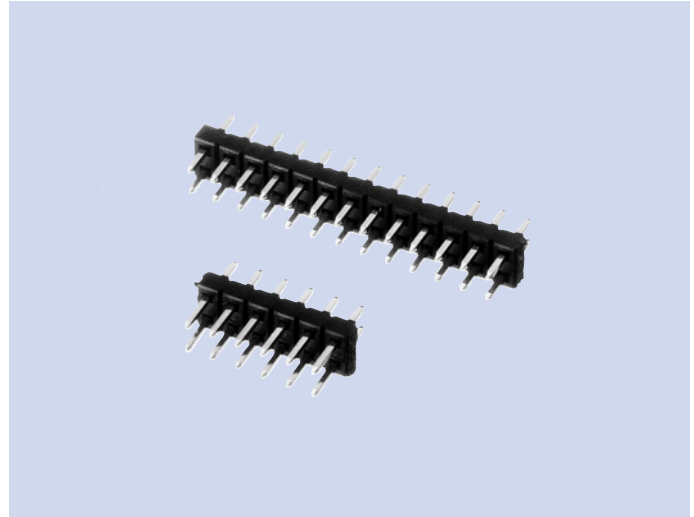

## HOW TO ORDER

**A13-026-0015B**

- 1 Series No.
- 2 No. of contacts
- 3 Running No. assigned by us.

## SPECIFICATIONS




### ELECTRICAL CHARACTERISTICS

Rated Voltage	500V AC (rms)
Rated Current	3A
Withstanding Voltage	1,000V AC (rms) 1minute
Insulation Resistance	500MΩ min. (at 500V DC)

## MATERIAL & FINISH

Component parts	Material	Finish
Housing	Glass filled PBT resin	(Black)
Contact	Copper Alloy	Solder plating

**DIMENSIONS**

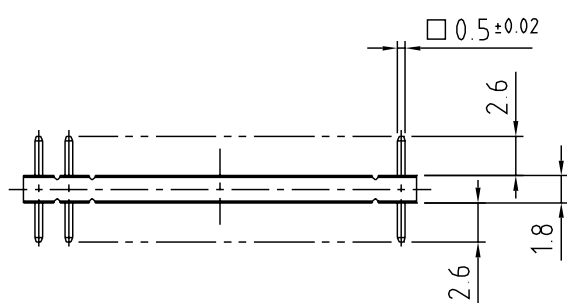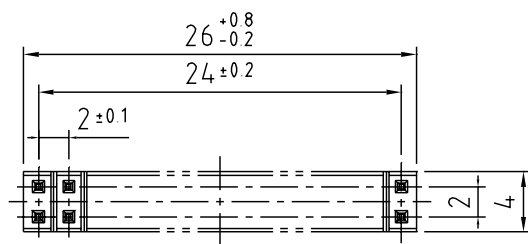

Unit : mm