


- Series 170, 173 DIL Headers are equipped with turret heads for wiring applications.
- Terminations are pluggable .020" diameter solder tails (M-M# 0700) see page 174 for details; or 3-level wraposts (M-M# 0730) see page 185 for details.

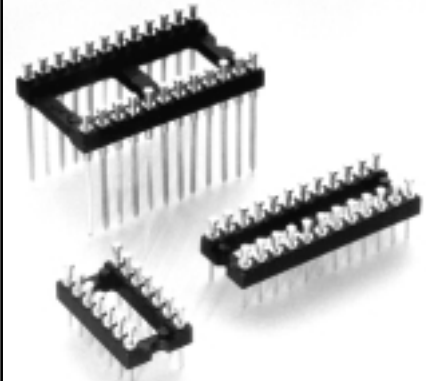

| Total number of pins | | | | Quantity per tube | Ordering Information | | | |
|--------------------------|-----|-----|-----|-------------------|----------------------|-------------------|--|-------------------|
| | A | B | C | | Solder Tail | 3 Level Wrapost | | |
| | 10 | 0.5 | 0.2 | | 0.3 | 41 | | 170-XX-210-00-001 |
| 4 | 0.2 | 0.3 | 0.4 | 102 | 170-XX-304-00-001 | 173-XX-304-00-001 | | |
| 6 | 0.3 | 0.3 | 0.4 | 67 | 170-XX-306-00-001 | 173-XX-306-00-001 | | |
| 8 | 0.4 | 0.3 | 0.4 | 50 | 170-XX-308-00-001 | 173-XX-308-00-001 | | |
| 10 | 0.5 | 0.3 | 0.4 | 40 | 170-XX-310-00-001 | 173-XX-310-00-001 | | |
| 14 | 0.7 | 0.3 | 0.4 | 28 | 170-XX-314-00-001 | 173-XX-314-00-001 | | |
| 16 | 0.8 | 0.3 | 0.4 | 25 | 170-XX-316-00-001 | 173-XX-316-00-001 | | |
| 18 | 0.9 | 0.3 | 0.4 | 22 | 170-XX-318-00-001 | 173-XX-318-00-001 | | |
| 20 | 1.0 | 0.3 | 0.4 | 20 | 170-XX-320-00-001 | 173-XX-320-00-001 | | |
| 22 | 1.1 | 0.3 | 0.4 | 18 | 170-XX-322-00-001 | 173-XX-322-00-001 | | |
| 24 | 1.2 | 0.3 | 0.4 | 16 | 170-XX-324-00-001 | 173-XX-324-00-001 | | |
| 28 | 1.4 | 0.3 | 0.4 | 14 | 170-XX-328-00-001 | 173-XX-328-00-001 | | |
| 20 | 1.0 | 0.4 | 0.5 | 20 | 170-XX-420-00-001 | 173-XX-420-00-001 | | |
| 22 | 1.1 | 0.4 | 0.5 | 18 | 170-XX-422-00-001 | 173-XX-422-00-001 | | |
| 24 | 1.2 | 0.4 | 0.5 | 16 | 170-XX-424-00-001 | 173-XX-424-00-001 | | |
| 28 | 1.4 | 0.4 | 0.5 | 14 | 170-XX-428-00-001 | 173-XX-428-00-001 | | |
| 32 | 1.6 | 0.4 | 0.5 | 12 | 170-XX-432-00-001 | 173-XX-432-00-001 | | |
| 24 | 1.2 | 0.6 | 0.7 | 16 | 170-XX-624-00-001 | 173-XX-624-00-001 | | |
| 28 | 1.4 | 0.6 | 0.7 | 14 | 170-XX-628-00-001 | 173-XX-628-00-001 | | |
| 32 | 1.6 | 0.6 | 0.7 | 12 | 170-XX-632-00-001 | 173-XX-632-00-001 | | |
| 36 | 1.8 | 0.6 | 0.7 | 11 | 170-XX-636-00-001 | 173-XX-636-00-001 | | |
| 40 | 2.0 | 0.6 | 0.7 | 10 | 170-XX-640-00-001 | 173-XX-640-00-001 | | |
| 42 | 2.1 | 0.6 | 0.7 | 9 | 170-XX-642-00-001 | 173-XX-642-00-001 | | |
| 48 | 2.4 | 0.6 | 0.7 | 8 | 170-XX-648-00-001 | 173-XX-648-00-001 | | |
| 50 | 2.5 | 0.6 | 0.7 | 8 | 170-XX-650-00-001 | 173-XX-650-00-001 | | |
| 52 | 2.6 | 0.6 | 0.7 | 7 | 170-XX-652-00-001 | 173-XX-652-00-001 | | |
| 50 | 2.5 | 0.9 | 1.0 | 8 | 170-XX-950-00-001 | 173-XX-950-00-001 | | |
| 52 | 2.6 | 0.9 | 1.0 | 7 | 170-XX-952-00-001 | 173-XX-952-00-001 | | |
| 64 | 3.2 | 0.9 | 1.0 | 6 | 170-XX-964-00-001 | 173-XX-964-00-001 | | |
| SPECIFY PLATING CODE XX= | | | | | 10 | 90 | | |
| Pin Plating | | | | | 10μ" Au | 200μ" Sn/Pb | | |

For High
Temperature
Insulators
Add '100'
To End Of
Part Numbers