


PCB Terminal Strips, Series 256, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in

CAGE CLAMP®



7
59

Pin spacing 5/5.08 mm / 0.2 in
0.5 – 2.5 mm² | AWG 20 – 12
175 V~, 16 A

5 – 6 mm / 0.22 in

* 1 KEC
* 2 VDE KEC CCA BV NV

Pin spacing 7.5/7.62 mm / 0.3 in
0.5 – 2.5 mm² | AWG 20 – 12
275 V~, 16 A




5 – 6 mm / 0.22 in

* 1 KEC
* 2 VDE KEC CCA BV NV

Pin spacing 10/10.16 mm / 0.4 in
0.5 – 2.5 mm² | AWG 20 – 12
275 V~, 16 A


5 – 6 mm / 0.22 in

* 1 KEC
* 2 VDE KEC CCA BV NV

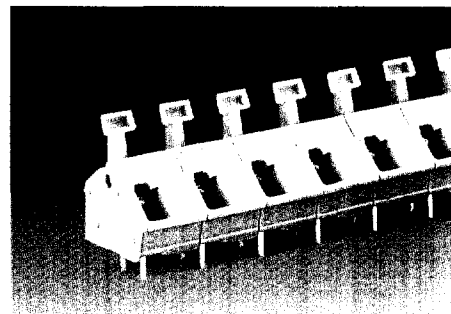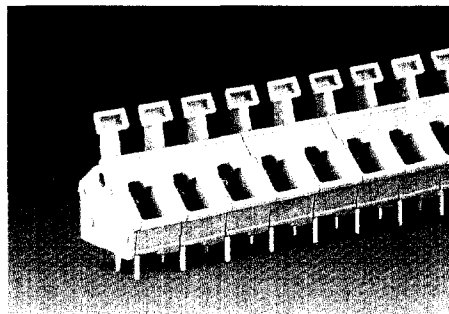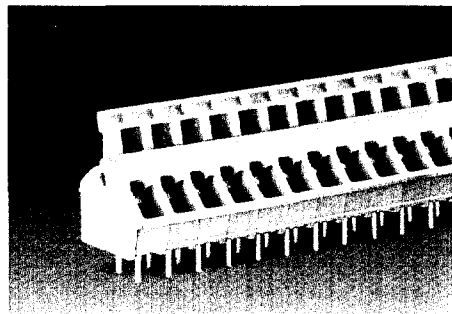


No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Terminal strips, light grey, standard lengths, 2 solder pins / pole			Terminal strips, light grey, standard lengths, 2 solder pins / pole			Terminal strips, light grey, standard lengths, 2 solder pins / pole		
2	256-402/000-009/999-950	400	2	256-502/000-009/999-950	280	2	256-602/000-009/999-950	200
3	256-403/000-009/999-950	280	3	256-503/000-009/999-950	180	3	256-603/000-009/999-950	140
4	256-404/000-009/999-950	200	4	256-504/000-009/999-950	140	4	256-604/000-009/999-950	100
5	256-405/000-009/999-950	160	5	256-505/000-009/999-950	120	5	256-605/000-009/999-950	80
6	256-406/000-009/999-950	140	6	256-506/000-009/999-950	100	6	256-606/000-009/999-950	60
7	256-407/000-009/999-950	120	7	256-507/000-009/999-950	80	7	256-607/000-009/999-950	60
8	256-408/000-009/999-950	100	8	256-508/000-009/999-950	60	8	256-608/000-009/999-950	60
9	256-409/000-009/999-950	100	9	256-509/000-009/999-950	60	9	256-609/000-009/999-950	40
10	256-410/000-009/999-950	80	10	256-510/000-009/999-950	60	10	256-610/000-009/999-950	40
12	256-412/000-009/999-950	60	12	256-512/000-009/999-950	40	12	256-612/000-009/999-950	40
16	256-416/000-009/999-950	60	16	256-516/000-009/999-950	40	16	256-616/000-009/999-950	20
24	256-424/000-009/999-950	40	24	256-524/000-009/999-950	20	24	256-624/000-009/999-950	20
36	256-436/000-009/999-950	20						
48	256-448/000-009/999-950	20						
Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins ... /332-009/999-950			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins ... /332-009/999-950			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins ... /332-009/999-950		
Other lengths – contact factory.			Other lengths – contact factory.			Other lengths – contact factory.		
Terminal strips for EEx i applications see volume 2, page 2.13			Terminal strips for EEx i applications see volume 2, page 2.13			Terminal strips for EEx i applications see volume 2, page 2.13		
						Ordering examples Terminal strip, pin spacing 5/5.08 mm / 0.2 in, 8-pole, light grey: 256-408/000-009/999-950 Terminal strip, pin spacing 7.5/7.62 mm / 0.3 in 12-pole with solder pins 5.5 mm / 0.217 in, light grey: 256-512/332-009/999-950		


Dimensions (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

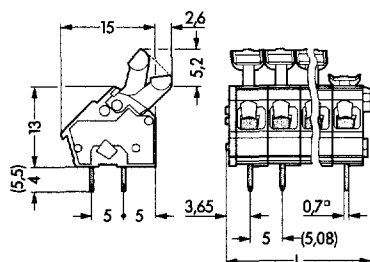

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

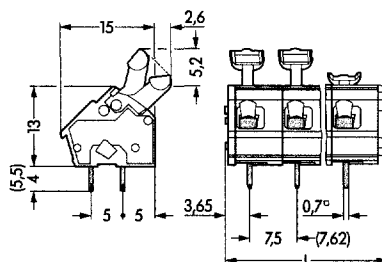

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

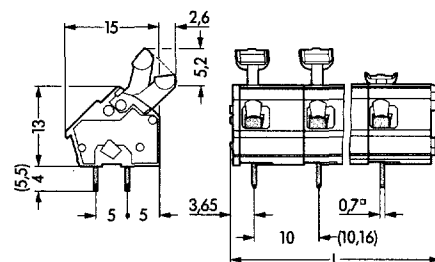

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm