

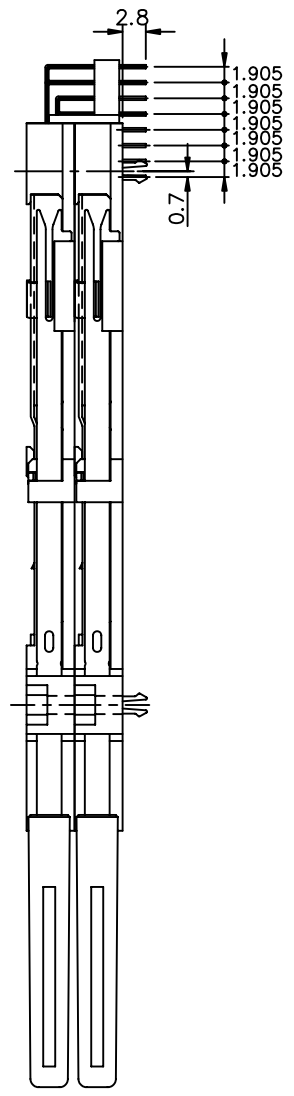


Tous droits strictement réservés. Reproduction ou communication à des tiers int
propre de c BERG ELECTRONICS
Droits de reproduction BERG ELECTRONICS by


All rights strictly reserved. Reproduction or issue to third parties in any for
without written authority from the proprietor.
Copyright BERG ELECTRONICS by

PRODUCT NO.
57410-200HAH/200HAHLF


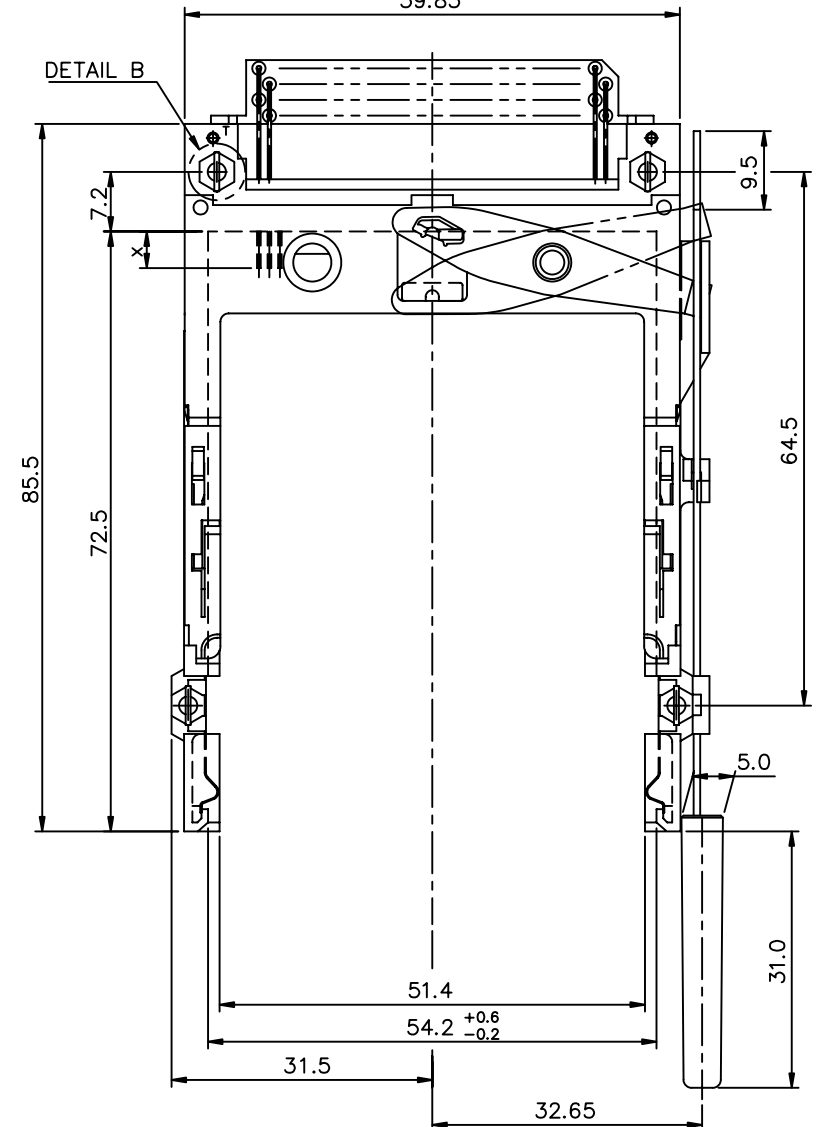


- NOTES:
1. EJECT FORCE : 3.5 Kg MAX.
 2. EJECT TRAVEL: 8.0mm
 3. MATERIAL
 - 3.1 HEADER ASS'Y :
PLASTIC : HOUSING ...LCP UL94V-O NATURAL
LOCATOR ...G.F. 6/6 NYLON UL94-VO BLACK
 - PIN : COPPER ALLOY
 - 3.2 EJECT MECHANISM ASS'Y :
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-O BLACK
PUSH BUTTON: POLYPHTHARAMID UL94V-O BLACK
 - PLATE : STAINLESS
 - EMI CONTACT: PHOSPHOR BRONZE
 4. FINISH (PIN)
UNDER PLATING : 0.5µm MIN. Ni
CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd-Ni
SOLDER TAIL : 2.5µm MIN. Sn-Pb
: 2.5µm MIN. PURE Sn (FOR -*****LF)
 5. DIM "X"
 6. IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
 7. LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008
 8. IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

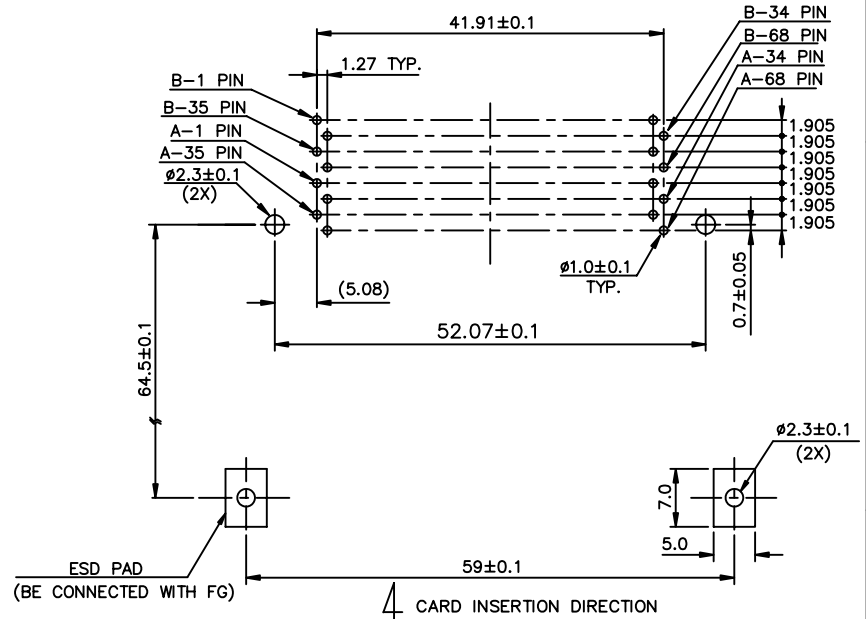

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		A FCI www.fciconnect.com	
rev.	ecn no.	dr	date	linear	±0.30	projection	title	DOUBLE DECK R/A EJECTOR TYPE 1/2/3	
A	T10082	WL	03/18/01						
B	T10348	WL	12/05/01						
C	T20166	WL	05/30/02	angles	± 2°				
D	N05-0204	WB	07/12/05	dr	WENDY CHEN 03/14/01	unit	product family	PCMCA	code
				enr	MINERVA WANG 03/14/01	mm/inch	size	dwg no.	sheet
				chr	JOSEPH HSIA 03/14/01	scale	A3	57410	1 OF 2
				appd	JOSEPH HSIA 03/14/01	1.5:1			
sheet	revision	D	D						
index	sheet	1	2						

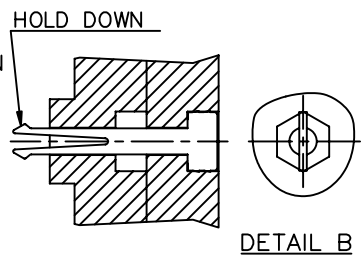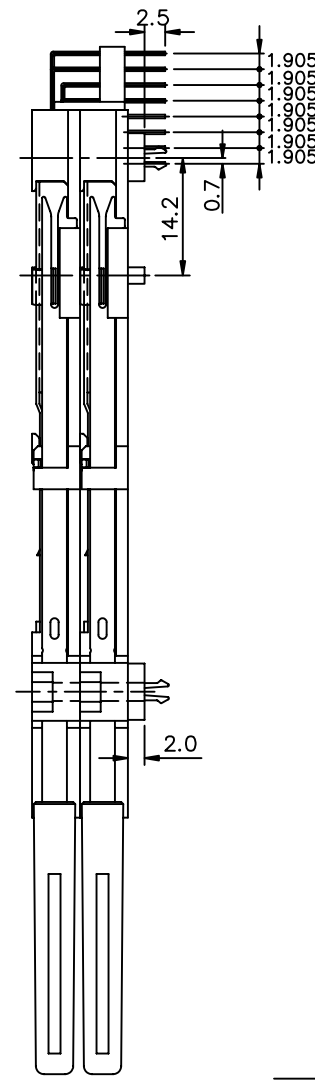

-
- B-1 PIN
 B-35 PIN
 A-1 PIN
 A-35 PIN
 $\phi 2.3 \pm 0.1$ (2X)
 64.5 ± 0.1
 14.2 ± 0.1
 1.27 TYP.
 41.91 ± 0.1
 52.07 ± 0.1
 59 ± 0.1
 4
 CARD INSERTION DIRECTION
 AD
 TED WITH FG)
 B-34 PIN
 B-68 PIN
 A-34 PIN
 A-68 PIN
 1.905
 1.905
 1.905
 1.905
 1.905
 1.905
 0.7 ± 0.05
 $\phi 1.0 \pm 0.1$ TYP.
 $\phi 2.5$ (2X)
 $\phi 2.3 \pm 0.1$ (2X)
 7.0
 5.0

PDM: Rev:D STATUS:Released Printed: Sep 06, 2005