


Baureihe SDR 170.260...170.272
(Funkentstördrossel)

Series SDR 170.260...170.272
(RFI suppression choke)

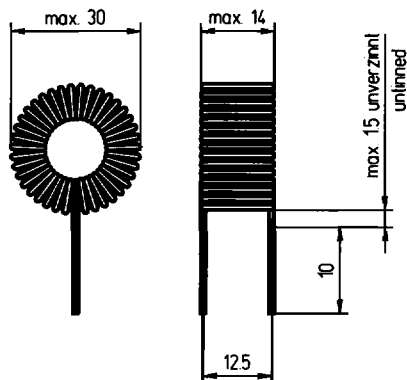

524

Technische Daten / Technical data

- Typischer Kern / *Typical toroid*: R 27/14,5/11
- Leerlaufinduktivität / *No-load inductance*: 22 μH – 4700 μH
- Induktivitätstoleranz / *Inductance tolerance*: $\pm 15\%$
- Strom / *Current*: 0.9 A - 7.7 A
- Betriebstemperatur / *Operating temperature*: -30°C bis/up to +125°C
- Umgebungstemperatur / *Ambient temperature*: $\leq 60^\circ C$
- Isolierstoffklasse / *Insulation class*: B

Bezeichnung <i>Designation</i>	I _N A	L ₀ μH	R m Ω	Bestellnummer <i>Order no.</i>
SDR 0,9-3,1	0.90	4700	1880	170.260
SDR 1,15-2,1	1.15	3300	1510	170.261
SDR 1,0-1,7	1.00	2200	1230	170.262
SDR 1,3-0,8	1.30	1000	670	170.263
SDR 1,6-0,56	1.60	680	435	170.264
SDR 3,0-0,3	3.00	470	190	170.265
SDR 3,2-0,23	3.20	330	140	170.266
SDR 4,1-0,15	4.10	220	80	170.267
SDR 5,6-0,072	5.60	100	55	170.268
SDR 6,0-0,051	6.00	68	45	170.269
SDR 6,6-0,039	6.60	47	39	170.270
SDR 7,0-0,028	7.00	33	33	170.271
SDR 7,7-0,020	7.70	22	27	170.272