

**SPECIFICATIONS**

**Mechanical**

**Contact Retention Force:** 0.50Kg(1.1Lb)min.  
**Durability:** 250 Cycles

**Electrical**


**Voltage Rating:** 750V  
**Current Rating:** 1A  
**Contact Resistance:** 50mW max.  
**Dielectrical Withstanding Voltage:** 1000V  
**Insulation Resistance:** 1000MW min.

**Physical**


**Housing:** LCP, UL 94-0, Ivory White  
**Contact:** Phosphor Bronze  
**Plating:** See "ORDERING INFORMATION"

**FUTURE BUS CONNECTOR**

**1F Series,**  
**Rec. Solder Fit Type**  
**2.0mm [.078"] Pitch**  
**4Rows**

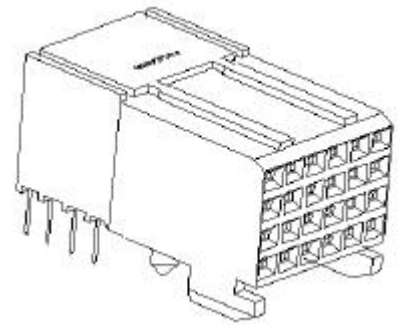

**DRAWING**

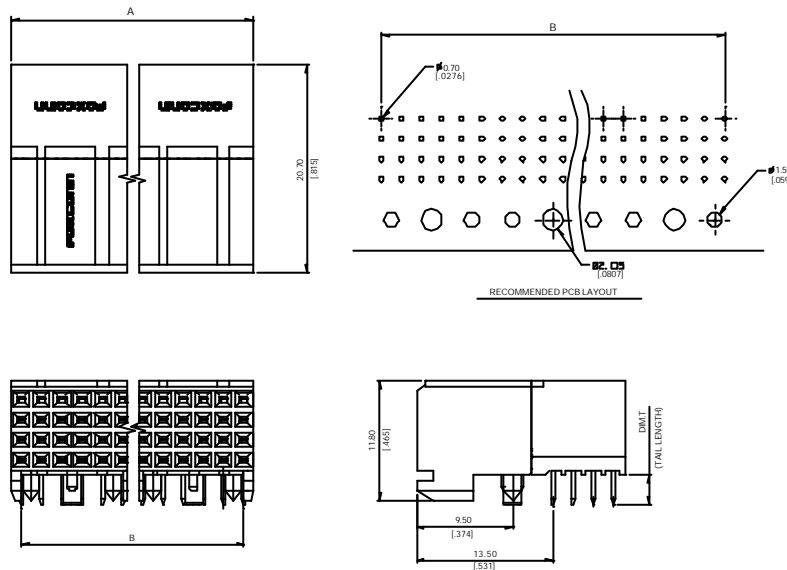

**ORDERING INFORMATION**

PRODUCT NO.: 1 F 1 2 \* \* \* 5 - S \* 0 1



POS.	DIM.A	DIM.B
24	11.90	10.00
48	23.90	22.00
96	47.90	46.00
192	95.90	94.00