

Model 41 Medium Power Fixed Coaxial Attenuator

dc to 18.0 GHz
10 Watts

Bi-directional Design



Features

- /// **Compact Construction** - Lowest size/power ratio.
- /// **Quality Connectors** with special high temperature support beads.
- /// **Designed to meet environmental requirements of MIL-DTL-3933.**


Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 18.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:


Nominal ATTN (dB)	Deviation (dB)
1, 2	± 0.50
3, 6	± 0.30
10	± 0.50
20	± 0.70
30	± 1.00

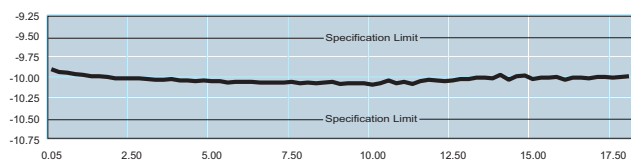

Typical Attenuation Accuracy

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 8	1.20
8 - 12.4	1.30
12.4 - 18	1.35

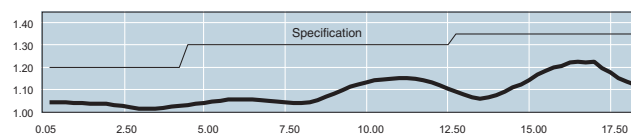

Typical SWR of a 41-10

POWER RATING (mounted horizontally): 10 watts average (bi-directional) to 25°C ambient temperature, derated linearly to 1 Watt @ 125°C. 1 kilowatt **peak** (5 μ sec pulse width; 0.5% duty cycle).

POWER COEFFICIENT: <0.0015 dB/dB/watt

TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C

TEMPERATURE RANGE: -55 °C to 125 °C

TEST DATA: Insertion loss test data supplied at 0.05, 4.0, 8.0, 12.0, and 18.0 GHz. Other test data can be provided at additional cost.


CONNECTORS: SMA (Male/Female) connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

Connector Options	Type/Description
1	SMA, Female
2	SMA, Male

CONSTRUCTION: Black, finned aluminum body, gold plated beryllium copper contacts.

WEIGHT: 28 g (1 oz.) maximum

PHYSICAL DIMENSIONS:

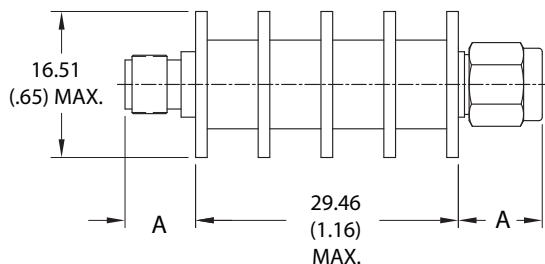


Connector	DIM A
SMA Male	11.18 (0.44)
SMA Female	9.4 (0.37)

NOTE:

1. All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
2. Unit available with RoHS compliant materials, specify when ordering.

MODEL NUMBER DESCRIPTION:

Example:

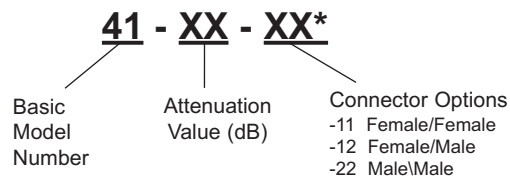

* Unit is bi-directional and full power may be applied to either connector.