

Fig. 1

- Series (800 & 802) single & double row interconnects feature sturdy .040" diameter leads and low profile (.071" thick) insulator.
- Sockets (801 & 803) use (MM # 1313) receptacles that accept pin diameters from .037"-.043", (See page 149 for details).

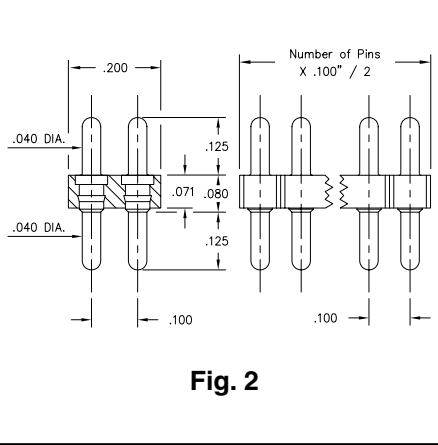
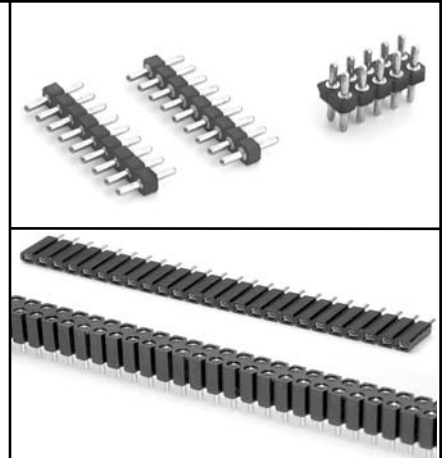


Fig. 2

Ordering Information

Fig. 1

Series 800...10-004	Single Row Pin Header
800-XX-0__-10-004000	
Specify # of pins	└───> 01-50

Fig. 2

Series 802...10-004	Double Row Pin Header
802-XX-0__-10-004000	
Specify # of pins	└───> 04-72

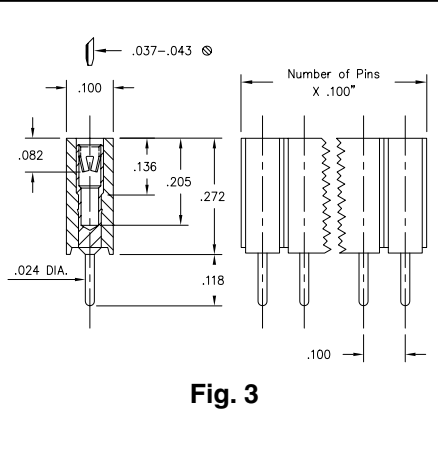


Fig. 3

XX= Plating Code
See Below

For RoHS compliance, select ◇ plating code.
For the gold option (XX=10) also change part number from 80X-XX-0XX-X0-001000 to 80X-10-0XX-X0-001100

SPECIFY PLATING CODE XX=	10 ◇	90	40 ◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

Fig. 3

Series 801...10-004	Single Row Socket
801-XX-0__-10-004000	
Specify # of pins	└───> 01-50

Fig. 4

Series 803...10-004	Double Row Socket
803-XX-__-10-004000	
Specify # of pins	└───> 004-100

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=	13 ◇	93	99	43 ◇	44 ◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn