




1.27mm (.050") Pitch Picoflex™ PF-50 Custom Cable Harness

92316

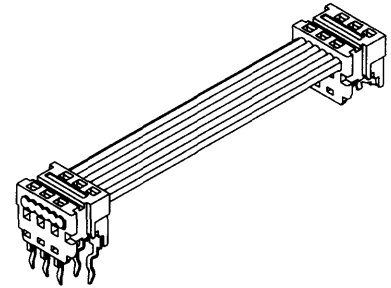

FEATURES AND SPECIFICATIONS

Features and Benefits

- Cable assembly with 90327 and 90584 connectors
- Sizes 4 to 20 and 26 (see 90327 and 90584)
- UL 2651, 28 AWG (7 strand) ribbon cable
- Lengths from 7 to 120cm

Reference Information

Packaging: Bag
Mates With: 90325, 90800, 90814, 90715 and 90779
Designed In: Millimeters

Electrical

Voltage: 250V
Current: 1.2A

Mechanical

Mating Force: 1.7N
Unmating Force: 0.25N
Durability: 30 cycles max.

Physical


Housing: 6/6 nylon, UL 94V-0
Contact: Phosphor Bronze Alloy
Plating: 3-6µ" Tin/Lead
Operating Temperature: -20 to +105°C
Insulation: Cable—Gray PVC
Wire Range: 28 AWG

See 90327, 90584 and 6800 cable pages for more specifications

Ribbon Cable Systems



CATALOG DRAWING (FOR REFERENCE ONLY)

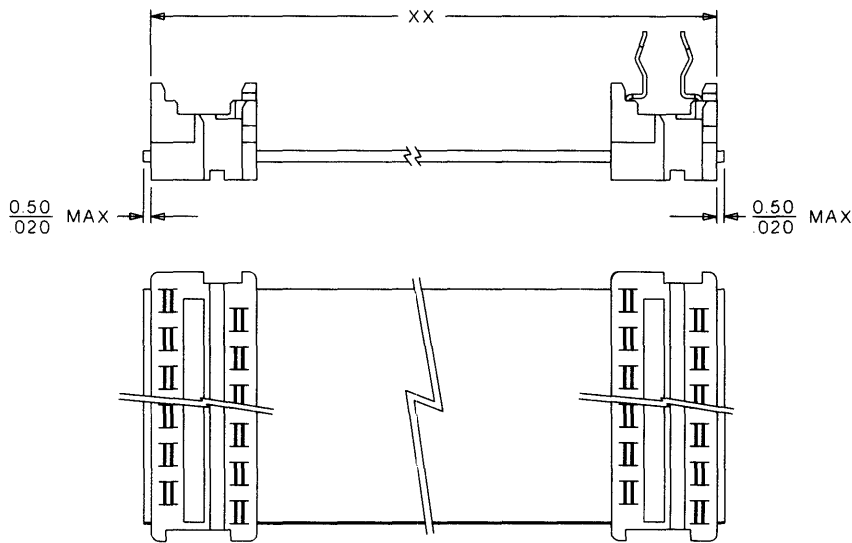

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.
4	92316-04XX
6	92316-06XX
8	92316-08XX
10	92316-10XX
12	92316-12XX
14	92316-14XX
16	92316-16XX
18	92316-18XX
20	92316-20XX
26	92316-26XX

Length	XX
7-99cm	07-99
100cm	01
105cm	02
110cm	03
115cm	04
120cm	05

Replace XX with length in cm (min. 7cm, max. 120cm), see table
Example: 92316-0832 is a cable with 90327-0308 and 90584-2308, 32cm long