


TYPE N CABLE CONNECTORS

LARGE CABLE GN-AHS TYPE

Part Number	Cable	Impedance	Crimp Tool	Cable Trim Figure
GN-214-AHS/480	RG-214/U	50Ω	G-CRT-480	17
GN-8-213-AHS/460	RG-8/U RG-213/U	50Ω	G-CRT-480	16 for RG-8/U 17 for RG-213/U
GN-8-AHS/480-LD	RG-8/U Foam	50Ω	G-CRT-480	16
GN-216-AHS/480	RG-216/U	75Ω	G-CRT-211	17
GN-11-AHS/460	RG-11/U Up to 60% braid	75Ω	G-CRT-211	14
GN-11-AHS/480	RG-11/U Over 60% braid	75Ω	G-CRT-211	14
GN-375-CX	.375 Cable Flex	75Ω	G-CRT-211	21
NS-3008-9	RG-11/U	*	G-CRT-480	14
NS-3008-23	Belden 8214	50Ω	G-CRT-480	16
NS-3008-29	Belden 9913	50Ω	G-CRT-480	16

*50Ω interface and 75Ω cable

- Attached 5/8 inch crimp ring provides:
 - Ease of installation
 - Superior cable retention
 - Improved strain relief
 - Improved shielding

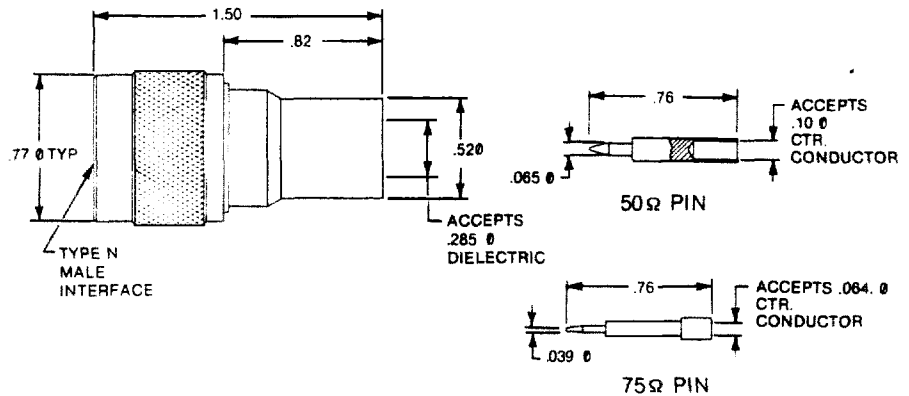


SMALL CABLE GN-AHS TYPE

Part Number	Cable	Impedance	Crimp Tool	Cable Trim Figure
GN-58-AHS/250	RG-58/U	50Ω	G-CRT-775	10A
GN-223-AHS/290	RG-223/U	50Ω	G-CRT-775	10A
GN-59-AHS/290-†	RG-59/U	75Ω	G-CRT-775	10A
GN-59-AHS/312-†	RG-59/U	75Ω	G-CRT-775	10A
GN-6-AHS/312-†	RG-6/U	75Ω	G-CRT-775	10A
GN-6-AHS/342-†	RG-6/U	75Ω	G-CRT-775	10A
GN-6-AHS/357-†	RG-6/U	75Ω	G-CRT-775	10A
GN-59-AHP/284-L	Plenum RG-59/U	75Ω	G-CRT-775	10A
GN-6-AHP/312-L	Plenum RG-6/U	75Ω	G-CRT-775	10A

†Add suffix L or H to part number for low or high density dielectric

- Attached 1/2 inch crimp ring provides:
 - Ease of installation
 - Superior cable retention
 - Improved strain relief
 - Improved shielding

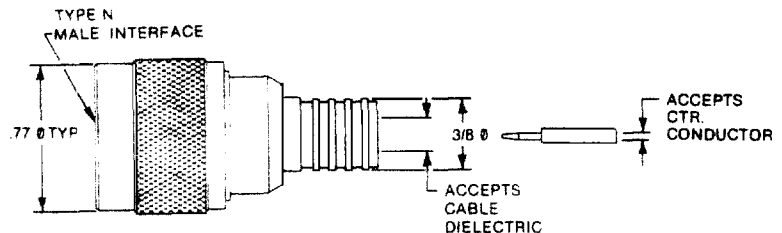

- All brass construction assures superior electrical performance
- Bright acid tin plating provides improved corrosion resistance
- Crimp installation for both center contact and crimp ring assures fast, reliable termination—NO SOLDERING REQUIRED
- Silicone rubber gasket provides interface seal
- Slim design allows easy application to shrink tubing
- Pre-assembled and tested cable assemblies are also available



GILBERT ENGINEERING CO., INC.

POST OFFICE BOX 23189
PHOENIX, AZ 85063-3189 USA

5310 W. CAMELBACK ROAD
GLENDALE, AZ 85301-7597 USA

TEL: 602-245-1050
TEL: 800-528-5567

FAX: 602-931-0684
FAX: 800-344-6358