

Connectors for 5-conductor shielded cable

F Connectors

Housing




GT18HW-5S-R20HU
768-0005-6

Item	Material	Finish
Housing	PBT	Black
Terminal	Beryllium copper	Tin plating (selective gold)

Note: Applicable cable is conductor cutout
0.5 mm² cable.
Contact our sales department for
unspecified wires.

*Recommended cable: CAVUS-0.5

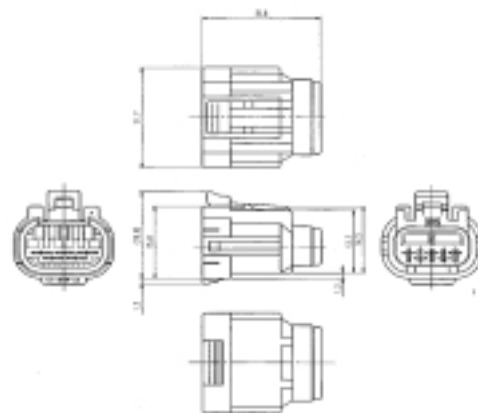

Retainer for GT18HW-5S-R20HU




GT18HW-5S-1.3R 768-0006-9

Note: Applicable cable with outer diameter of 1.3.
Contact our sales department for unspecified wires.

*Recommended cable: CAVUS-0.5

Item	Material	Finish
Wiring block	PBT	Black
Wire seal	Silicon rubber	White
Retainer	PBT	Black

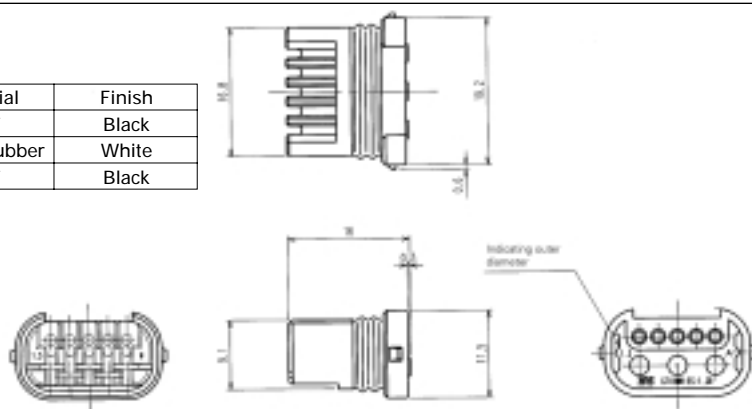

Board type for GT18HW-5S-R20HU


Item	Material	Finish
Housing	PBT	Black
Terminal	Copper alloy	Tin plating (selective gold)



GT18HW-5S-2.5DS 768-0007-1

Note 1: Use JIS B 1115, 1112 screw.

Note 2: Thickness of panel = 1.6 mm.

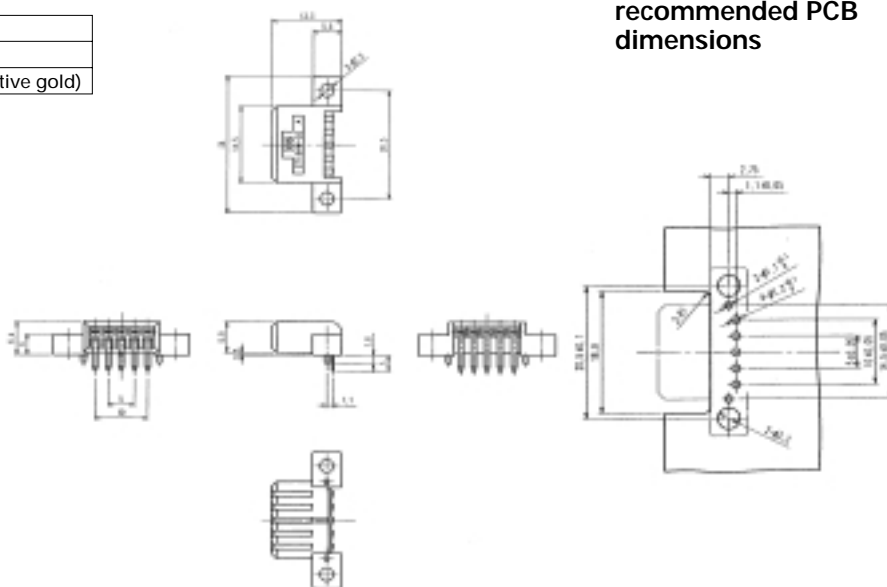

◆ **Diagram of
recommended PCB
dimensions**