

# Product Specifications



## L2A-PDMDM

LDF2-50 SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Male, variable length




## CHARACTERISTICS

### General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF2-50
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Male
Variable Length	For custom lengths contact 1-800-255-1479 (North America), 1-779-435-6500 (International), or an Andrew representative

### Jumper Assembly Sample Label

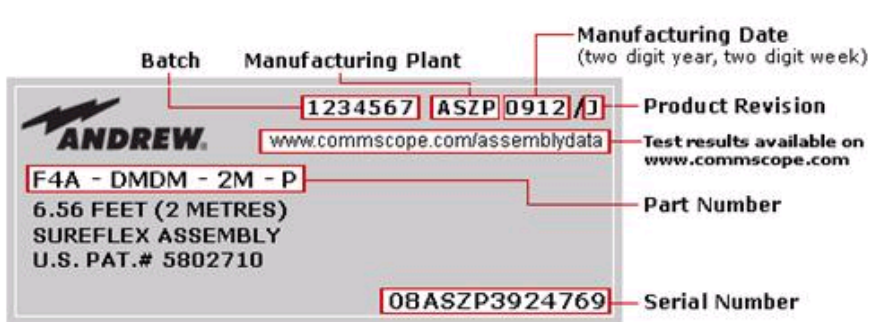

### Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
700–3000 MHz	1.43	15.00

### Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

[www.commscope.com/andrew](http://www.commscope.com/andrew)

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See [www.commscope.com/andrew](http://www.commscope.com/andrew) for the most current information.

page 1 of 2  
6/9/2011

# Product Specifications

L2A-PDMDM



## INCLUDED PRODUCTS

### **LDF2-50**

LDF2-50, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket

---