


## Professional High Temperature MINI-MELF Resistor

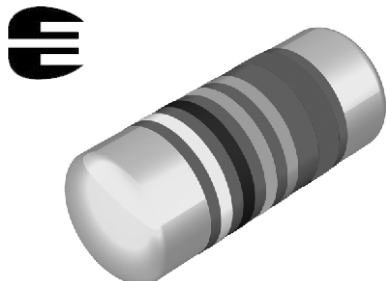

MMA 0204 professional High Temperature MELF resistors are the perfect choice for most fields of modern professional electronics where high operating temperatures, power rating, reliability and stability is of major concern. These improved properties are enabled by a modified resistive film material. The typical applications in the fields of automotive and industrial equipment reflect the outstanding level of proven reliability.

### FEATURES

- 175 °C specified operating temperature
- AEC-Q200 qualified
- Advanced thin film technology
- Excellent stability, < 0.1 %
- Matte Sn termination on Ni barrier layer
- Compliant to RoHS Directive 2011/65/EU

AUTOMOTIVE  
GRADE



RoHS  
COMPLIANT

### APPLICATIONS

- Automotive
- Industrial

### METRIC SIZE

DIN	0204
CECC	RC 3715M

### TECHNICAL SPECIFICATIONS

DESCRIPTION	MMA 0204 HT
CECC size	RC 3715M
Resistance range	47 Ω to 100 kΩ; 0 Ω
Resistance tolerance	± 1 %; ± 0.5 %
Temperature coefficient	± 50 ppm/K; ± 25 ppm/K
Rated dissipation, $P_{70}^{(1)}$	0.5 W
Operating voltage, $U_{max}$ AC/DC	200 V
Permissible film temperature, $\vartheta_F$ max. <sup>(2)</sup>	175 °C
Operating temperature range <sup>(2)</sup>	- 55 °C to 175 °C
Insulation voltage	
1 min; $U_{ins}$	300 V
Continuous	75 V
Failure rate: FIT <sub>observed</sub>	≤ 0.1 x 10 <sup>-9</sup> /h

#### Notes

<sup>(1)</sup> The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

<sup>(2)</sup> Please refer to APPLICATION INFORMATION below.

## APPLICATION INFORMATION

The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime. At the maximum permissible film temperature of 175 °C the useful lifetime is specified for 1000 h. The designer may estimate the performance of the particular resistor application or set certain load and temperature limits in order to maintain a desired stability.

MAXIMUM RESISTANCE CHANGE AT RATED POWER			
DESCRIPTION	MMA 0204 HT		
Metric size	RC 3715M		
Operation mode	Standard	Power	High Temperature
Rated power	$P_{70} = 0.25 \text{ W}$	$P_{70} = 0.4 \text{ W}$	$P_{70} = 0.5 \text{ W}$
Permissible film temperature, $\theta_F$ max.	125 °C	155 °C	175 °C
Operating temperature range	- 55 °C to 125 °C	- 55 °C to 155 °C	- 55 °C to 175 °C
Max. resistance change at $P_{70}$ for resistance range:	47 $\Omega$ to 100 k $\Omega$		
$\Delta R/R$ max., after:			
1000 h	$\leq 0.10 \%$	$\leq 0.15 \%$	$\leq 0.25 \%$
8000 h	$\leq 0.15 \%$	$\leq 0.35 \%$	-
225 000 h	$\leq 1.0 \%$	-	-



# MMA 0204 HT - Professional

Professional High Temperature  
MINI-MELF Resistor

Vishay Beyschlag

## PART NUMBER AND PRODUCT DESCRIPTION

Part Number: MMA0204TD5620DB300

Part Number: MMA0204TZ0000ZB300

M	M	A	0	2	0	4	T	D	5	6	2	0	D	B	3	0	0
M	M	A	0	2	0	4	T	Z	0	0	0	0	Z	B	3	0	0

TYPE/SIZE <b>MMA0204</b>	VERSION T = HT	TCR D = ± 25 ppm/K C = ± 50 ppm/K Z = Jumper	RESISTANCE 3 digit value 1 digit multiplier <b>Multiplier</b> 9 = *10 <sup>-1</sup> 0 = *10 <sup>0</sup> 1 = *10 <sup>1</sup> 2 = *10 <sup>2</sup> 3 = *10 <sup>3</sup> 4 = *10 <sup>4</sup> 5 = *10 <sup>5</sup> 0000 = Jumper	TOLERANCE D = ± 0.5 % F = ± 1 % Z = Jumper	PACKAGING B3 B0
-----------------------------	-------------------	---	--	---	-----------------------

Product Description: MMA 0204 - 25 0.5 % HT BL 562R

Product Description: MMA 0204 HT BL 0R0

MMA	0204	- 25	0.5 %	HT	BL	562R
MMA	0204	-	-	HT	BL	0R0
TYPE	SIZE	TCR	TOLERANCE	VERSION	PACKAGING	RESISTANCE
MMA	0204	± 25 ppm/K ± 50 ppm/K	± 0.5 % ± 1 %	HT = High temperature	BL B0	562R = 562 Ω 0R0 = Jumper

### Note

- Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION.

## PACKAGING

MODEL	CODE	QUANTITY	CARRIER TAPE	WIDTH	PITCH	REEL DIAMETER
MMA 0204 HT	B3 = BL	3000	Antistatic blister tape acc. 60286-3 type II	8 mm	4 mm	180 mm/7"
	B0	10 000				330 mm/13"

## TEMPERATURE COEFFICIENT AND RESISTANCE RANGE

DESCRIPTION		RESISTANCE
TCR	TOLERANCE	MMA 0204 HT
± 50 ppm/K	± 1 %	<b>47 Ω to 100 kΩ</b>
	± 0.5 %	47 Ω to 100 kΩ
± 25 ppm/K	± 1 %	47 Ω to 100 kΩ
	± 0.5 %	<b>47 Ω to 100 kΩ</b>
Jumper		≤ 10 mΩ, I <sub>max.</sub> = 3 A

### Notes

- Resistance ranges printed in bold are preferred TCR/tolerance combinations.
- Resistance values to be selected for ± 1 % tolerance from E24 and E96 and for ± 0.5 % tolerance from E24 and E192.


# MMA 0204 HT - Professional



Vishay Beyschlag

Professional High Temperature  
MINI-MELF Resistor

## DIMENSIONS

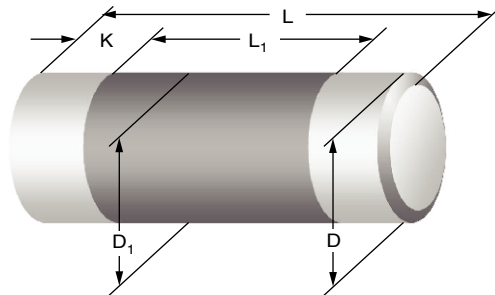


DIMENSIONS AND MASS						
TYPE	L (mm)	D (mm)	L <sub>1</sub> min. (mm)	D <sub>1</sub> (mm)	K (mm)	MASS (mg)
MMA 0204 HT	3.6 + 0/- 0.2	1.4 + 0/- 0.1	1.8	D + 0/- 0.15	0.8 ± 0.1	22

### Note

- Color code marking is applied according to IEC 60062<sup>(3)</sup> in four bands (E24 series) or five bands (E96 or E192 series). Each color band appears as a single solid line, voids are permissible if at least  $\frac{2}{3}$  of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands. An interrupted yellow band between the 4<sup>th</sup> and 5<sup>th</sup> full band indicates TC25.

## PATTERN STYLES FOR MELF RESISTORS

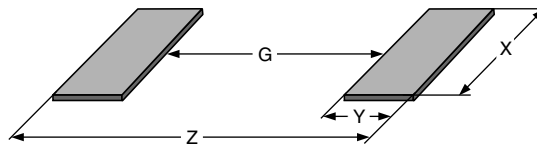

RECOMMENDED SOLDER PAD DIMENSIONS								
TYPE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
MMA 0204 HT	1.5	1.5	1.8	4.5	1.7	1.2	1.6	4.1

### Note

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC 7351. They do not guarantee any supposed thermal properties, however, they will be found adequate for most general applications.



### DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body ( $Al_2O_3$ ) and conditioned to achieve the desired temperature coefficient. Nickel plated steel termination caps are firmly pressed on the metallised rods. A special laser is used to achieve the target value by smoothly cutting a helical groove in the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating. Four or five colour code rings designate the resistance value and tolerance in accordance with **IEC 60062** <sup>(3)</sup>.

The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. This includes pulse load screening (for  $R \geq 10 \Omega$ ) and additional non-linearity screening (for  $R \geq 30 \Omega$ ) for the elimination of products with a potential risk of early life failures according to EN 140401-803, 2.1.2.2. Only accepted products are laid directly into the blister tape in accordance with **IEC 60286-3, Type II** <sup>(3)</sup> or bulk case in accordance with **IEC 60286-6** <sup>(3)</sup>.

### ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1** <sup>(3)</sup>. Solderability is specified for 2 years after production or requalification, however, excellent solderability is proven after extended storage in excess of 10 years. The permitted storage time is 20 years.

The resistors are completely lead (Pb)-free, the pure tin plating provides compatibility with lead (Pb)-free soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing.

The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

All products comply with the **GADSL** <sup>(1)</sup> and the **CEFIC-EECA-EICTA** <sup>(2)</sup> list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV) and Annex II (ELV II)
- 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

Solderability is specified for 2 years after production or requalification. The permitted storage time is 20 years.

### Notes


<sup>(1)</sup> Global Automotive Declarable Substance List, see [www.gadsl.org](http://www.gadsl.org).

<sup>(2)</sup> CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see [www.eicta.org/index.php?id=995](http://www.eicta.org/index.php?id=995)  
→ issues → environment policy → chemicals → chemicals for electronics.

<sup>(3)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.

### APPROVALS

The resistors are approved within the IECQ-CECC Quality Assessment System for Electronic Components to the detail specification **EN 140401-803** which refers to **EN 60115-1**, **EN 140400** and the variety of environmental test procedures of the **IEC 60068** <sup>(3)</sup> series.

Conformity is attested by the use of the **CECC** logo () as the mark of conformity on the package label.

Vishay Beyschlag has achieved “**Approval of Manufacture**” in accordance with **IEC QC 001002-3, clause 2**. The release certificate for “**Technology Approval Schedule**” in accordance with **CECC 240001** based on **IEC QC 001002-3, clause 6** is granted for the Vishay Beyschlag manufacturing process.

The resistors are qualified according to AEC-Q200.

### RELATED PRODUCTS


A wider range of TCR, tolerance and resistance values, plus the option of values from a different E series is available with products approved to **EN 140401-803**, Version A, without established reliability, nominal failure rate level E0 (Quality factor  $\pi_Q = 3$ ). See the datasheets:

- “Professional MELF Resistors” ([www.vishay.com/doc?28713](http://www.vishay.com/doc?28713))
- “Precision MELF Resistors” ([www.vishay.com/doc?28714](http://www.vishay.com/doc?28714))
- “High Precision MELF Resistor” ([www.vishay.com/doc?28715](http://www.vishay.com/doc?28715))


For products with superior pulse load capability, see the datasheets:

- “High Pulse Load Carbon Film MINI-MELF Resistor” ([www.vishay.com/doc?28717](http://www.vishay.com/doc?28717))
- “High Pulse Load Carbon Film MELF Resistor” ([www.vishay.com/doc?28755](http://www.vishay.com/doc?28755))

## FUNCTIONAL PERFORMANCE

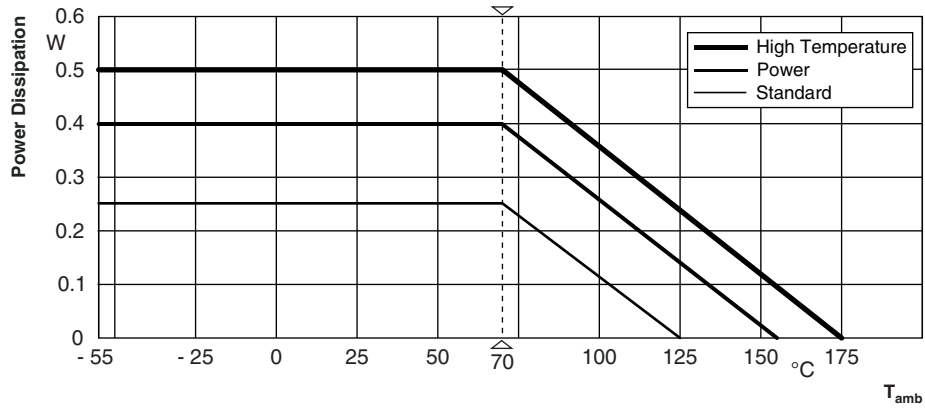


### Derating for Operation Modes

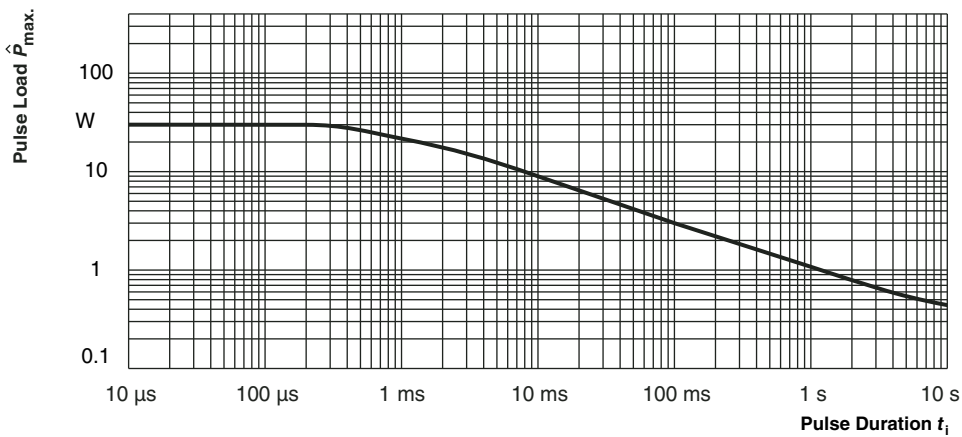


### Single Pulse

Maximum pulse load, single pulse; applicable if  $\bar{P} \rightarrow 0$  and  $n \leq 1000$  and  $\hat{U} \leq \hat{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

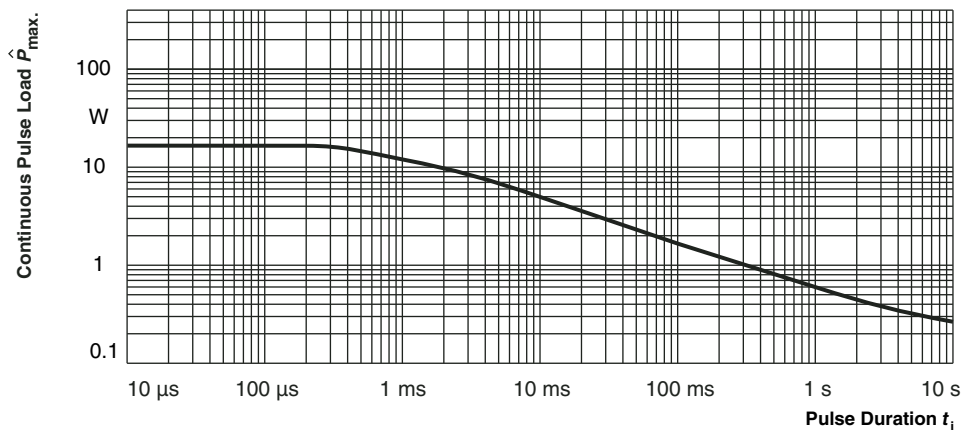


### Continuous Pulse

Maximum pulse load, continuous pulses; applicable if  $\bar{P} \leq P(\vartheta_{amb})$  and  $\hat{U} \leq \hat{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

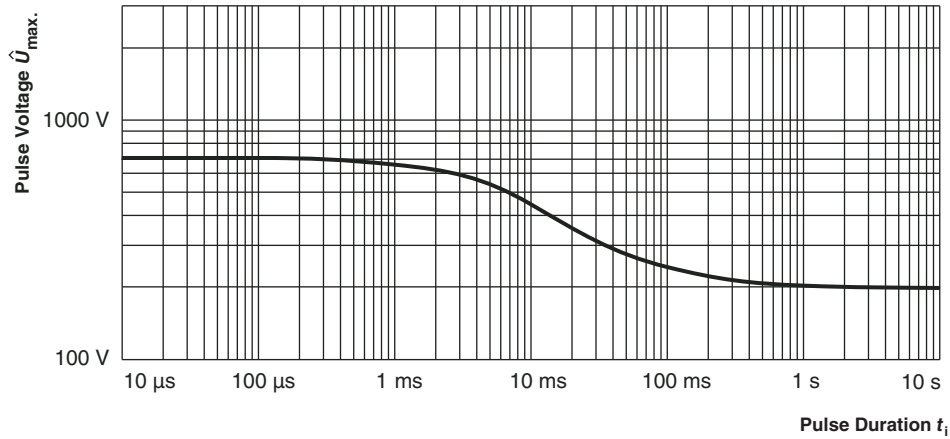


### Pulse Voltage

Maximum pulse voltage, single and continuous pulses; applicable if  $\hat{P} \leq \hat{P}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

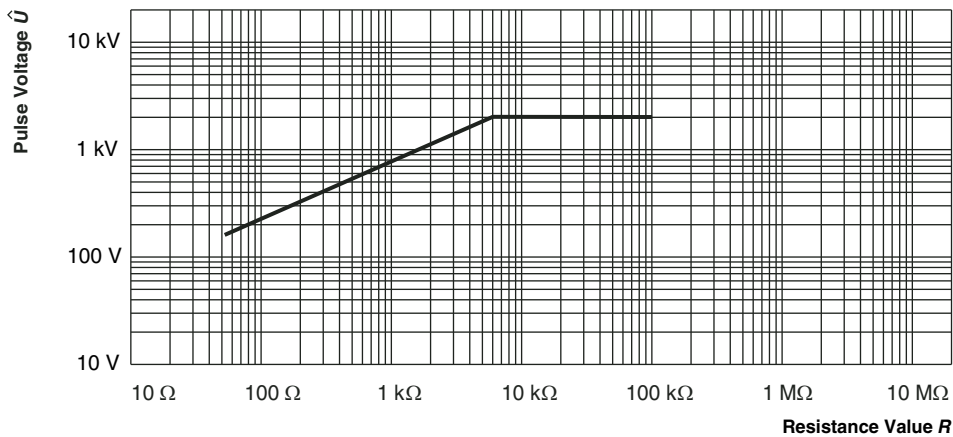


### 1.2/50 Pulse

Pulse load rating in accordance with IEC 60115-1, 4.27; 1.2  $\mu$ s/50  $\mu$ s; 5 pulses at 12 s intervals; for permissible resistance change 0.5 %

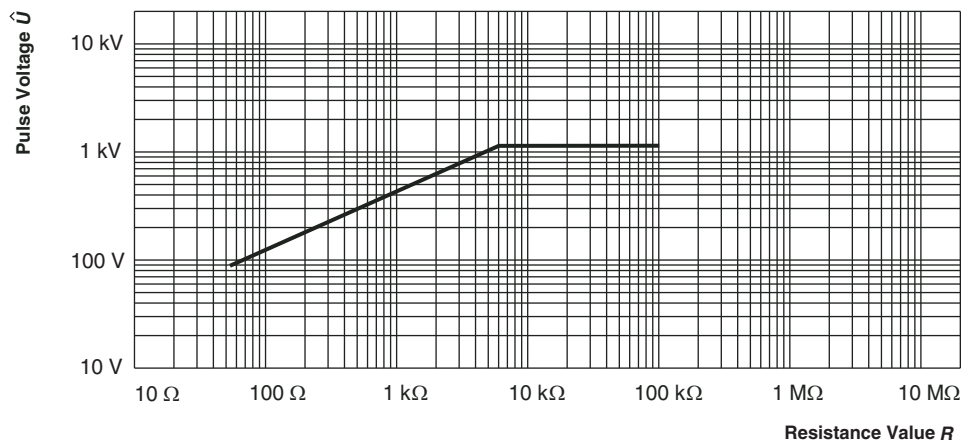


### 10/700 Pulse

Pulse load rating in accordance with IEC 60115-1, 4.27; 10  $\mu$ s/700  $\mu$ s; 10 pulses at 1 min intervals; for permissible resistance change 0.5 %

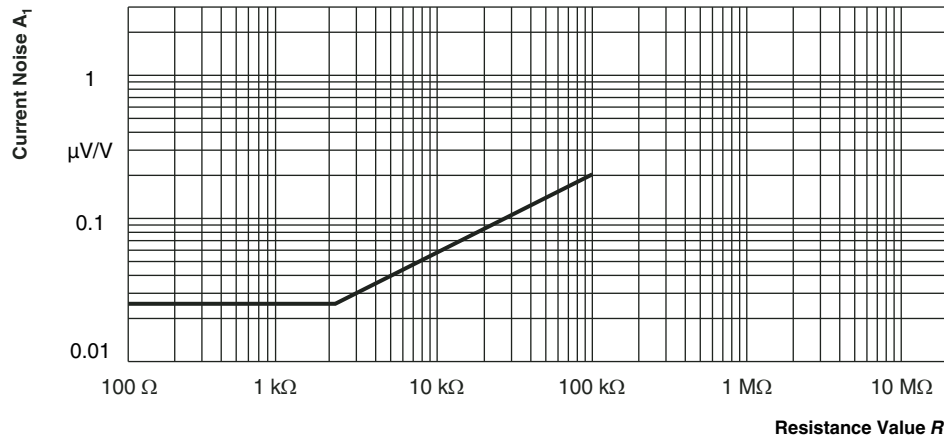

In accordance with IEC 60195

### Current Noise - A<sub>1</sub>

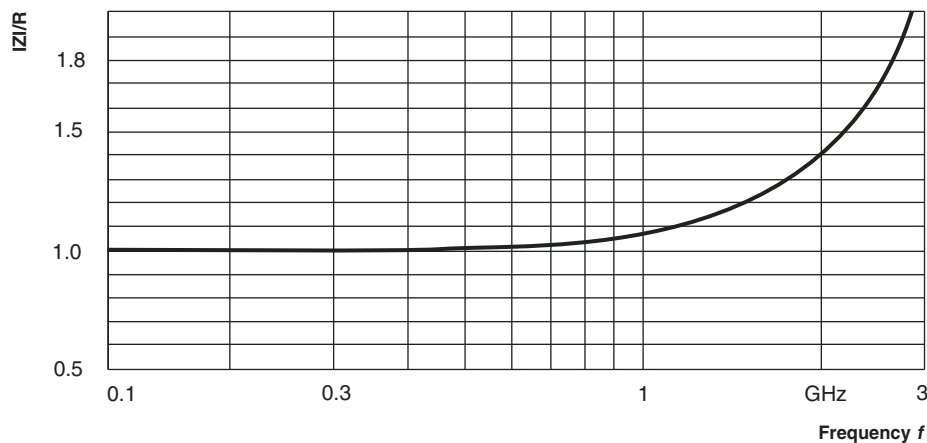

|Z|/R for 49.9 Ω MELF resistors

### RF - Behaviour

## TEST AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 140400, sectional specification

EN 140401-803, detail specification

The resistors are approved within the IECQ-CECC Quality Assessment System for Electronic Components. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 5.3<sup>(3)</sup>. Climatic category LCT/UCT/56 (rated temperature range: Lower category temperature, upper category temperature; damp heat, steady state, test duration 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on printed-circuit boards in accordance with EN 140400, 2.3.3, unless otherwise specified.

The requirements stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-803. However, some additional tests and a number of improvements against those minimum requirements have been included. The stated requirements for long-term tests are typically fulfilled with a statistical safety of at least  $\bar{x} + 5 s$ .





TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ )
				STABILITY CLASS 0.25 OR BETTER
			Stability for product types:	
			<b>MMA 0204 HT</b>	47 $\Omega$ to 100 k $\Omega$
4.5	-	Resistance	-	$\pm 1\% R$ ; $\pm 0.5\% R$
4.8.4.2	-	Temperature coefficient	At (20/- 55/20) °C and (20/155/20) °C	$\pm 50$ ppm/K; $\pm 25$ ppm/K
4.25.1	-	Endurance at 70 °C: Standard operation mode	$U = \sqrt{P_{70}} \times R \leq U_{max.}$ ; 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm (0.10\% R + 10 \text{ m}\Omega)$ $\pm (0.15\% R + 10 \text{ m}\Omega)$
		Endurance at 70 °C: Power operation mode	$U = \sqrt{P_{70}} \times R \leq U_{max.}$ ; 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm (0.15\% R + 10 \text{ m}\Omega)$ $\pm (0.35\% R + 10 \text{ m}\Omega)$
		Endurance at 70 °C: High temperature mode	$U = \sqrt{P_{70}} \times R \leq U_{max.}$ ; 1.5 h on; 0.5 h off; 70 °C; 1000 h	$\pm (0.25\% R + 10 \text{ m}\Omega)$
4.25.3	-	Endurance at upper category temperature	125 °C; 1000 h	$\pm (0.05\% R + 5 \text{ m}\Omega)$
			155 °C; 1000 h	$\pm (0.15\% R + 5 \text{ m}\Omega)$
			175 °C; 1000 h	$\pm (0.25\% R + 5 \text{ m}\Omega)$
4.24	78 (Cab)	Damp heat, steady state (standard mode)	(40 $\pm$ 2) °C; 56 days; $U = 0.3 \times U_{rated.}$ ; (93 $\pm$ 3) % RH	$\pm (0.15\% R + 10 \text{ m}\Omega)$
4.39	67 (Cy)	Damp heat, steady state, accelerated (standard mode)	(85 $\pm$ 2) °C; (85 $\pm$ 5) % RH; $U = 0.3 \times U_{rated.}$ ; 1000 h	$\pm (0.25\% R + 10 \text{ m}\Omega)$
4.23	2 (Bb) 30 (Db) 1 (Ab) 13 (M) 30 (Db) -	Climatic sequence: Dry heat Damp heat, cyclic Cold Low air pressure Damp heat, cyclic DC load (High temperature mode)	UCT; 16 h 55 °C; 24 h; $\geq 90\%$ RH; 1 cycle LCT; 2 h 8.5 kPa; 2 h; (25 $\pm$ 10) °C 55 °C; 24 h; $\geq 90\%$ RH; 5 cycles $U = \sqrt{P_{70}} \times R \leq U_{max.}$ ; 1 min LCT = - 55 °C; UCT = 155 °C	$\pm (0.15\% R + 10 \text{ m}\Omega)$
4.23.2				
4.23.3				
4.23.4				
4.23.5				
4.23.6				
4.23.7				
-	1 (Ab)	Cold	- 55 °C; 2 h	$\pm (0.05\% R + 5 \text{ m}\Omega)$
4.19	14 (Na)	Rapid change of temperature	30 min at LCT; 30 min at UCT; LCT = - 55 °C; UCT = 125 °C 5 cycles	$\pm (0.05\% R + 10 \text{ m}\Omega)$ $\pm (0.15\% R + 10 \text{ m}\Omega)$
			1000 cycles	
			LCT = - 55 °C; UCT = 155 °C 1000 cycles	$\pm (0.25\% R + 10 \text{ m}\Omega)$
4.13	-	Short time overload: Standard operation mode	$U = 2.5 \times \sqrt{P_{70}} \times R \leq 2 \times U_{max.}$ ; 5 s	$\pm (0.03\% R + 5 \text{ m}\Omega)$

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ )
				STABILITY CLASS 0.25 OR BETTER
			Stability for product types:	
			<b>MMA 0204 HT</b>	47 $\Omega$ to 100 k $\Omega$
4.27	-	Single pulse high voltage overload; Standard operation mode	Severity no. 4: $U = 10 \times \sqrt{P_{70}} \times R \leq 2 \times U_{max.}$ ; 10 pulses 10 $\mu$ s/700 $\mu$ s	$\pm (0.25 \% R + 5 \text{ m}\Omega)$
4.37	-	Periodic electric overload; Standard operation mode	$U = \sqrt{15} \times P_{70} \times R \leq 2 \times U_{max.}$ ; 0.1 s on; 2.5 s off; 1000 cycles	$\pm (0.5 \% R + 5 \text{ m}\Omega)$
4.22	6 (Fc)	Vibration	Endurance by sweeping; 10 Hz to 2000 Hz; no resonance; amplitude $\leq 1.5 \text{ mm}$ or $\leq 200 \text{ m/s}^2$ ; 7.5 h	$\pm (0.05 \% R + 5 \text{ m}\Omega)$
4.40	-	Electrostatic discharge (Human Body Model)	IEC 61340-3-1*; 3 pos. + 3 neg. discharges MMA 0204: 2 kV	$\pm (0.5 \% R + 50 \text{ m}\Omega)$
4.17.2	58 (Td)	Solderability	Solder bath method; SnPb40; non-activated flux; (215 $\pm$ 3) $^{\circ}$ C; (2 $\pm$ 0.3) s	Good tinning ( $\geq 95 \%$ covered); No visible damage
			Solder bath method; SnAg3Cu0.5 or SnAg3.5; non-activated flux; (235 $\pm$ 3) $^{\circ}$ C; (2 $\pm$ 0.3) s	Good tinning ( $\geq 95 \%$ covered); No visible damage
4.18.2	58 (Td)	Resistance to soldering heat	Solder bath method; (260 $\pm$ 5) $^{\circ}$ C; (10 $\pm$ 1) s	$\pm (0.05 \% R + 10 \text{ m}\Omega)$
			Reflow method 2 (IR/forced gas convection); (260 $\pm$ 5) $^{\circ}$ C; (40 $\pm$ 1) s (3 times)	$\pm (0.03 \% R + 10 \text{ m}\Omega)$
4.29	45 (XA)	Component solvent resistance	Isopropyl alcohol; 50 $^{\circ}$ C; method 2	No visible damage
4.30	45 (XA)	Solvent resistance of marking	Isopropyl alcohol; 50 $^{\circ}$ C; method 1, toothbrush	Marking legible; No visible damage
4.32	21 (Ue <sub>3</sub> )	Shear	45 N	No visible damage
4.33	21 (Ue <sub>1</sub> )	Substrate bending	Depth 2 mm, 3 times	No visible damage, no open circuit in bent position $\pm (0.05 \% R + 5 \text{ m}\Omega)$
4.7	-	Voltage proof	$U_{RMS} = U_{ins.}$ ; 60 s	No flashover or breakdown
4.35	-	Flammability	IEC 60 695-11-5, needle flame test; 10 s	No burning after 30 s

**Note**

- The quoted IEC standards are also released as EN standards with the same number and identical contents.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**