


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
DF	D0		F1	UPDATE PER ECO-05-001211	13 APR 05	MJS
						MKS

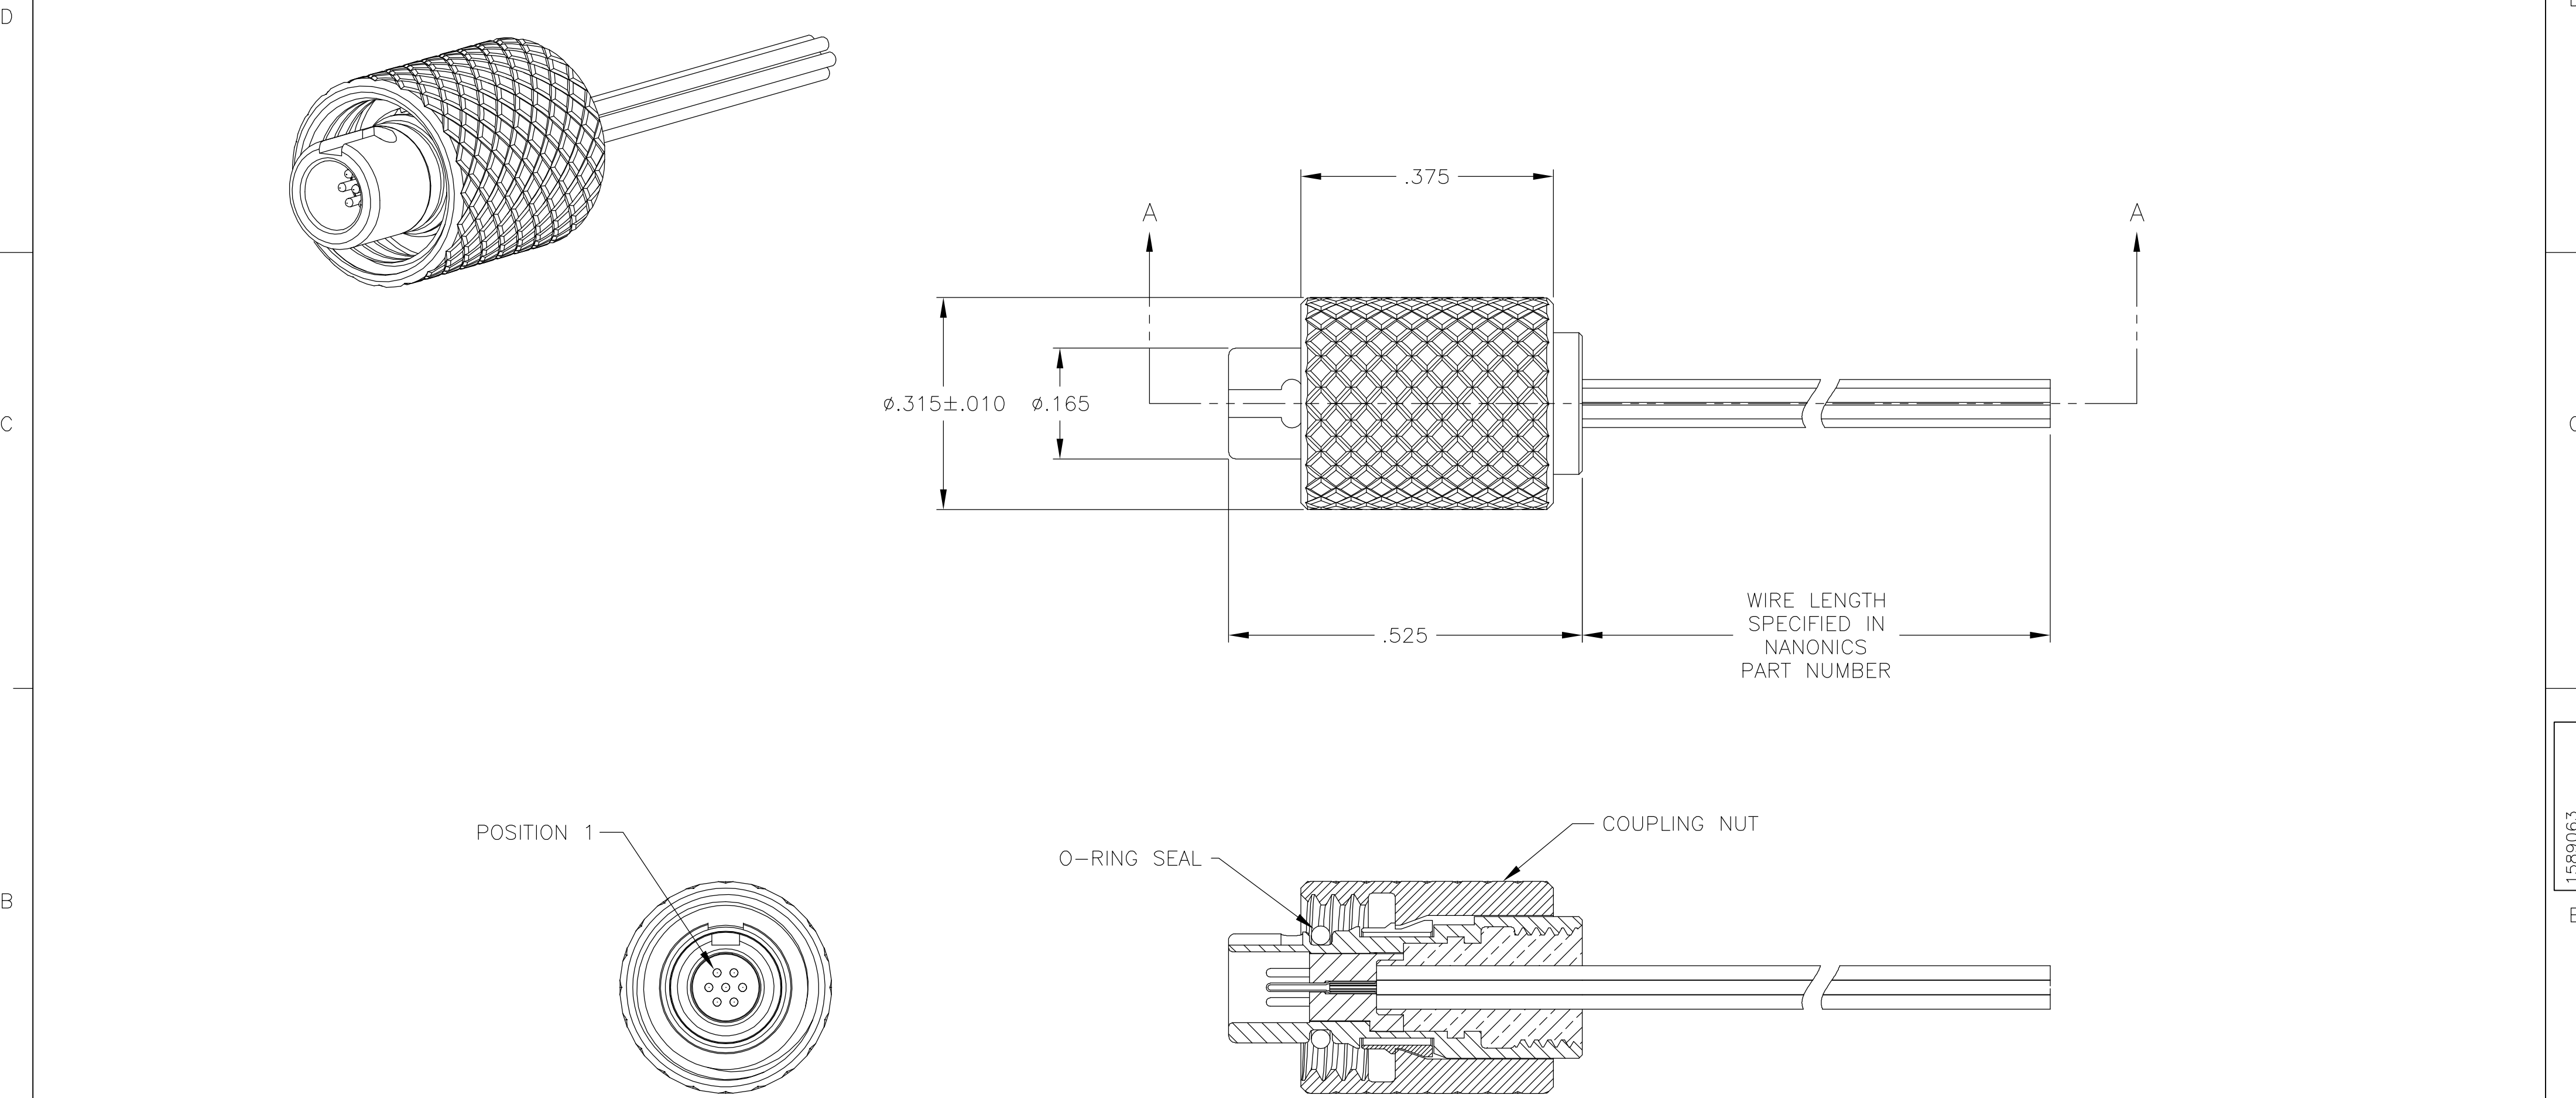

1. CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER MIL-C-26074
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER MIL-C-26074
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
O-RING MATERIAL: FLUOROSILICONE
2. WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
3. LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION, TYCO P/N 997053-1
4. THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS 303-0032

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 27 MAY 99		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608						
		CHK E. PAULUS 11 JUN 99								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME						
		APVD S. KAIN 27 JAN 00		PLUG ASSEMBLY, CIRCULAR, THREADED COUPLING, METAL, 7 POSITION						
		PRODUCT SPEC —								
		APPLICATION SPEC —								
		WEIGHT —								
MATERIAL		FINISH		SIZE A2	CAGE CODE 00779	DRAWING NO C-1589063	RESTRICTED TO —			
SEE NOTES		SEE NOTES		CUSTOMER DRAWING				SCALE 6:1	SHEET 1 of 1	REV F1