

## **SPECIFICATIONS**

### Mechanical

Contact Retention Force: 0.30kg (0.66Lbs) min. per Contact

Durability: 25 Cycles

### **Electrical**

**Contact Current Rating:** 0.5A max. **Insulation Resistance:** 1 MW min.

Dielectric Withstanding Voltage: 500V DC at Sea Level Low Level Contact Resistance: 50mW max. initial

# **Physical**

Housing: Thermoplastic, UL 94V-0 rated in Black Color

Ejector: Thermoplastic, UL 94V-0 rated in Ivory or Natural Color

Contact: Copper alloy Pad: Copper alloy


Operating Temperature: 0 to +85

## Mini Dimm Connector

AUM Series R/A SMT Type 0.60mm [.024"] Pitch 244 Pos.




# **DRAWING**

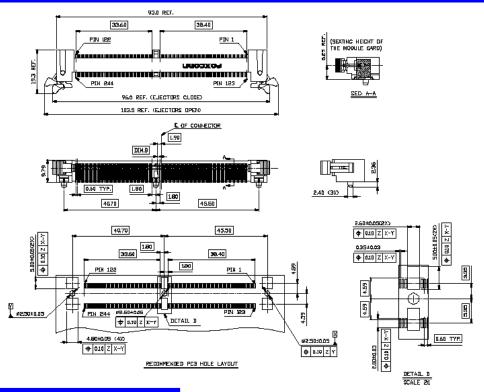

# ORDERING INFORMATION

#### PRODUCT NOMENCLATURE:



AUMC2**-AEDR-**	1.30
PART NO.	DIM. B