




DEPASSEMENT DES CONTACTS
CONTACT EXTENSION
KONTAKTUBERSTAND

N° du FABR. MANUF. N° HERST. N°	RÉFÉRENCE PART No BEZEICHNUNG	A max. inches mm.	C max. inches mm.	D +0.20 -0.008 inches mm.
9	RSM 5154- 3-**-P	.980 24.89	.439 11.15	.451 11.45
9	RSM 5154- 7-**-P	1.121 28.47	.574 14.58	.586 14.88
9	RSM 5154-12-**-P	1.261 32.03	.709 18.01	.721 18.31
9	RSM 5154-19-**-P	1.384 35.16	.848 21.54	.860 21.84
9	RSM 5154-27-**-P	1.574 39.98	1.004 25.50	1.016 25.80

COMPAGNIE DEUTSCH

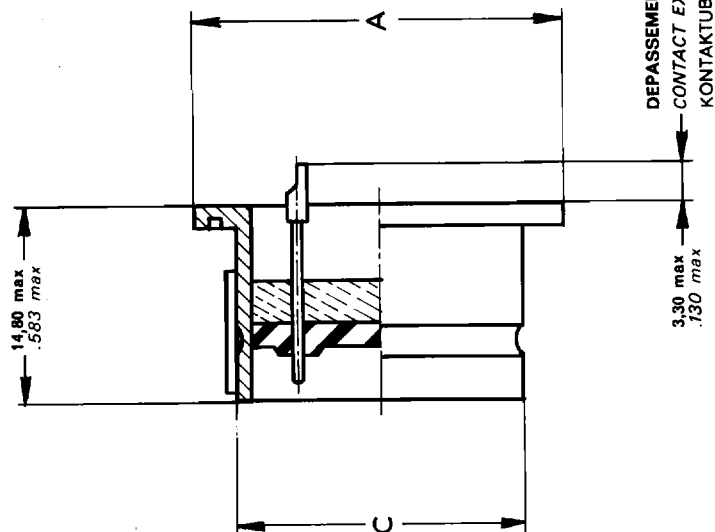

EMBASE HERMETIQUE A SOUDER
HERMETIC RECEPTACLE, SOLDER TYPE MOUNTING
HERMETIKSTECKDOSE ZUM LÖTEN

1. Pour les brochages et les positionnements des isolants voir pages 10 à 12.
NOTE.

1. For contact arrangements and alternate insert positions see pages 10 to 12.
NOTE.

1. Für Kontaktanordnungen und Winkelstellungen siehe Seite 10 bis 12.
ANMERKUNG.