


ELFK 45° Pluggable Terminal Blocks .200"

New ELFK Series 45° pluggable terminal blocks improve wiring flexibility and access to wires and screws in applications where a high number of terminations are required in a minimum of space. Universal design ensures complete intermatibility with both PCD ELFH Series and competitive headers. Precision-molded housings allow for termination of wires whether the connector is plugged or unplugged. Part numbers listed are for black. To order green, change the last character in the part number from 0 to G.

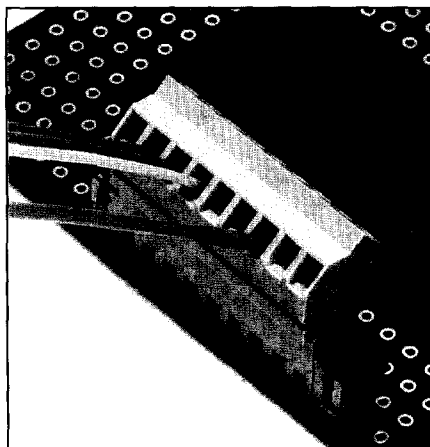

- ACCEPTS #12 TO #26 AWG
- ANGLED WIRE AND SCREW ACCESS FOR TIGHT APPLICATIONS
- MOVING VISE CLAMP WIRE TERMINATION

MATERIALS:

Contact: Phosphor bronze

Plating: Electrolytic tin (selective gold available)

Hardware: #4-40 steel screw, nickel plated

Housing: Black or green UL94V-0 thermoplastic

SPECIFICATIONS:

Maximum Operating Temperature: 105° C

Dielectric Withstanding: 1600 V

Current Rating: 15 A

Operating Voltage: 300 V

Insulation Resistance: 10¹¹ ohms

Wire Range: # 12-26 AWG stranded, # 14-26 AWG solid

Wire Pullout Force: Per UL486E




INSTALLATION:

Wire Strip Length: .250"

Tightening Torque: 7 in.-lbs.

APPROVALS:

 UL recognized, CSA approval pending.

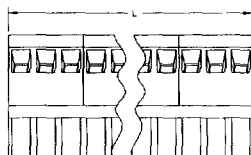

POS	.200" CENTERS (A)	
	CATALOG #	L INCHES
2	ELFK02210	0.40
3	ELFK03210	0.60
4	ELFK04210	0.80
5	ELFK05210	1.00
6	ELFK06210	1.20
7	ELFK07210	1.40
8	ELFK08210	1.60
9	ELFK09210	1.80
10	ELFK10210	2.00
11	ELFK11210	2.20
12	ELFK12210	2.40
13	ELFK13210	2.60
14	ELFK14210	2.80
15	ELFK15210	3.00
16	ELFK16210	3.20
17	ELFK17210	3.40
18	ELFK18210	3.60
19	ELFK19210	3.80
20	ELFK20210	4.00
21	ELFK21210	4.20
22	ELFK22210	4.40
23	ELFK23210	4.60
24	ELFK24210	4.80