

MD SERIES P22TG-XXXXE2:1H35 3.5 KV ISOLATED 5 W REGULATED SINGLE OUTPUT DIP24

Available Inputs:

12, 24 and 48 VDC Wide Input 2:1

Available Outputs:

3.3, 5, 12, 15 and 18 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 9 - 18 VDC (12 VDC), 18 - 36 VDC (24 VDC), 36 - 72 VDC (48 VDC)
 Filter Pi Network

Isolation Specifications

Rated voltage 3500 Vdc
 Leakage current 1 mA
 Resistance 10⁹ Ohm
 Capacitance 120 pF typ.

Output Specifications

Voltage accuracy +/- 1 % typ. +/-2% max.
 Ripple and noise (at 20 MHz BW) 60 mV p-p, max.
 Short circuit protection Continuous , restart automatic
 Line voltage regulation +/- 0,5 % max.
 Load voltage regulation +/- 0,5 % max.
 Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 70 % to 85 %
 Switching frequency 250 KHz, typ.

Environmental Specifications

Operating temperature (ambient) -40°C to +85°C
 Storage temperature - 55 °C to + 125 °C
 Derating See graph
 Humidity Up to 90 %, non condensing
 Cooling Free air convection


Physical Characteristics

Dimensions 31,75 x 20,32 x 10,16 mm
 1,25 x 0,80 x 0,40 inches
 Weight 17,0 g
 Case material Non conductive black plastic


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P22TG-1205E2:1H35	9-18	27	563	5	1000	74
P22TG-1215E2:1H35	9-18	27	520	15	333	80
P22TG-2405E2:1H35	18-36	25	282	5	1000	74
P22TG-2412E2:1H35	18-36	25	264	12	417	79
P22TG-2415E2:1H35	18-36	25	250	15	333	80
P22TG-4805E2:1H35	36-72	24	139	5	1000	75
P22TG-4812E2:1H35	36-72	24	132	12	417	79

Dimensions

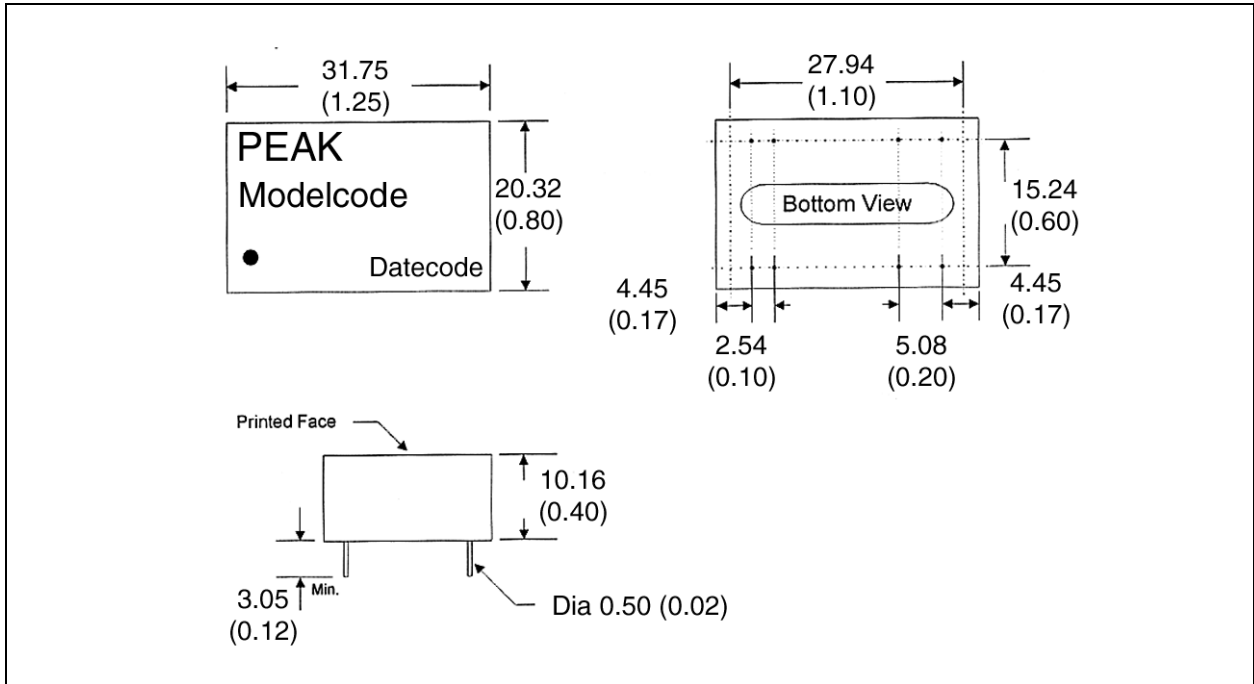

Derating Graph and Pinning

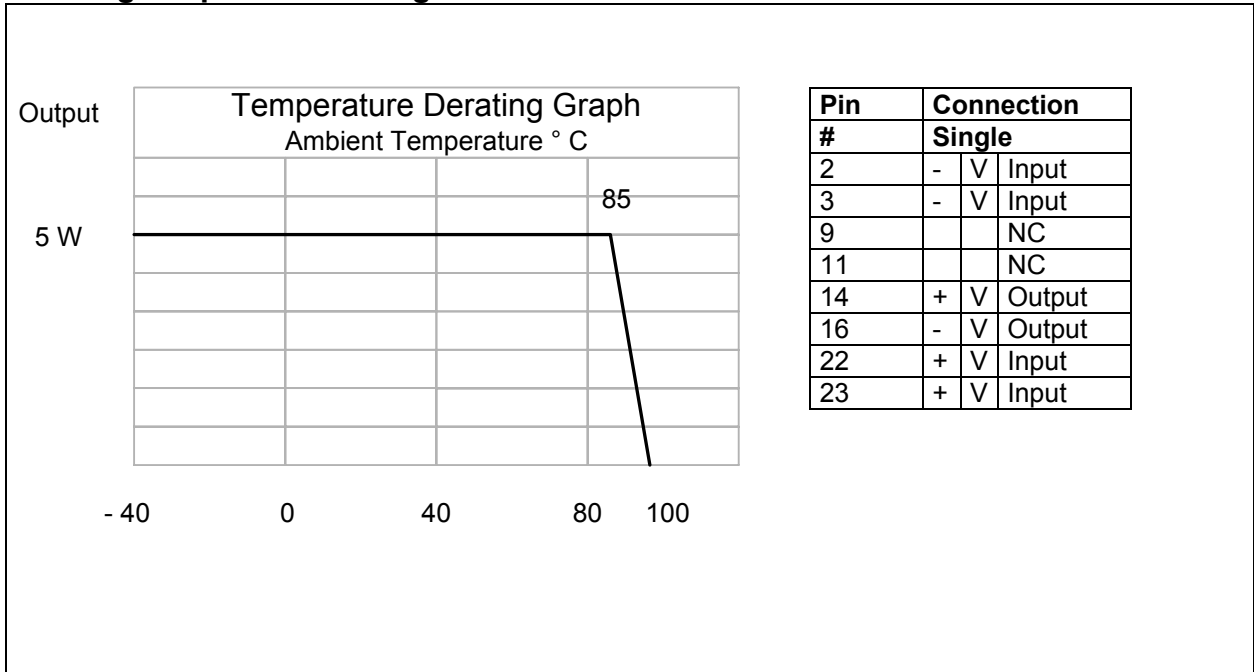

Specification can be changed without notice.

Copyright PEAK electronics GmbH