



1 Form A Solid State Relay

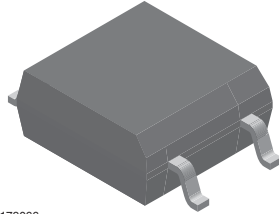

i179066

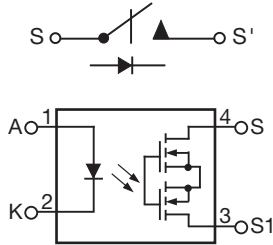

20050

FEATURES

- Maximum R_{ON} 5 Ω
- Load voltage 60 V
- Load current 100 mA
- Isolation test voltage 1500 V_{RMS}
- Small 4 pin SOP package
- Clean bounce free switching
- TTL/CMOS compatible input
- High reliability hybrid receptor
- Available on tape and reel
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC


RoHS
COMPLIANT

APPLICATIONS

- Security systems
- Instrumentation
- Industrial controls

AGENCY APPROVALS

UL: file no. E300068 system code K

cUL: file no. E300068



Note

- IEC 60747-5-2 (VDE 0884) capable, consult sales representative for details

DESCRIPTION

The VO1400AEFTR is an optically isolated 1 form A solid-state relay in a surface mount 4 pin SOP package.

ORDERING INFORMATION

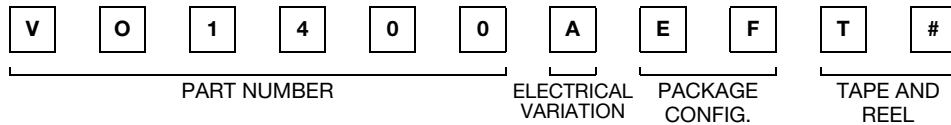

| PACKAGE | UL, cUL |
|--|-------------|
| SOP-4, Tape and reel | VO1400AEFTR |
| SOP-4, Tape and reel (product rotated in tape) | VO1400AEFT2 |

ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
|--------------------------------------|---------------------------|------------|---------------|--------------------|
| INPUT | | | | |
| LED continuous forward current | | I_F | 50 | mA |
| LED reverse voltage | | V_R | 5 | V |
| OUTPUT | | | | |
| DC or peak AC load voltage | | V_L | 60 | V |
| Load current AC peak | | I_L | 100 | mA |
| Peak load current | $t = 10\text{ ms}$ | I_{LPK} | 350 | mA |
| SSR | | | | |
| Total power dissipation | | P_{diss} | 400 | mW |
| Ambient temperature range | | T_{amb} | - 40 to + 85 | $^{\circ}\text{C}$ |
| Storage temperature range | | T_{stg} | - 40 to + 125 | $^{\circ}\text{C}$ |
| Soldering temperature ⁽¹⁾ | $t \leq 10\text{ s max.}$ | T_{sld} | 260 | $^{\circ}\text{C}$ |
| Isolation test voltage | $t = 1\text{ s}$ | V_{ISO} | 1500 | V_{RMS} |

Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

⁽¹⁾ Refer to reflow profile for soldering conditions for surface mounted devices.

ABSOLUTE MAXIMUM RATING CURVE


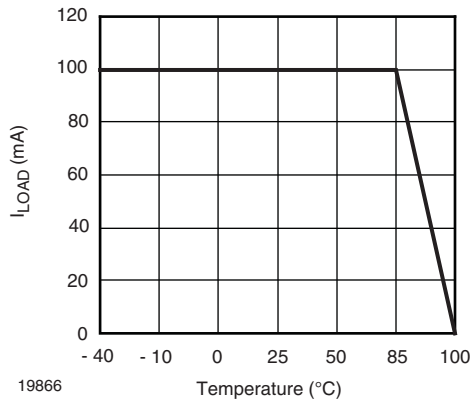


Fig. 1 - I_{LOAD} vs. Temperature

| THERMAL CHARACTERISTICS | | | |
|---|----------------|-------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| LED power dissipation | P_{diss} | 60 | mW |
| Output power dissipation | P_{diss} | 50 | mW |
| Total power dissipation | P_{tot} | 110 | mW |
| Maximum LED junction temperature | $T_{jmax.}$ | 125 | °C |
| Maximum output die junction temperature | $T_{jmax.}$ | 125 | °C |
| Thermal resistance, junction emitter to board | θ_{JEB} | 114 | °C/W |
| Thermal resistance, junction emitter to case | θ_{JEC} | 99 | °C/W |
| Thermal resistance, junction detector to board | θ_{JDB} | 60 | °C/W |
| Thermal resistance, junction detector to case | θ_{JDC} | 80 | °C/W |
| Thermal resistance, junction emitter to junction detector | θ_{JED} | 115 | °C/W |
| Thermal resistance, case to ambient | θ_{CA} | 2396 | °C/W |

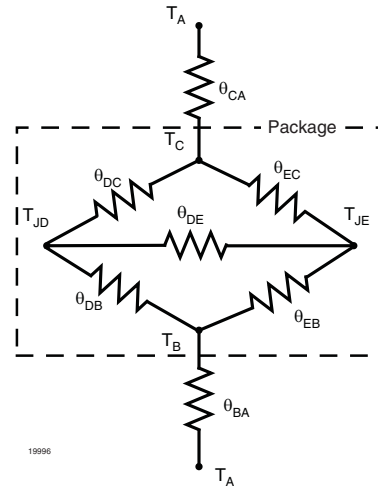

Note


- The thermal model is represented in the thermal network below. Each resistance value given in this model can be used to calculate the temperatures at each node for a given operating condition. The thermal resistance from board to ambient will be dependent on the type of PCB, layout and thickness of copper traces. For a detailed explanation of the thermal model, please reference Vishay's Thermal Characteristics of Optocouplers application note.

| ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | | | |
|--|--|------------|------|-------|------|---------------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| INPUT | | | | | | |
| LED forward current, switch turn-on | $I_L = 100\text{ mA}$, $V_L \leq 0.5\text{ V}$, $t = 10\text{ ms}$ | I_{Fon} | 0.3 | 1 | 3.2 | mA |
| LED forward current, switch turn-off | $V_L = 60\text{ V}$ | I_{Foff} | 100 | 150 | | μA |
| LED reverse current | $V_R = 5\text{ V}$ | I_R | | 0.001 | 10 | μA |
| LED forward voltage | $I_F = 5\text{ mA}$ | V_F | 0.8 | 1.1 | 1.4 | V |
| LED reverse voltage | $I_R = 10\text{ }\mu\text{A}$ | V_R | 5 | 40 | | V |
| OUTPUT | | | | | | |
| On-resistance | $I_F = 10\text{ mA}$, $I_L = 100\text{ mA}$ | R_{ON} | | 2.3 | 5 | Ω |
| Off-state leakage current | $I_F = 0\text{ mA}$, $V_L = 60\text{ V}$ | I_{LEAK} | | 0.002 | 1 | μA |

Note

- Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

| SWITCHING CHARACTERISTICS | | | | | | |
|----------------------------------|--|-----------|------|------|------|---------------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| Turn-on time | $I_F = 10\text{ mA}$, $V_L = 20\text{ V}$, $I_L = 100\text{ mA}$ | t_{on} | | 52 | 500 | μs |
| Turn-off time | $I_F = 10\text{ mA}$, $V_L = 20\text{ V}$, $I_L = 100\text{ mA}$ | t_{off} | | 36 | 500 | μs |

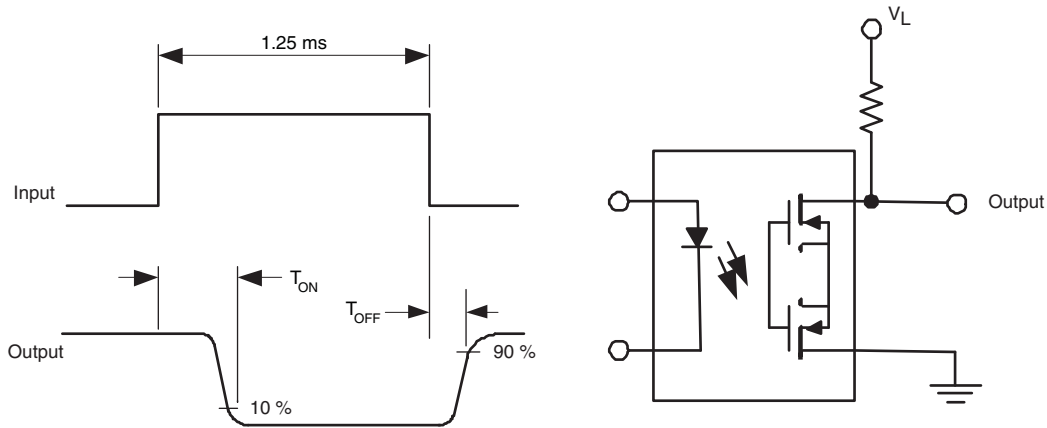

20991-1

| SAFETY AND INSULATION RATINGS | | | | |
|---|--|------------|----------------|------------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| Climatic classification | IEC 68 part 1 | | 40/85/21 | |
| Pollution degree | DIN VDE 0109 | | 2 | |
| Tracking resistance (comparative tracking index) | Insulation group IIIa | CTI | 175 | |
| Highest allowable overvoltage | Transient overvoltage | V_{IOTM} | 6000 | V_{peak} |
| Maximum working insulation voltage | Recurring peak voltage | V_{IORM} | 707 | V_{peak} |
| Insulation resistance at 25 °C | $V_{IO} = 500\text{ V}$ | R_{IS} | $\geq 10^{12}$ | Ω |
| Insulation resistance at T_S | $V_{IO} = 500\text{ V}$ | R_{IS} | $\geq 10^9$ | Ω |
| Insulation resistance at 100 °C | $V_{IO} = 500\text{ V}$ | R_{IS} | $\geq 10^{11}$ | Ω |
| Partial discharge test voltage | Method a, $V_{pd} = V_{IORM} \times 1.875$ | V_{pd} | 1325 | V_{peak} |
| Isolation test voltage, 1 s | | V_{RMS} | 1800 | V_{RMS} |
| Safety limiting values - maximum values allowed in the event of a failure | Output power | P_{SO} | 400 | mW |
| | Input current | I_{SI} | 150 | mA |
| | Case temperature | T_{SI} | 165 | °C |
| Minimum external air gap (clearance distance) | Measured from input terminals to output terminals, shortest distance through air | | ≥ 5 | mm |
| Minimum external tracking (creepage distance) | Measured from input terminals to output terminals, shortest distance path along body | | ≥ 5 | mm |

Note

- This SSR is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of protective circuits.

TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ °C}$, unless otherwise specified)

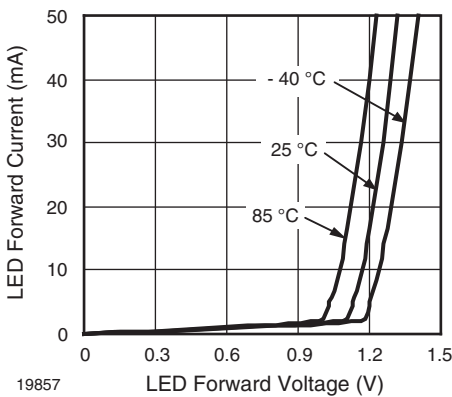


Fig. 2 - Typical LED Forward Voltage vs. Current

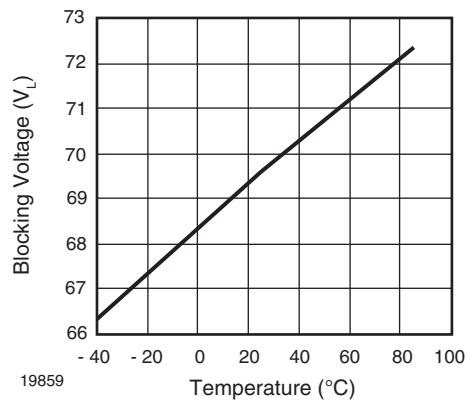


Fig. 3 - Typical Blocking Voltage vs. Temperature

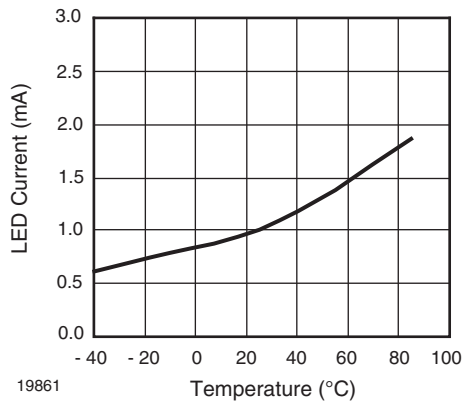


Fig. 4 - Typical I_F for Switch Operation vs. Temperature (Load Current = 100 mA)

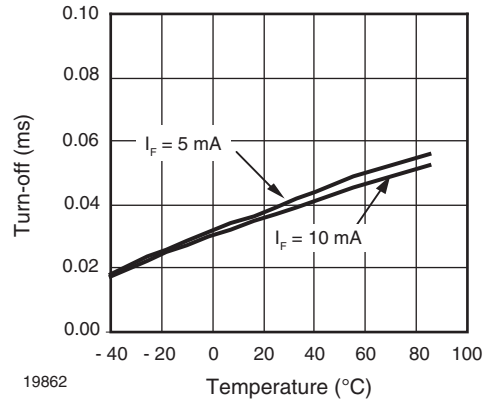


Fig. 7 - Typical Turn-off vs. Temperature (Load Current = 100 mA)

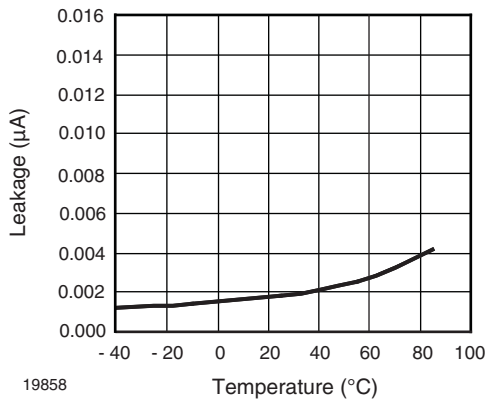


Fig. 5 - Typical Leakage vs. Temperature ($V_L = 60 V$)

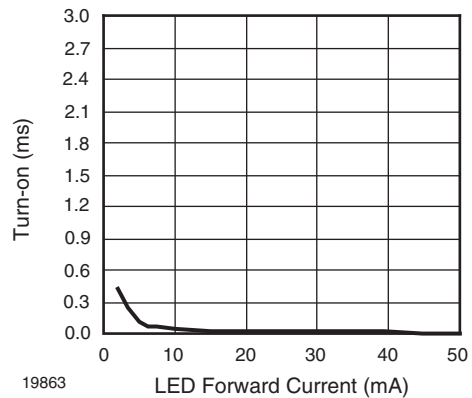


Fig. 8 - Typical Turn-on vs. LED Forward Current (Load Current = 100 mA)

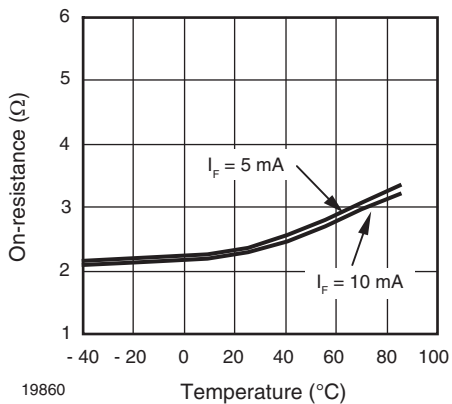


Fig. 6 - Typical On-resistance vs. Temperature (Load Current = 100 mA)


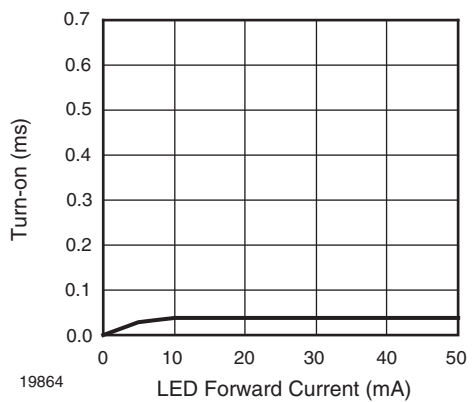


Fig. 9 - Typical Turn-off vs. LED Forward Current (Load Current = 100 mA)

PACKAGE DIMENSIONS in millimeters



PACKAGE MARKING

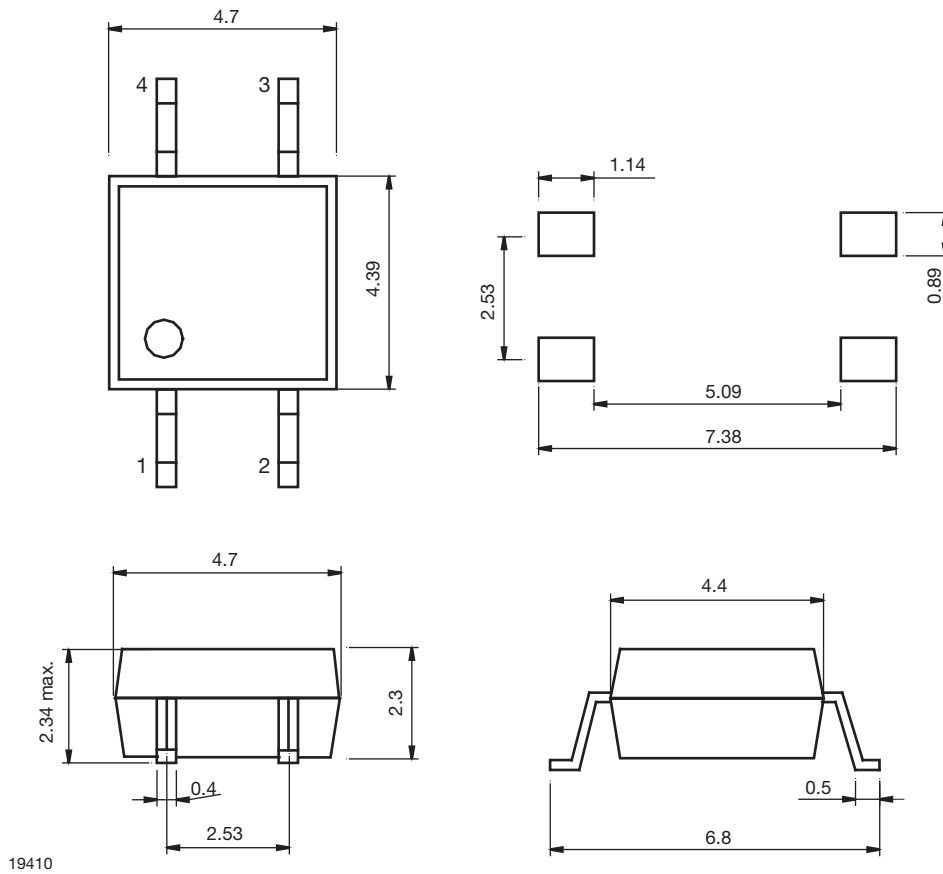

Note

- Tape and reel suffix (TR) is not part of the package marking.

ESD CAUTION

This is an ESD (electro static discharge) sensitive device. Electrostatic charges accumulate on the human body and test equipment and can discharge without detection. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality. ESD withstand voltage of this device is up to 1500 V acc. to JESD22-A114-B.



20055_1



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.