

A11a**DIP PLUG****PITCH: 2.0mm****MATERIAL****INSULATOR** - PBT (UL 94V-0)**CONTACT** - COPPER ALLOY**SPECIFICATIONS****CURRENT RATING**

1 AMP DC

CONTACT RESISTANCE

30 MILLIOHM MAX.

INSULATION RESISTANCE


1000 MEGOHM MIN.

DIELECTRIC VOLTAGE

500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

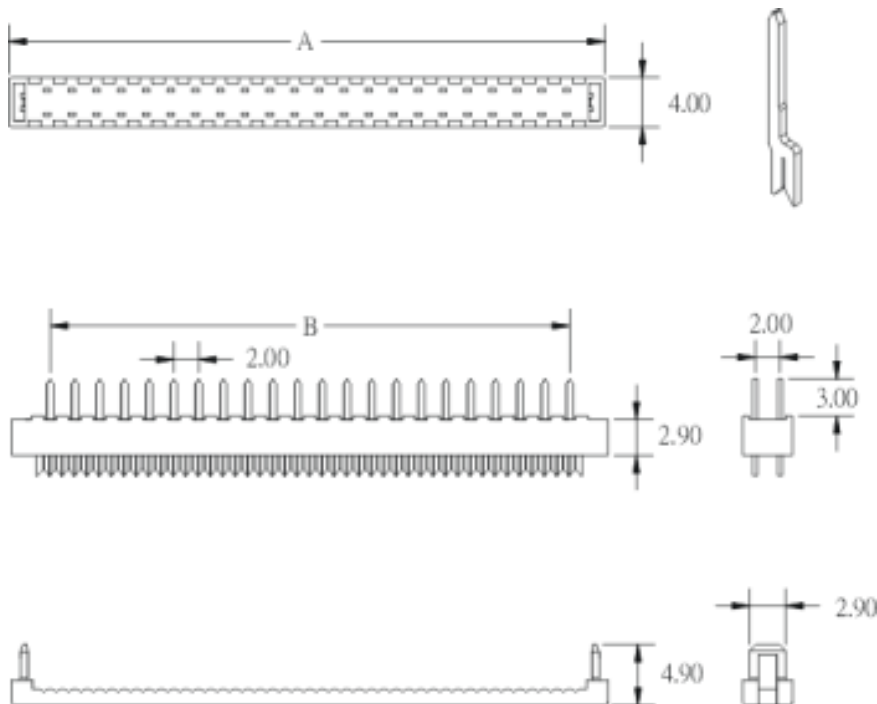

POSITION	A	B
10	15.20	8.00
12	17.20	10.00
14	19.20	12.00
16	21.20	14.00
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
30	35.20	28.00
34	39.20	32.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
68	73.20	66.00

HOW TO ORDER:A11a - 1 - 2 - 3 - 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
10 12 14 16 20 22 24 26 30 34 40 44 50 68	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5 μ " INCH GOLD B: 10 μ " INCH GOLD C: 15 μ " INCH GOLD D: 30 μ " INCH GOLD	1. BLACK