

ANTENNA PRODUCTS

DATA SHEET

433MHz Ceramic Chip Antenna

Sep, 2005, V3

	Print date 05/09/07					
	Multilayer Ceramic Antenna for 433 MHz (small size)			CAN4313 129 200431B		15 th , Aug, 05
						30 th , Aug,05
						7 th , Sep,05
Dennis Liu spec.doc	C.T.Lee	7 th ,Sep, 05	Page 1	sheet 190-1		A4

**MULTILAYER CERAMIC ANTENNA (LINEAR POLARIZATION MODE)
FOR 400MHz~500MHz**

Product Specification¹

QUICK REFERENCE DATA



Working Frequency*	400~500MHz
Bandwidth	20 MHz (Min)
Gain	0.5 dBi (Max)
VSWR	3.0 max
Polarization	Linear
Azimuth	Omni-directional
Impedance	50Ω
Operating Temperature	-40~85 °C
Termination	Ni/Sn (Environmentally-Friendly Leadless)
Resistance to soldering heat	260°C, 10 sec.





Special Environmental Concerns- Green Products Design: The foil making process is using environmentally friendly aqueous solvent technology. Termination is lead free and packing materials can be re-cycled

1. APPLICATION


¹ All the technical data and information contained herein are subject to change without prior notice

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B		15 th , Aug, 05	
						30 th , Aug,05	
						7 th , Sep,05	
Dennis Liu spec.doc	C.T.Lee	7 th ,Sep, 05	Page 2	sheet 190-2		A4	

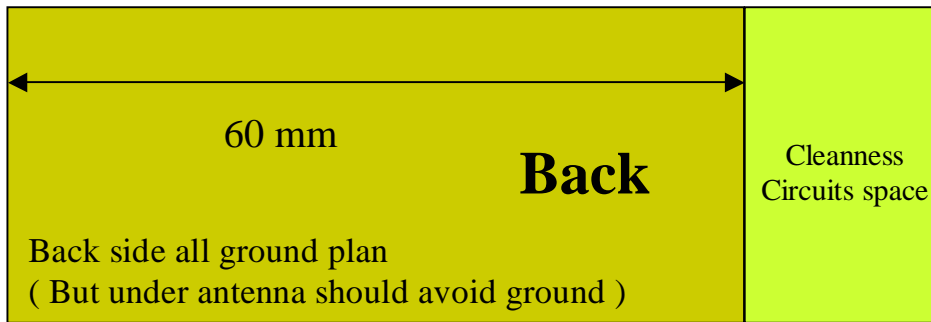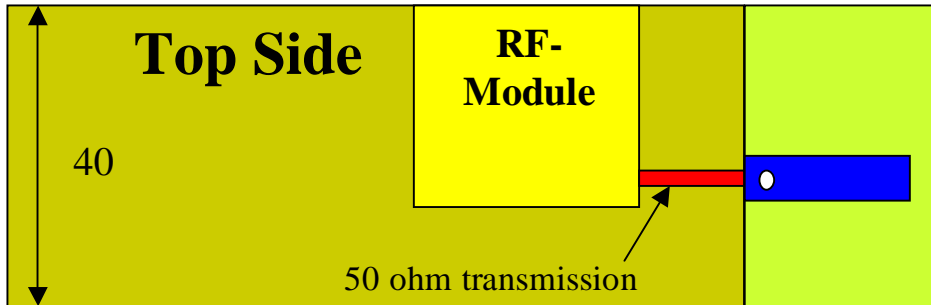

Print date 05/09/07						
Multilayer Ceramic Antenna for 433 MHz (small size)			CAN4313 129 200431B		15 th , Aug, 05	
					30 th , Aug, 05	
					7 th , Sep, 05	
Dennis Liu	C.T.Lee	7 th , Sep, 05	Page 3	sheet 190-3		A4
spec.doc						

2. SOLDER LAND PATTERN FOR ANTENNA

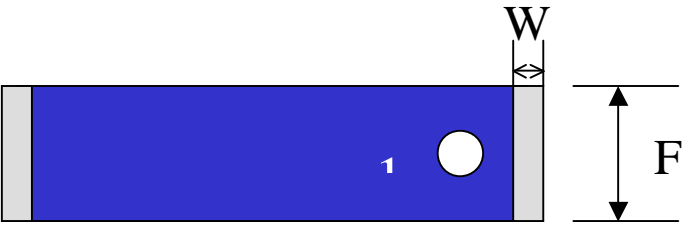
Figure	Dimensions		Remark
	w	0.85 ± 0.3 mm	Feed Pad
	F	4.20 ± 0.3 mm	Feed Pad

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B			15 th , Aug, 05
							30 th , Aug, 05
							7 th , Sep, 05
Dennis Liu spec.doc	C.T.Lee	7 th , Sep, 05	Page 4	sheet 190-4		A4	

3. MECHANICAL DATA

Figure	Dimension	Port
	W 4±0.5mm	Feed termination
	L 12±0.5mm	Solder termination
	T 1.5±0.3mm	

4. TEST BOARD DIMENSION FOR S11 (RETURN LOSS) AND RADIATION PATTERN MEASUREMENT

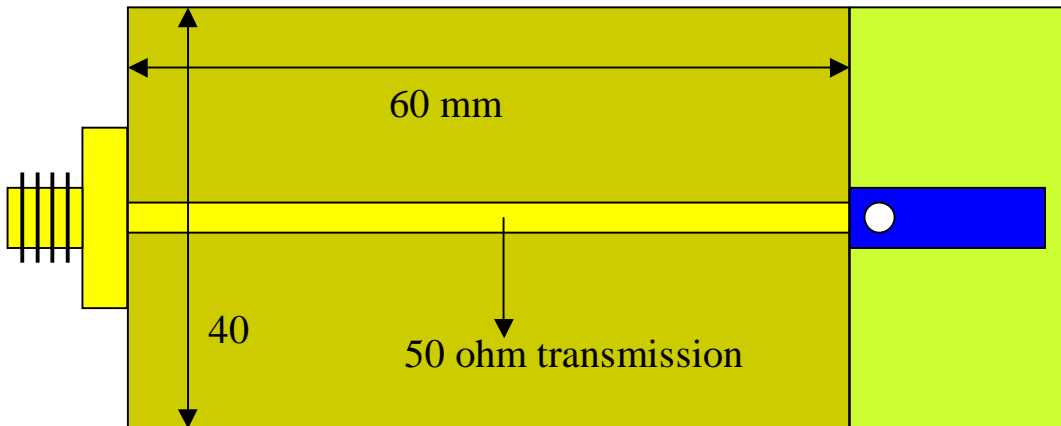


FR-4 PCB thickness = 0.8 mm

The length of transmission line = 60 mm (depends on PCB thickness)

	Print date 05/09/07					
	Multilayer Ceramic Antenna for 433 MHz (small size)		CAN4313 129 200431B		15 th , Aug, 05	
					30 th , Aug, 05	
					7 th , Sep, 05	
Dennis Liu spec.doc	C.T.Lee	7 th , Sep, 05	Page 5	sheet 190-5		A4

5. S11 RETURN LOSS

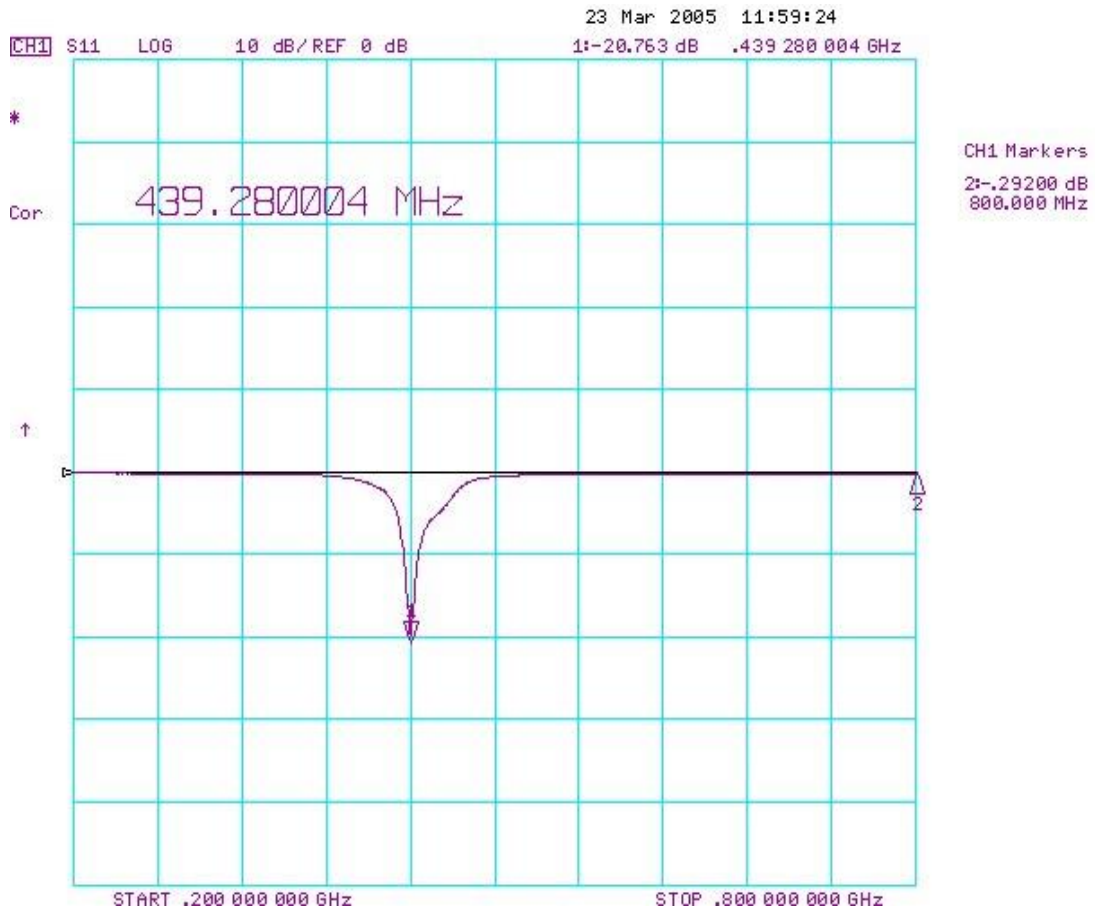

Print date 05/09/07						
Multilayer Ceramic Antenna for 433 MHz (small size)			CAN4313 129 200431B		15 th , Aug, 05	
					30 th , Aug, 05	
					7 th , Sep, 05	
Dennis Liu spec.doc	C.T.Lee	7 th , Sep, 05	Page 6	sheet 190-6	A4	

RELIABILITY DATA (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 6006868-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using $\times 10$ magnification	In accordance with specification (no chip off 3 mm)
4.6.1		Antenna	Central Frequency at 20 °C	Standard test board in page 4
4.8		Adhesion	A force of 5 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.25 mm at a rate of 1mm/s, radius jig. 340 mm, 1 mm warp on FR4 board of 90 mm length	No visible damage

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B		15 th , Aug, 05	
						30 th , Aug,05	
						7 th , Sep,05	
Dennis Liu	C.T.Lee	7 th ,Sep, 05	Page 7	sheet 190-7		A4	
spec.doc							

IEC 384-10/ CECC 32 100 CLAUSE	IEC 6006868-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.10	Tb	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change ± 6%
		Resistance to leaching	260 ± 5 °C for 30 ± 1 s in a static solder bath	Using visual enlargement of × 10, dissolution of the termination shall not exceed 10%
4.11	Ta	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in 235 ± 5°C.	The termination must be well tinned, at least 75% is well tinned at termination

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B		15 th , Aug. 05	
						30 th , Aug.05	
						7 th , Sep,05	
Dennis Liu	C.T.Lee	7 th ,Sep, 05	Page 8	sheet 190-8		A4	
spec.doc							

ORDERING INFORMATION:

The antenna may be ordered by using the ordering code. These code numbers can be determined by the following rules:

CAN43 13 1 29 20 043 1B
 F C M S T A T

F. Family Code
CAN43 = Antenna

C. Packing Type Code
13 = Bulk

M. Materials Code
1 = High Frequency Material

S. Size Code
29 = 12* 4 * 1.5 mm

T. Tolerance
20 = 20M Hz Band Width

A. Working Frequency
043 = 400~500MHz

CAN4311129200431B (Clear Text Code Example)							
CAN43	13	1	29	20	043	1	B
Product	Packing type	Material	Size	Type	Working Frequency	Quantities	Packing
CAN43= Antenna	Bulk	LTCC material	29=12*4mm	20= 20MHz	043=433MHz	1= 1K pcs	Bulking packing

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B		15 th , Aug. 05	
						30 th , Aug.05	
						7 th , Sep,05	
Dennis Liu	C.T.Lee	7 th ,Sep, 05	Page 9	sheet 190-9		A4	
spec.doc							

Revision Control:

Revision	Date	Content	Remark
1	15 th , Aug. 2005	New Issued	
2	30 th , Aug. 2005	Modification of end-termination's appearance	
3	7 th , Sep. 2005	Modification of 12nc and packing type	

Print date 05/09/07							
Multilayer Ceramic Antenna for 433 MHz (small size)				CAN4313 129 200431B		15 th , Aug. 05	
						30 th , Aug,05	
						7 th , Sep,05	
Dennis Liu	C.T.Lee	7 th ,Sep, 05	Page 10	sheet 190-10		A4	
spec.doc							