


LAYOUT DIMENSIONS (after plating)  
CONNECTOR SIDE VIEW

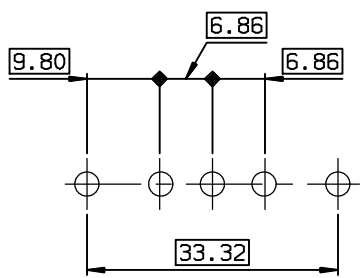

DA03W3S93C8G40	DA03W3S93C8G40LF	UNC 4.40
DA03W3S93C7G40	DA03W3S93C7G40LF	UNC 4.40
DA03W3S93C6G40	DA03W3S93C6G40LF	UNC 4.40
DA03W3S93C5G40	DA03W3S93C5G40LF	UNC 4.40
DAL3W3S93C8G40	DAL3W3S93C8G40LF	M3
DAL3W3S93C7G40	DAL3W3S93C7G40LF	M3
DAL3W3S93C6G40	DAL3W3S93C6G40LF	M3
DAL3W3S93C5G40	DAL3W3S93C5G40LF	M3
TIN-LEAD P/N	LEAD-FREE P/N	Threaded A

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8639-0002

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	JOUBERT	1998/03/16	ANGULAR	0.x ±0.1
Eng	PESSON	1998/03/16	LINEAR	0.xx ±0.1
Chr	LEGARE	1998/03/16	0.xx* ±2*	0.xxx ±0.1
Appr	LEGARE	1998/03/16	Product family	D-SUB
		D-SUB		Spec ref -
title SOCKET CONNECTOR 3W3			cat no C01-8639-1572	Rev. D
STR A POWER P-F			CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
B	-	SBA	2003/11/18
C	LS05-0056	MPE	2005/06/20
D	LS06-0097	LGO	2006/07/29
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.