REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

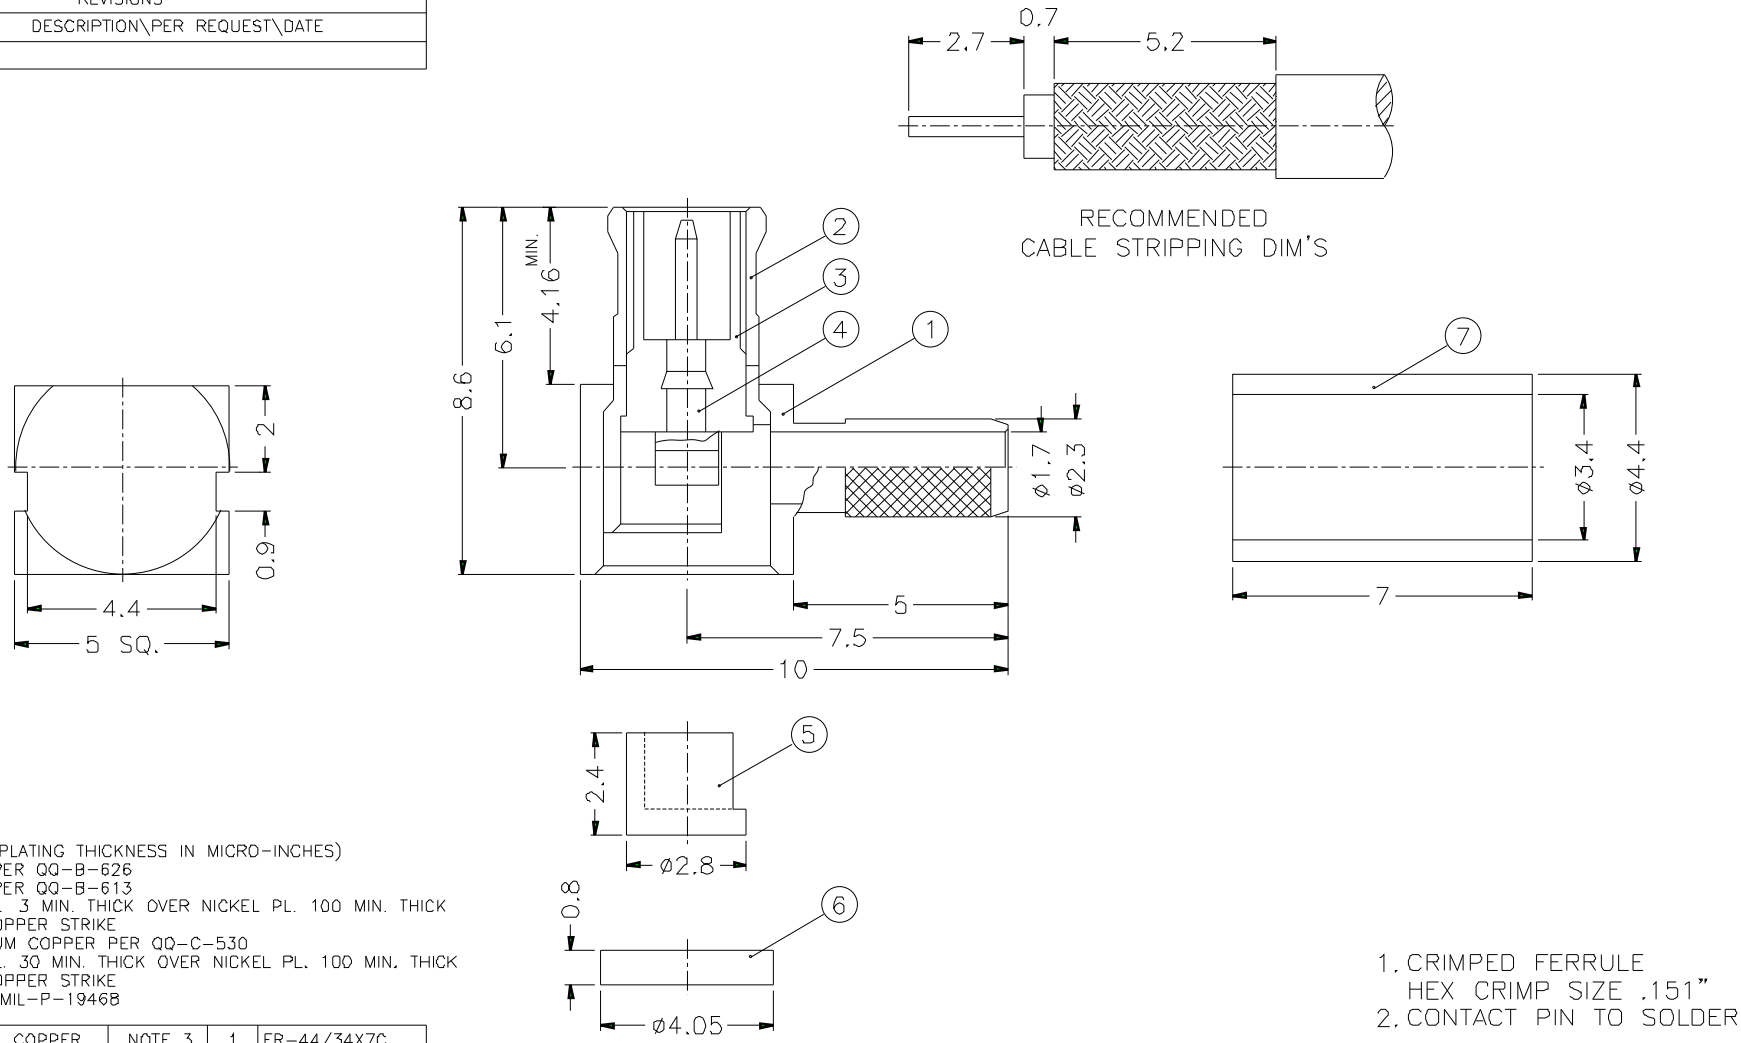

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. GOLD PL 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. BERYLLIUM COPPER PER QQ-C-530
5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	FERRULE	COPPER	NOTE 3	1	FR-44/34X7C
6	COVER	NOTE 2	NOTE 3	1	CV-405X08-T
5	INSULATOR	DELRIN	NATURAL	1	MCX1112A1-5
4	CONTACT PIN	NOTE 1	NOTE 5	1	MCX1112A1-4
3	INSULATOR	NOTE 6	NATURAL	1	MCX1112A1-3T-50-B
2	BODY	NOTE 4	NOTE 3	1	MCX1112A1-2-D
1	HOUSING	NOTE 1	NOTE 3	1	MCX1112A1-1-23/17-D

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 6/1 ISSUE A

PART NO. MCX1112A1-3GT30G-5A-50

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

Amphenol

TITLE MCX R/A CRIMP PLUG

DRAWING NO. KJ-MCX1112A1-3GT30G-316U/D-50

ITEM NO.