


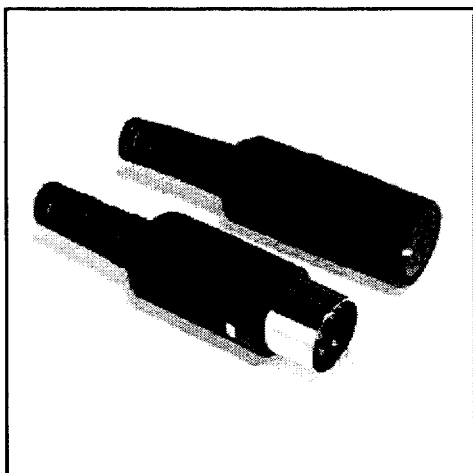

Standard DIN 4030-[*][**]

*Number of contacts;
Options are: 3, 4, 5, 6, 7, 8
** Gender; Options are:
M = male
F = female

MATERIALS:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Pin = Brass, Socket = Phosphor bronze
- Plating: Tin
- Operating temperature: -55°C to +105°C
- Metal shell: Nickel plated
- Cover: ABS
- Strain relief cap: PVC
- Color: Black


ELECTRICAL:

- Current rating: 1 AMP maximum
- Insulation resistance: 100 Megohms minimum
- Dielectric withstanding voltage: 500 VAC
- Contact resistance: 20 milliohms maximum

FEATURES:


- Snap together design
- Quick easy assembly
- Signal / power capability

4030 Male

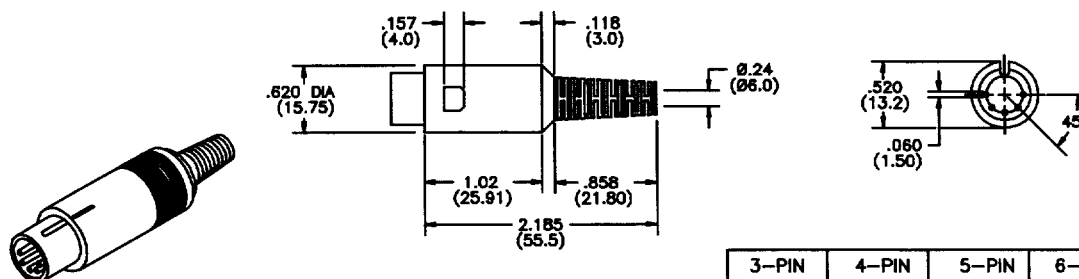

3-PIN 180°	4-PIN 210°	5-PIN 180°	6-PIN 240°	7-PIN 270°	8-PIN 270°

4030 Female

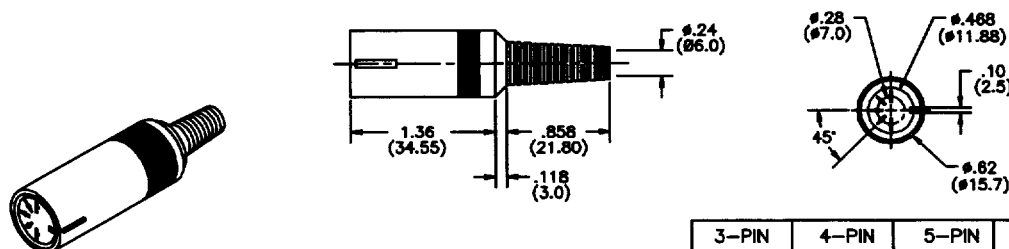

3-PIN 180°	4-PIN 210°	5-PIN 180°	6-PIN 240°	7-PIN 270°	8-PIN 270°