



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BAV300 THRU BAV303

Switching Diodes


Features

- Saving Space
- Silicon Epitaxial Planar Diodes
- Hermetic Sealed Parts
- Fits onto SOD-323/SOT-23 footprints
- Electrical data identical with the devices BAV100...BAV103
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

Continuous Reverse Voltage	BAV300 BAV301 BAV302 BAV303	V_R	50V 100V 150V 200V	$T_A=25^\circ\text{C}$
Repetitive Peak Reverse Voltage	BAV300 BAV301 BAV302 BAV303	V_{RRM}	60V 120V 200V 250V	$T_A=25^\circ\text{C}$
Forward DC Current		I_F	250mA	$T_A=25^\circ\text{C}$
Repetitive Peak Forward Current		I_{FRM}	625mA	$f=50\text{Hz}, T_A=25^\circ\text{C}$
Surge Forward Current		I_{FSM}	1.0A	$T_P=1\text{s}, T_J=25^\circ\text{C}$
Thermal Resistance Junction to Ambient		R_{thJA}	500K/W	Note 2
Junction temperature		T_j	175°C	
Storage temperature Range		T_{stg}	-65 to + 175°C	

MICROMELF

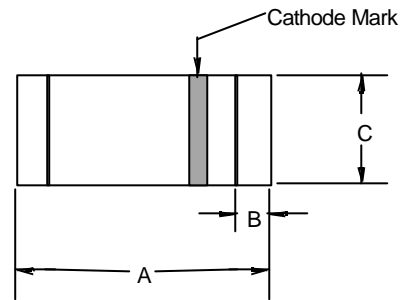


DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.071	.079	1.8	2.0	
B	.004	.008	.10	.20	
C	.047	.051	1.20	1.30	∅

Electrical Characteristics @ 25°C Unless Otherwise Specified

Maximum Forward Voltage	V_F	1.00V	$I_F = 100\text{mA}, T_A=25^\circ\text{C}$
Maximum Leakage current	I_R	100nA 15 μ A 100nA 15 μ A 100nA 15 μ A 100nA 15 μ A 100nA 15 μ A	$V_R=50\text{V}, T_j=100^\circ\text{C}$ $V_R=100\text{V}, T_j=100^\circ\text{C}$ $V_R=150\text{V}, T_j=100^\circ\text{C}$ $V_R=200\text{V}, T_j=100^\circ\text{C}$
Maximum Leakage current	$V_{(BR)}$	60V 120V 200V 250V	$I_R=100 \mu\text{A}, t_P/T=0.01, t_P=0.3\text{ms}$
Diode Capacitance	C_D	1.5pF	$V_R=0\text{V}, f=1.0\text{MHz}$
Maximum Reverse recovery time	t_{rr}	50ns	$I_F=10\text{mA}, I_R=30\text{mA}$ $I_{rr}=3.0\text{mA}, R_L=100\Omega$
Differential Forward Resistance	r_F	5.0 Ω	$I_F=10\text{mA}$

SUGGESTED SOLDER PAD LAYOUT

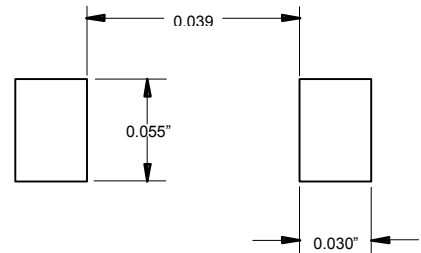

Notes: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.
2. mounted on epoxy-glass hard tissue, Fig.4 35 μ m copper clad, 0.9 mm² copper area per electrode

BAV300 THRU BAV303



Micro Commercial Components

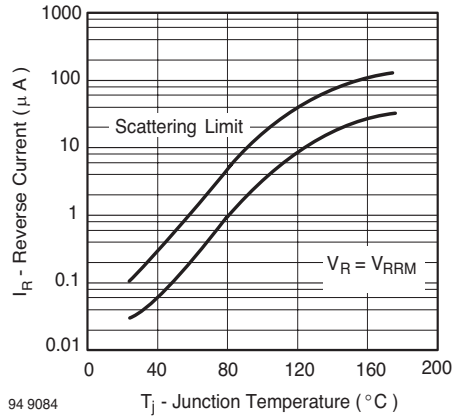


Fig. 1 Reverse Current vs. Junction Temperature

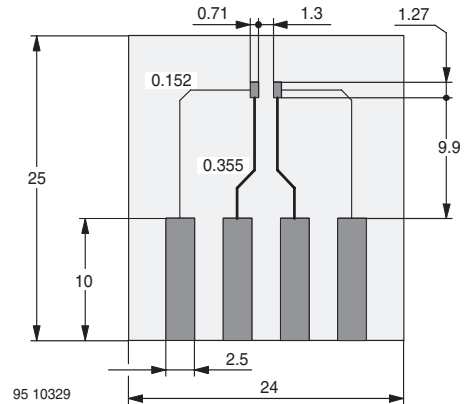


Fig. 4 Board for R_{thJA} definition (in mm)

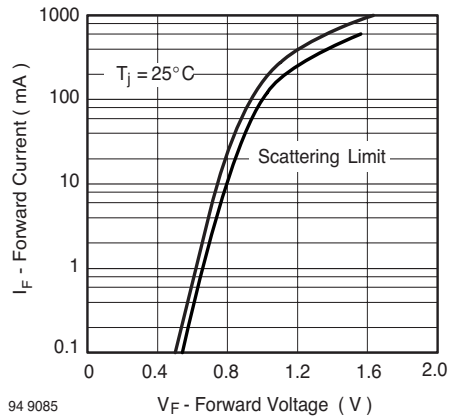


Fig. 2 Forward Current vs. Forward Voltage

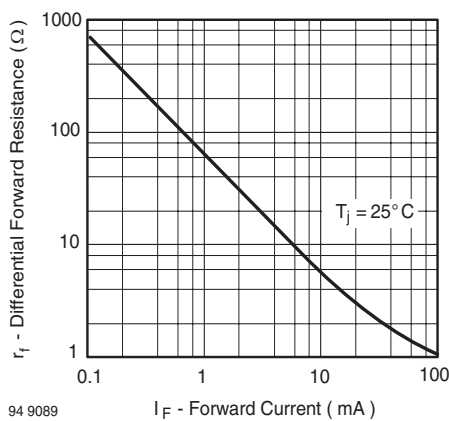


Fig. 3 Differential Forward Resistance vs. Forward Current



TM

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com