

SPECIFICATIONS

D-SUB Connector

Mechanical


Mating Force: 3.1kg (6.8Lb) max.
Unmating Force: 0.2kg (0.4Lb) min.
Contact Retention Force: 1.82kg (4.0Lb) min.

Electrical



Current Rating: 2.0A
Contact Resistance: 35mΩ max.
Dielectric Withstanding Voltage: 1000V AC/1min min.
Insulation Resistance: 5000MΩ

Physical



Housing: Thermoplastic, UL 94V-0 rated in Teal 322C Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Solder Pad: Copper alloy
Operating Temperature: -55°C to +105°C

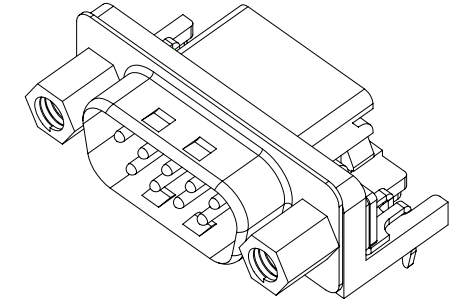

DRAWING

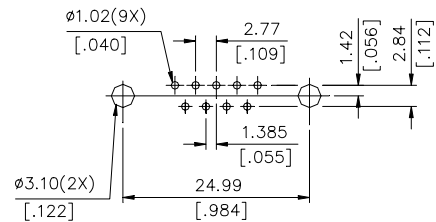

RECOMMENDED P.C.B. LAYOUT

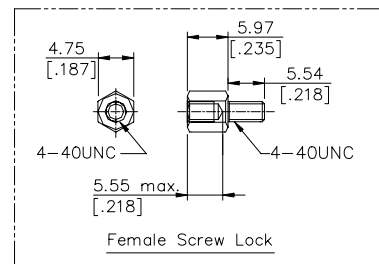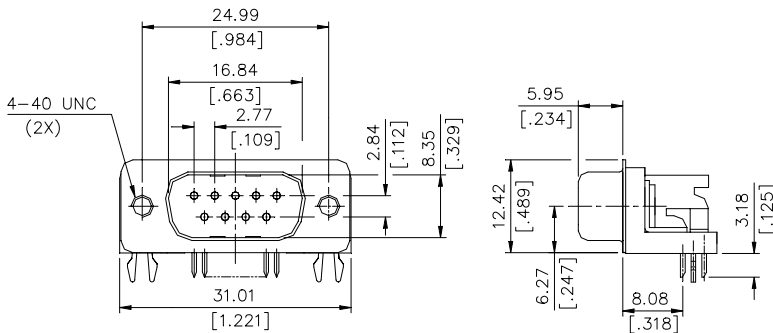

ORDERING INFORMATION

PRODUCT NO.: DT 1 0 1 2 *- HW*- 4F

