



Data Display Products®

.250" SNAP-IN PANEL LIGHT T-1¾ Medium Profile, Built-In Resistor

- Mounting Diameter .249"(6.32) to .252"(6.40)
- For Panels .031"(.79) to .125" (3.18) Thick
- For Detailed LED Data, See Discrete Section, MODEL 19

Model	Wires	LED						Voltage (Ta = 25°C) ^[2]		
			Color	λpk (nm)	Iv ^[1] (mcd)	Tint ^[3]	Viewing Angle(°)	Design Vf/I _f	Max Vf/I _f	
PR407	W Optional	-SR	RED	655	2	D	60	5H	5V/27mA	5.5V/40mA
		-LR	RED	635	12	D	60	12H	12V/27mA	14V/35mA
		-LCR	RED	635	34	C	34	15H	15/24mA	16.5V/28mA
		-LA	AMB	585	7	D	60	24H	24V/17mA	26V/20mA
		-LCA	AMB	585	38	C	34	28H	28V/16.5mA	30V/18mA
		-LG	GRN	565	12	D	60			
		-LCG	GRN	565	38	C	34			

[1] Iv = typical luminous intensity @ If = 20mA (Ta=25°C).

[2] Voltages 5H through 28H are VDC. For AC operation, insert D after Voltage (e.g. 24HD).
D indicates built-in rectifier: not required for 15VAC or less.

[3] D = Diffused, C = Clear Tinted.


To Order:

Select one **BOLD** component from each SHADED column in the table.


Example:

Part Number PR407W-LCG12H:

Model	Wires	LED	Voltage
PR407	W	-LCG	12H

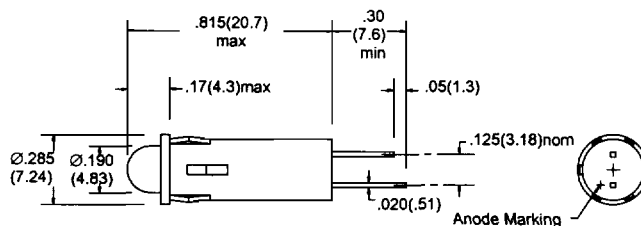

PR407

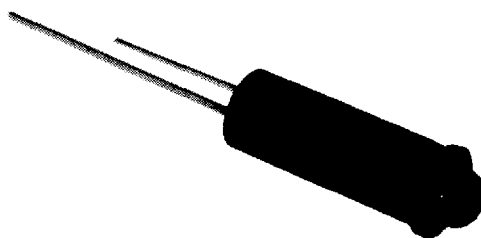

Standard Wire Leads: 6.0" total length (nominal) / .50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches(mm)
Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx) ±.010"(.25)
Specifications are subject to change without notice.