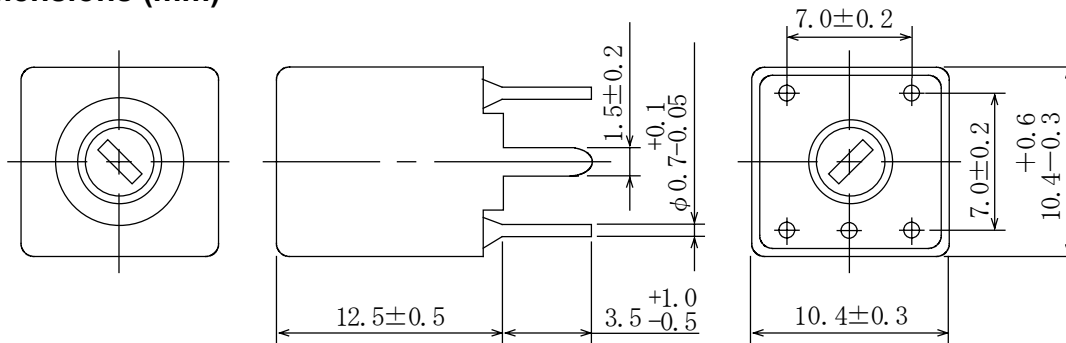


Type: S-10E
◆ Product Description


- 11.0 × 10.7mm Max.(L × W), 13.0mm Max. Height.
- Inductance: 30μH Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

Feature

- Variable shielded type.
- Internally assembled condenser is available.
- RoHS Compliance

◆ Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)


“S” is winding start

◆ Specification (Part No.0215-T017)

Item	(1-3)	Measuring Conditions
Tuning frequency	24MHz±3% Variable	
Unloaded Qu	50Min.	24MHz
Capacitor (Int.)	56pF±10%	
Ext. stray capacitor 6 pF between (1-3) at measuring.		