


| | | |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

GSD

1204-20-9

| REVISIONS | |
|-----------|--------------------------|
| ISSUE | CHANGES |
| 0 | ER 39276 HVN 06/09/05 |

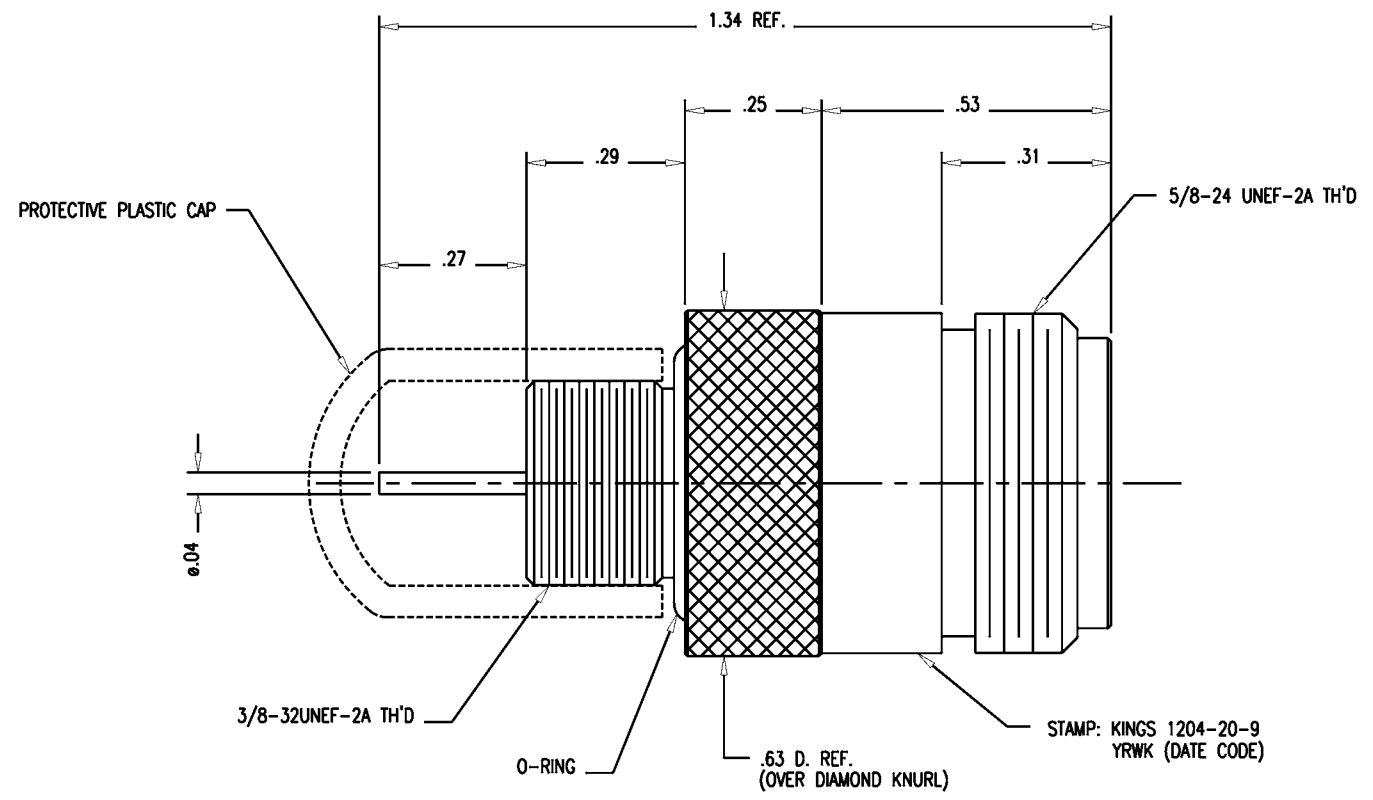

- NOTES:
- INTERFACES PER MIL-STD-348, FIG. 304-2.
 - MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
O-RING: ETHYLENE PROPYLENE
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B16
 - FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR5)
 - ELECTRIAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 11 GHZ
WORKING VOLTAGE: 500 VRMS

1204-20-9S

| | |
|---------------------|---------------|
| SCALE 4:1 | |
| APPROX SURFACE AREA | |
| USED ON | |
| REF: | |
| N, JACK RECEPTACLE | |
| DRAWN HVN | DATE 03/10/05 |
| DESIGN HVN | DATE 03/10/05 |
| APPR. | DATE |

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

GSD

1204-20-9