



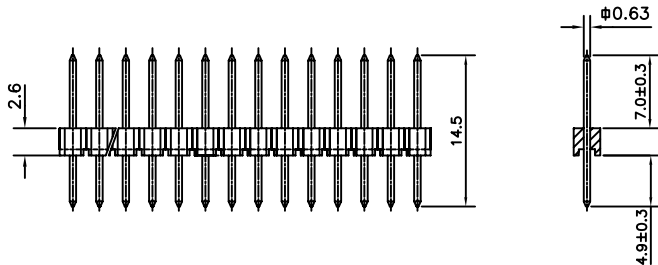



FCIconnect.com

Copyright FCI

SINGLE ROW (1 YO)

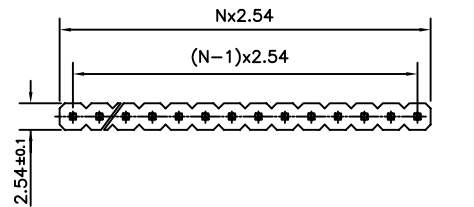

DOUBLE ROW (2 YO)

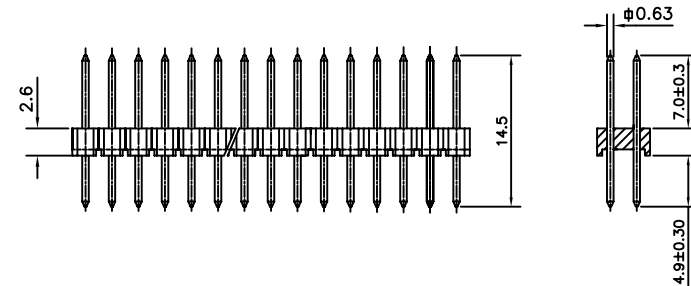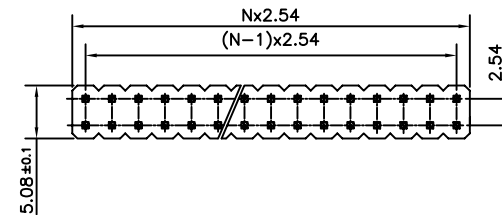

ORDERING INFORMATION

8614-00-XX-X-YO-X-718-XX

LF :-LEAD FREE

SPECIAL CODES

SERIES

OPEN MALE HEADER

NO: OF CONTACTS

1 - SINGLE ROW (1-36)
2 - DOUBLE ROW (2-72)

YO - STRAIGHT SOLDER

PLATING

- 1 - TIN LEAD
- 2 - 0.2μ Au
- 3 - 0.75μ Au SELECTIVE
- 4 - 0.2μ Au SELECTIVE
- 5 - 1.27μ Au SELECTIVE
- 6 - 0.75μ Au
- 7 - GOLD FLASH SELECTIVE
- 8 - 1.27μ Au
- 9 - 0.4μ Au SELECTIVE
- 10 - FULL GOLD FLASH

NOTES :

- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

TECHNICAL SPECIFICATION

INSULATOR MATERIAL : SELF EXTINGUISHING THERMOPLASTIC (UL94 V0)
CONTACT MATERIAL : COPPER ALLOY
MAXIMUM VOLTAGE : 1000 V rms.
NOMINAL CURRENT : 3A AT 20°C
INSULATION RESISTANCE : $\geq 5000 \text{ M } \Omega$
CONTACT RESISTANCE : $\leq 20 \text{ m } \Omega$
CLIMATIC CATAGORY : -55°C TO +125°C / 21 DAYS EXPOSURE TO-
INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

mat'l. code REF TECH SPEC				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family 8614		
ltr	ecn no	dr	date	tolerances unless	otherwise specified		title OPEN HEADER (STRAIGHT SOLDER)		
A	107-0160	MINI	2007-11-20	angles	linear	0°±1°	MM		
							scale -		
		dr	ALEX BABU	2007-11-20			dwg no		
		enr	ALEX BABU	2007-11-20			sheet 1 of 1		
		chr	ALEX BABU	2007-11-20			size		
		appd	BIJU K PAUL	2007-11-20			A3		
sheet index		revision	A				type Product Customer Drawing		
	sheet	1							