


SURFACE MOUNT TCXO

DFA S4-KHZ (5 V) & DFA S4-LHZ (3.3 V)

KEY FEATURES	
5 to 52 MHz	
Tight stability	
Analogue temperature compensation	
APPLICATIONS	
SDH/Sonet/Microwave	

Function	DFA S4
NC	1
E/D	2
Vcc	3
Output	4
GND	5

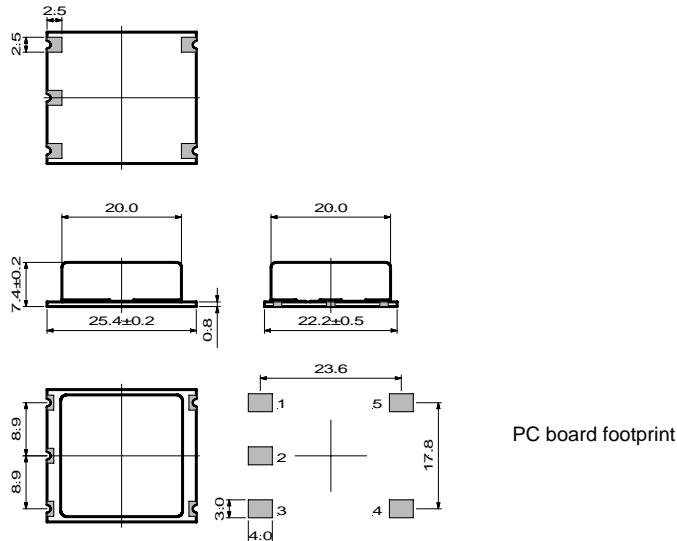

TYPE	DFA S4-KHZ	DFA S4-LHZ
Frequency Range	5 to 52 MHz	

ELECTRICAL SPECIFICATIONS					
supply voltage		5 V ± 5 %			
supply current (no load)		≤ 20 mA			
output load		HCMOS 15 pF or 2 TTL			
duty cycle @ 50% level rise/fall times (10 to 90 %) high/low levels or output amplitude		45/55...55/45 % ≤ 5 ns ≥ 4.5 V / ≤ 0.5 V			
start-up		≤ 10 ms @ 4.75 V			
tri-state control on pin 2		high or open = enable, low = high Z			
		high or open = enable, low = high Z			

FREQUENCY STABILITY			detailed tolerances [ppm]					
type	temperature range	model code	temperature	stability versus:	Vcc ± 5 %	load ± 10 %	ageing	calibration @ 25°C
all types	0 to 70°C	B0.5	≤ ± 0.5	≤ ± 0.1	≤ ± 0.1	≤ ± 1	≤ ± 1	≤ ± 1
	-20 to 70°C	C0.5	≤ ± 0.5					
	-40 to 85°C	E0.5	≤ ± 0.5					
	-40 to 85°C	E1	≤ ± 1.0					
remark			ageing is 1 st year at 25°C					

OPTIONS	CODE		
voltage control on pin 1 (positive slope)	V	≥ ± 5 ppm, ≤ ± 15 ppm 2.5 V ± 2 V	≥ ± 5 ppm, ≤ ± 15 ppm 1.65 V ± 1.35 V

ORDERING CODE	type + option code + frequency + model code
Example	DFA S4-KHZV 19.44 MHz E0.5