




**Fig. 1**

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes.
- Series 712 uses MM #0255 pins. See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

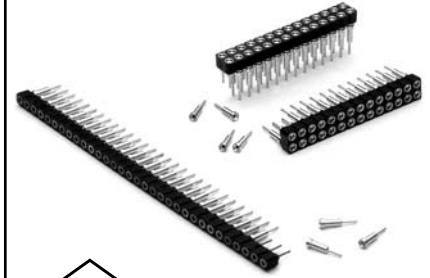

**Ordering Information**

|               |   |
|---------------|---|
| <b>Fig. 1</b> | <b>Single Row (0,71 OR 1,4 min. mounting holes)</b> |
|               | 712-XX-1__-41-001000<br>Specify # of pins → 01-64   |
| <b>Fig. 2</b> | <b>Double Row (0,71 OR 1,4 min. mounting holes)</b> |
|               | 712-XX-2__-41-001000<br>Specify # of pins → 02-64   |



**Fig. 2**

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

|                          |           |              |           |
|--------------------------|-----------|--------------|-----------|
| SPECIFY PLATING CODE XX= | 13◇       | 93           | 43◇       |
| Sleeve (Pin)             | 0,25µm Au | 5,08µm Sn/Pb | 5,08µm Sn |
| Contact (Clip)           | 0,76µm Au | 0,76µm Au    | 0,76µm Au |