


SMART CARD CONNECTOR SCC SERIES

SPECIFICATIONS

Materials:

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze
Current Rating:
Testing Now!
Operating Temp Range:
-65°C to +125°C
Max Processing Temp:
230°C for 60 seconds
Plating:
Au or Sn over
50µ" (1,27µm) Ni
SMT Lead Coplanarity:
(0,10mm) .004" max

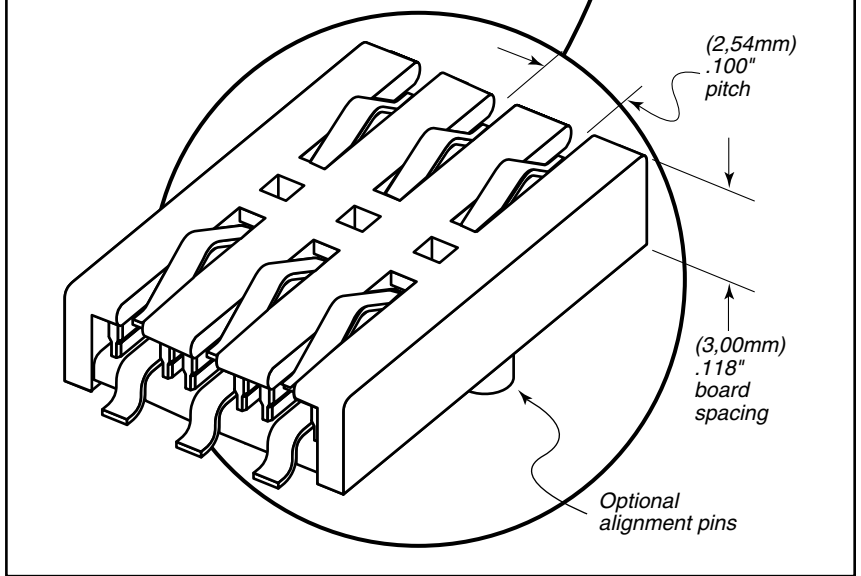

| | | | | | | | |
|------------|----------|---|-----------|-----------------------|---|---|---|
| SCC | 1 | NO. PINS PER ROW | 02 | PLATING OPTION | D | ALIGNMENT OPTION | OTHER OPTION |
| | | 03, 04, 05 | | | <p>-L = 10µ" (0,25µm) Gold on contact 100µ" (2,54µm) Tin on tail</p> <p>-S = 30µ" (0,76µm) Gold on contact 100µ" (2,54µm) Tin on tail</p> | <p>Leave blank for no Alignment Pin</p> <p>-AB = Alignment Pin Bottom Side</p> | <p>-TR = Tape & Reel Packaging</p> |
| | | <p>(No. of positions x (2,54) .100) + (1,37) .054</p> | | | | <p>-AB OPTION</p> | |

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM