

Surface
SMT
Mount

BOARD STACKER TW SERIES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TW

Insulator Material:
Black Liquid Crystal Polymer



Terminal Material:
Phosphor Bronze



Plating:
Sn or Au over 50µ" (1,27µm) Ni

Current Rating:
3A @ 80°C ambient

Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold

RoHS Compliant:
Yes

Processing:

Max Processing Temp:
230°C for 60 seconds, or
260°C for 20 seconds 3x



Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0,15mm) .006" max

Mates with:
CLT, SQT, SQW, ESQT,
TLE SMM, MMS, TCSD

APPLICATION SPECIFIC OPTIONS

End shrouds with or without guide posts available. Call Samtec for stacker height ranges and standard part numbers on double row.

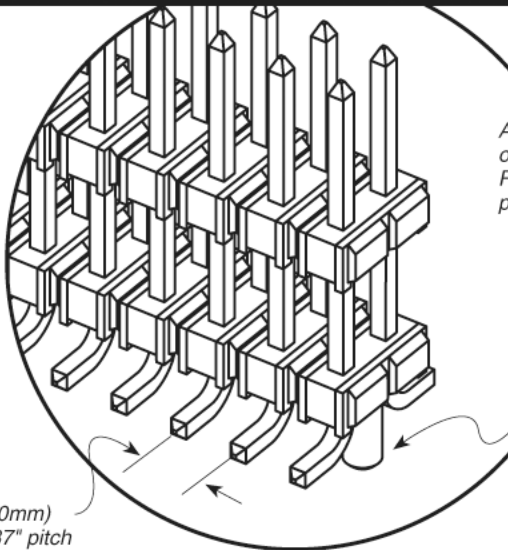

Available with optional Pick-and-Place pads

Available with optional Alignment Pins or Locking Clips

(2,00mm) .0787" pitch

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTIONS						
	02 thru 36	Specify LEAD STYLE from chart below.	-L = 10µ" (0,25µm) Gold post, Matte Tin on tail -G = 20µ" (0,51µm) Gold post, Gold flash on tail -T = Matte Tin -S = 30µ" (0,76µm) Gold post, Matte Tin on tail	-S = Single Row -D = Double Row	-"XXX" = Stacker Height In inches (0,13mm) .005" increments Example: -250 = (6,35mm) .250"		-"XXX" = Polarized Position -A = Alignment Pin (Metal or plastic at Samtec discretion) (4,83mm) .190" min. board space (-D only) -P = Pick & Place Pad (1,91mm) .075" min. post height (04-36 only) -TR = Tape & Reel Packaging (-07 lead style not available)						
				<table border="1"> <thead> <tr> <th>ROW OPTION</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>-S</td> <td>(5,08) .200</td> </tr> <tr> <td>-D</td> <td>(6,35) .250</td> </tr> </tbody> </table>	ROW OPTION	A	-S	(5,08) .200	-D	(6,35) .250			
ROW OPTION	A												
-S	(5,08) .200												
-D	(6,35) .250												

Note: This Series is non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502
 SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842
 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
 SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340
 SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432
 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
 SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745