

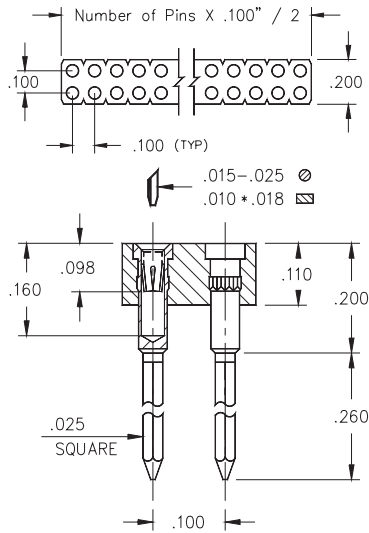


Fig. 1

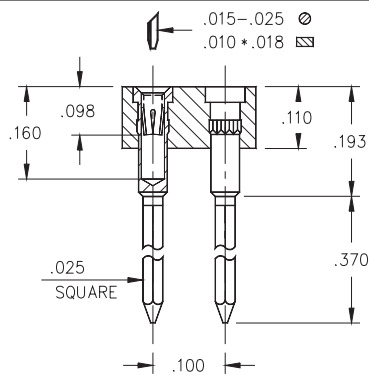


Fig. 2

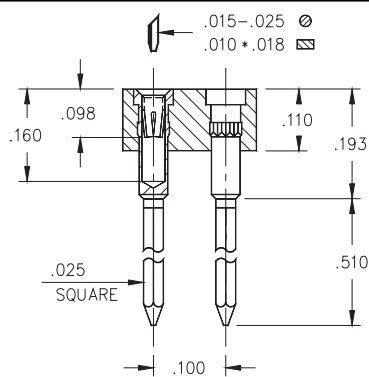


Fig. 3

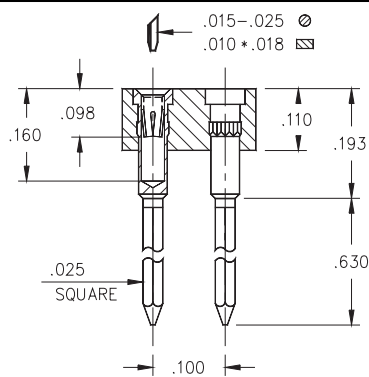


Fig. 4

- Wrapost double row strip sockets are available with one to four-level wraposts: M-M# 0040, 0089, 0088, or 0086 pins. See page 162 for details.
- Hi-Rel, 4-finger #30 BeCu contact is rated at 3 amps. See page 208 for details.



Ordering Information

Fig. 1

Series 421...001

1 Level Wrapost

421-XX-2_-41-001000

Specify # of pins

02-64

Fig. 2

Series 422...001

2 Level Wrapost

422-XX-2_-41-001000

Specify # of pins

02-64

Fig. 3

Series 423...001

3 Level Wrapost

423-XX-2_-41-001000

Specify # of pins

02-64

Fig. 4

Series 424...002

4 Level Wrapost

424-XX-2_-41-002000

Specify # of pins

02-64

**XX=Plating Code
See Below**

**RoHS
2002/95/EC**

**For RoHS compliance,
select $\diamond$ plating code.
For the all gold option
(XX=13) also change
part number from
42X-XX-2XX-41-00X000
to
42X-13-2XX-41-00X100**

SPECIFY PLATING CODE XX=	13 $\diamond$	93	43 $\diamond$
Sleeve (Pin)	10 μ " Au	200 μ " Sn/Pb	200 μ " Sn
Contact (Clip)	30 μ " Au	30 μ " Au	30 μ " Au