

PRODUCT NUMBER


71600-YXXLF

LEAD FREE, SEE NOTE 6

TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2


OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1
NOTE 5

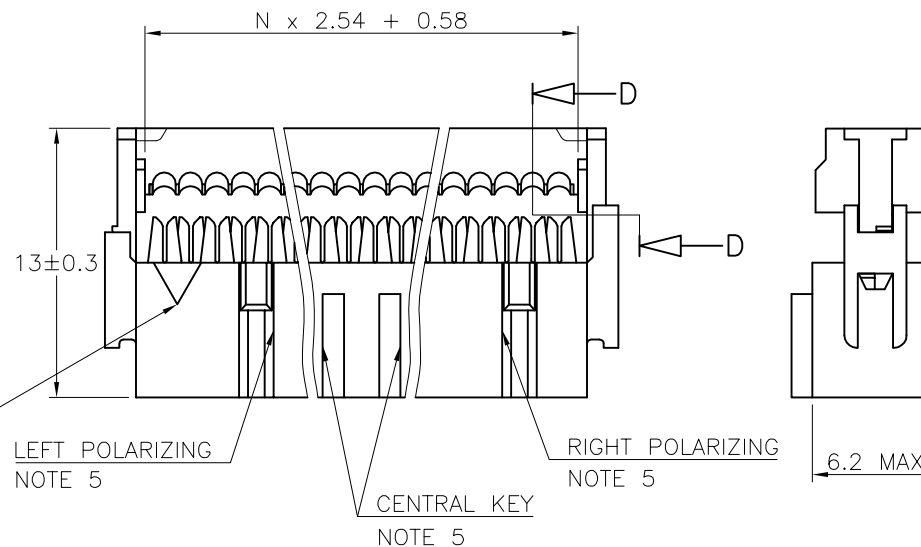


NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.
- 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.
- 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.
- 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT
- 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT
- 6 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.
PACKAGING SPECIFICATION AS PER GS-14-920.

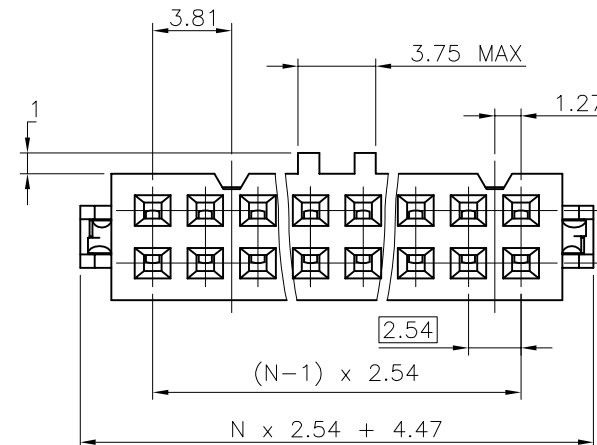

COVER ORIENTATION

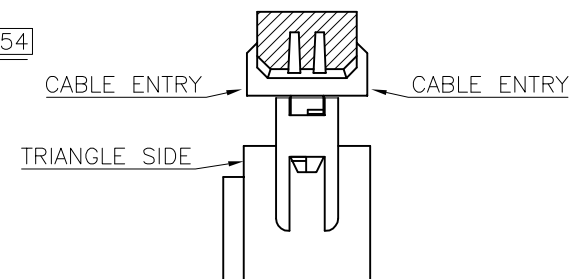

D D SECTION

mat'l. code SEE NOTES				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family 2.54MM IDC
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title
AG	F04-0330	LMU	04.09.01	angles	X.X ±0.3		QUICKIE III FEM
AH	F05-0109	JCO	05.01.17	linear	X.XX ±0.13	scale 5:1	0.76µm Au
AJ	F05-0171	LMU	05.04.07		X.XXX ±0.05		
AK	F05-0180	LMU	05.04.22	dr	D.LE 01.01.24	FCI	dwg no
AL	F06-0270	LMU	06.09.12	engr	P.NZ 01.01.24		71600
AM	F06-0274	LMU	06.09.25	chr	JF.N 01.01.24		sheet 1 of 2
AN	F09-0233	LMU	09.12.15	appd	P.NZ 01.01.24		A3
sheet index	revision sheet	AN	AE				type CUSTOMER Drawing

PDM: Rev:AN

STATUS:Released

Printed: Feb 20, 2010

CORE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	18
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT

CATALOGUE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	18
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


624

304


204 / 224

004


DASHES NOT
AVAILABLE




WITHOUT STRAIN RELIEF






WITH LOW PROFILE STRAIN RELIEF



WITH STANDARD STRAIN RELIEF



WITH LATCHING STRAIN RELIEF

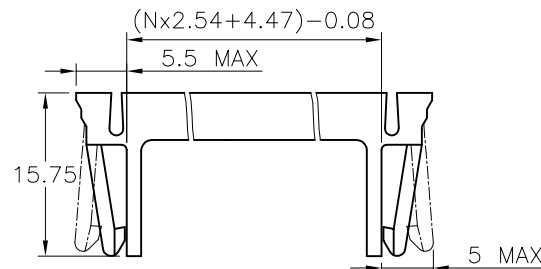LOW PROFILE
STRAIN RELIEFSTANDARD
STRAIN RELIEFLATCHING STRAIN RELIEF
FOR SLIM HEADER

71600-6YYLF	●					●
71600-3YYLF		●	●			
71600-2YYLF	●				●	
71600-1YYLF	●			●		
71600-0YYLF	●		●			
PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT	STANDARD	WITHOUT	LOW PROFILE	LATCHING
	CENTRAL KEY		STRAIN RELIEF			

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family QUICKIE
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title
X	F70666	AAN	97.11.05	angles	linear		IDC RECEPT
Y	F10121	DLE	01.01.24				DR
AA	F10199	GCO	01.04.26			scale N/A	
AB	F03019	DLE	03.01.23	dr	D.LE	01.01.24	dwg no
AC	F05-0180	LMU	05.04.22	engr	P.NZ	01.01.24	sheet 2 of - size
AD	F06-0270	LMU	06.09.12	chr	JF.N	01.01.24	71600 A3
AE	F06-0274	LMU	06.09.25	appd	P.NZ	01.01.24	type
sheet	revision						CUSTOMER Drawing
index	sheet						