



.100" (2.54mm) Dual Row, Through Hole, Right Angle, Low Profile Header

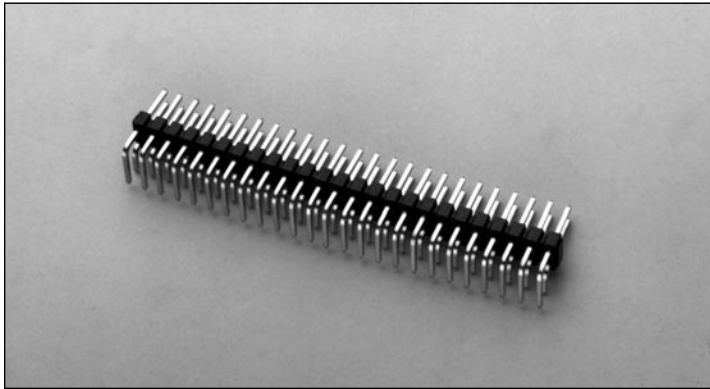





9100 SERIES ("POST/BOXE")

PART NUMBER LEGEND

91XX-4-2XX-XX

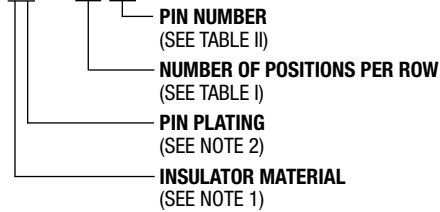

MATING CONNECTORS: 9000 SERIES

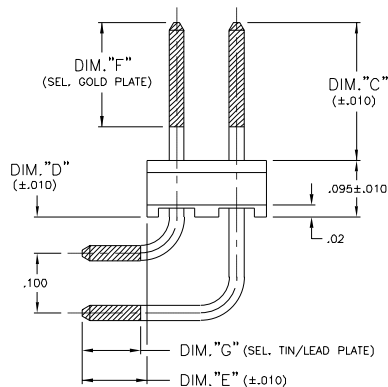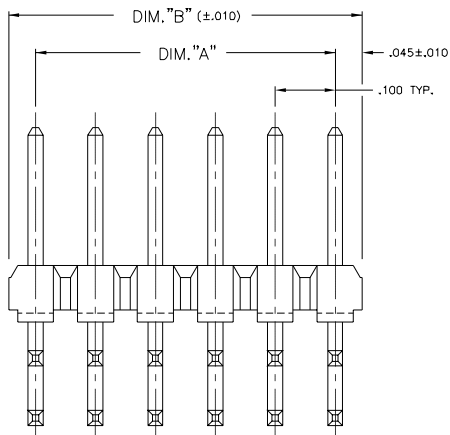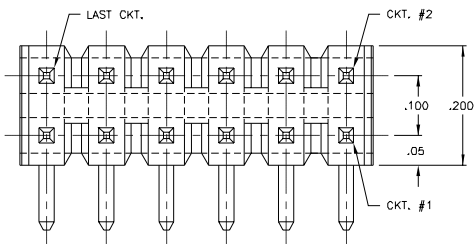

RECOMMENDED P.C. BOARD LAYOUT

NOTES:

- 1) MATERIALS: INSULATOR - 910X - GLASS FILLED POLYESTER (PET); UL 94V-0; COLOR: BLACK
911X - GLASS FILLED POLYESTER (PCT); UL 94V-0; COLOR: BLACK
PINS - PHOSPHOR BRONZE.
- 2) PIN FINISH: 910D - TIN/LEAD OVER NICKEL PLATE;
910Z - GOLD (.000015 THICK) OVER NICKEL PLATE (.000030 THICK);
910B - SEL. GOLD (.000030 THICK) AND SEL. 90/10 TIN/LEAD (.0001/.0002 THICK) WITH NICKEL UNDERPLATE OVERALL (.000050 THICK);
910F - SEL. GOLD (.000015 THICK) AND SEL. 90/10 TIN/LEAD (.0001/.0002 THICK) WITH NICKEL UNDERPLATE OVERALL (.000050 THICK);
- 3) PIN RETENTION: 2 LB. MINIMUM.

PART No.	DIM "C"	DIM "D"	DIM "E"	DIM "F"	DIM "G"
910X-4-2XX-01	.420	.090	.110	.200	.120
910X-4-2XX-02	.240	.065	.092	.200	.120
910X-4-2XX-03	.320	.097	.110	.200	.120
910X-4-2XX-04	.230	.060	.083	.200	.120
910X-4-2XX-05	.230	.060	.095	.165	.120

PART No.	No. OF POS.	DIM "A"	DIM "B"
910X-4-202-XX	4	.100	.190
↑ -203- ↓	6	.200	.290
↑ -204- ↓	8	.300	.390
↑ -205- ↓	10	.400	.490
↑ -206- ↓	12	.500	.590
↑ -207- ↓	14	.600	.690
↑ -208- ↓	16	.700	.790
↑ -209- ↓	18	.800	.890
↑ -210- ↓	20	.900	.990
↑ -211- ↓	22	1.000	1.090
↑ -212- ↓	24	1.100	1.190
↑ -213- ↓	26	1.200	1.290
↑ -214- ↓	28	1.300	1.390
↑ -215- ↓	30	1.400	1.490
↑ -216- ↓	32	1.500	1.590
↑ -217- ↓	34	1.600	1.690
↑ -218- ↓	36	1.700	1.790
↑ -219- ↓	38	1.800	1.890
↑ -220- ↓	40	1.900	1.990
↑ -221- ↓	42	2.000	2.090
↑ -222- ↓	44	2.100	2.190
↑ -223- ↓	46	2.200	2.290
↑ -224- ↓	48	2.300	2.390
↑ -225- ↓	50	2.400	2.490
↑ -226- ↓	52	2.500	2.590
↑ -227- ↓	54	2.600	2.690
↑ -228- ↓	56	2.700	2.790
↑ -229- ↓	58	2.800	2.890
↑ -230- ↓	60	2.900	2.990
↑ -231- ↓	62	3.000	3.090
↑ -232- ↓	64	3.100	3.190
↑ -233- ↓	66	3.200	3.290
↑ -234- ↓	68	3.300	3.390
↑ -235- ↓	70	3.400	3.490
↑ -236- ↓	72	3.500	3.590
↑ -237- ↓	74	3.600	3.690
↑ -238- ↓	76	3.700	3.790
↑ -239- ↓	78	3.800	3.890
↑ -240- ↓	80	3.900	3.990



North and South America:

Methode Electronics, Inc. Connector Products

1700 Hicks Road • Rolling Meadows, IL 60008 USA

847-392-3500 • Toll Free: 800-323-6864 • Fax: 847-392-9404

Email: info@methode.com • Web: www.methode.com/connector/index.html

Europe:

Methode Electronics Ireland, Ltd.

Unit H, Crossagalla Business Park, Ballysion Rd. • Limerick, Ireland

+353 (0) 61 401222 • Fax: +353 (0) 61 401942

Email: info@methode.ie • Web: ireland.methode.com/main.html

Far East:

Methode Electronics Far East, Pte. Ltd.

1 Tuas Lane, Jurong Town • Singapore 638610

65-68615444 • Fax: 65-68614777

Email: sales@methode.com.sg • Web: www.methode.com/mefe/index.html