


DO NOT SCALE FROM THIS PRINT

FIG. 1  
CBSE-060-01-X-D-LC SHOWN

CBSE-XXX-01-X-D-XX

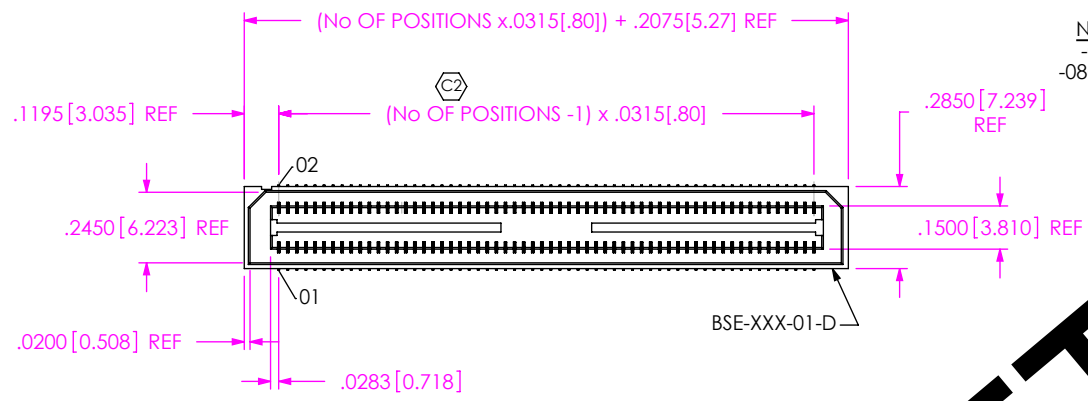




No OF POSITIONS  
-020, -040, -060,  
-080, -090, -100, -120  
(PER ROW)

OPTION  
-A: ALIGNMENT PINS  
(USE BSE-XXX-01-D-A)  
-LC: LOCKING CLIPS  
(USE LC-08-TM-01)

LEAD STYLE  
-01: .1280 [3.25]

ROW SPECIFICATION  
-D: DOUBLE (USE BSE-XXX-01-D-X)


PLATING SPECIFICATION  
-C: ELECTRO-POURED SELECTIVE  
(USE C-126-01-X)

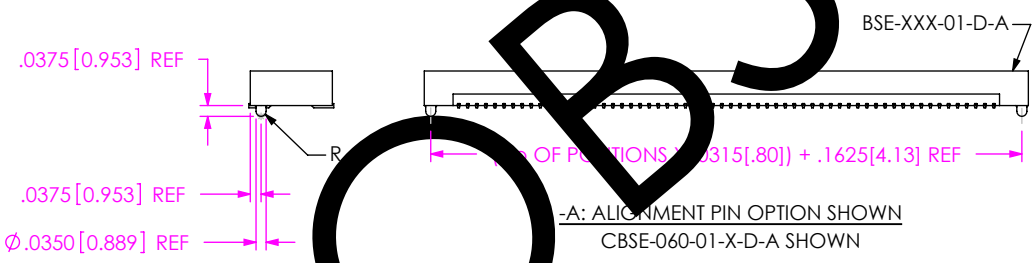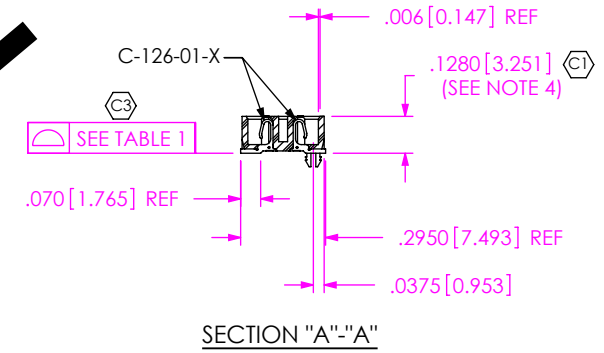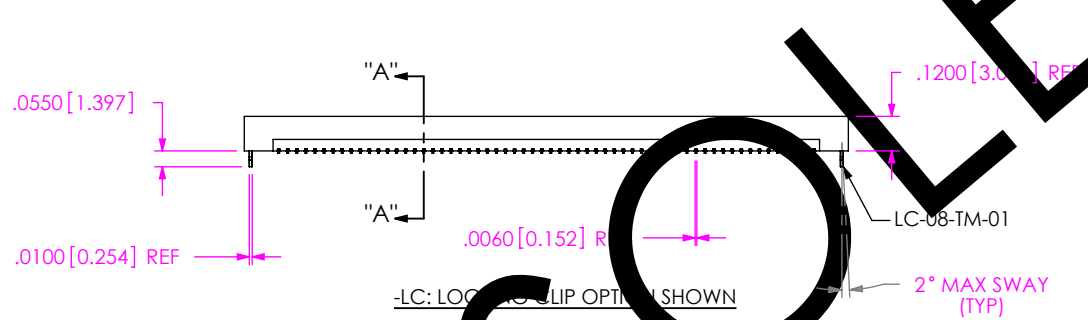

CBSE-060-01-X-D-A SHOWN

TABLE 1	
No OF POS	COPLANARITY
-020 THRU -080	.004[.10]
-90 THRU -120	.006[.15]

- NOTES:
1. © REPRESENTS A CRITICAL DIMENSION.
  2. BURR ALLOWANCE: .0015 [.04] MAX.
  3. MINIMUM PUSHOUT FORCE: .5 LB.
  4. MAX VARIANCE: .002 [.05]



UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES.  
TOLERANCES ARE:  
DECIMALS ANGLES  
.XX: ±.01 [.25]  
.XXX: ±.005 [.13]  
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE  
THIS DOCUMENT CONTAINS INFORMATION  
CONFIDENTIAL AND PROPRIETARY TO  
SAMTEC, INC. AND SHALL NOT BE REPRODUCED  
OR TRANSFERRED TO OTHER DOCUMENTS OR  
DISCLOSED TO OTHERS OR USED FOR ANY  
PURPOSE OTHER THAN THAT WHICH IT WAS  
OBTAINED WITHOUT THE EXPRESSED WRITTEN  
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 1.5:1  
INSULATOR: BLACK LCP  
SOCKET: PHOS BRONZE

520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:  
.8mm DOUBLE ROW SOCKET ASSEMBLY

DWG. NO. CBSE-XXX-01-X-D-XX

BY: B. PERRY 10/04/2007 SHEET 1 OF 1