


REVISION E

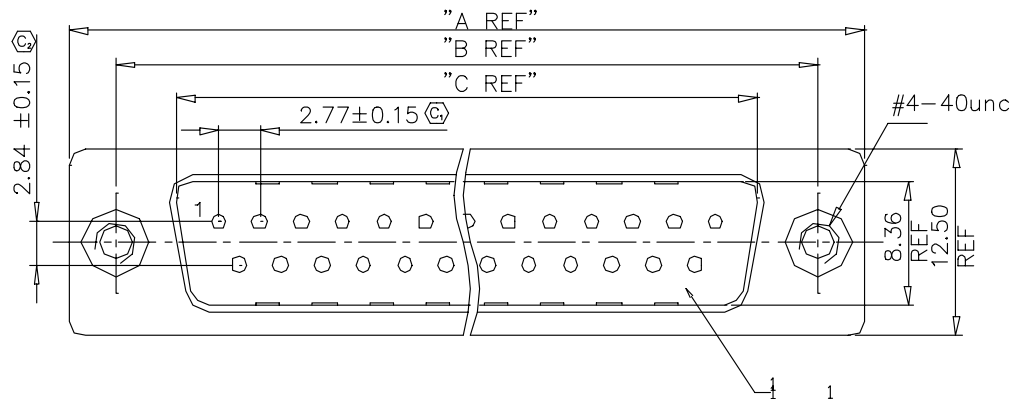

DO NOT SCALE FROM THIS PRINT

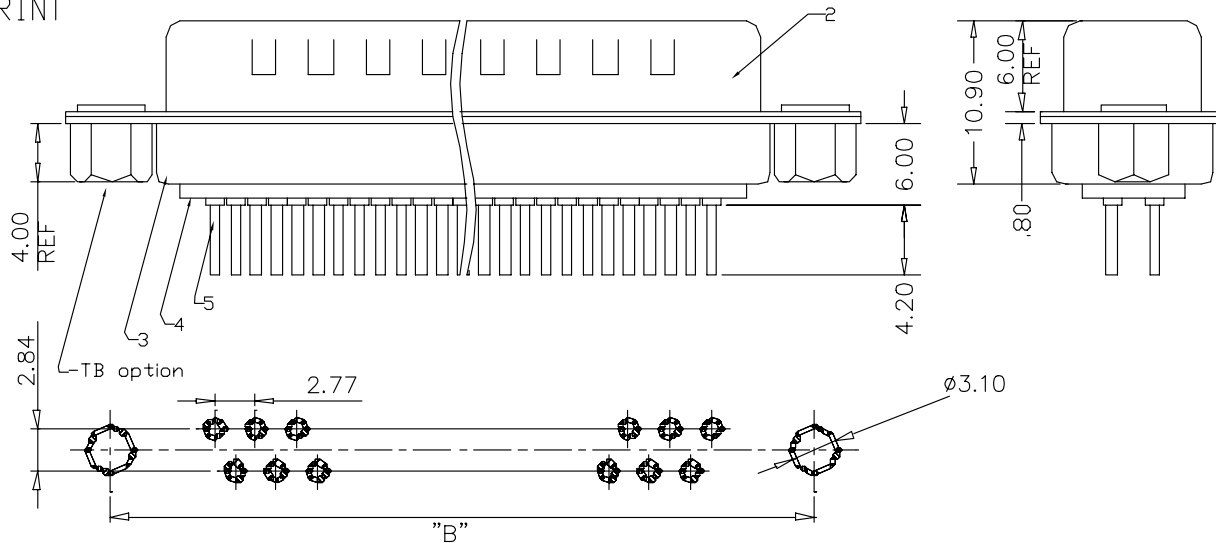


TABLE 2

1	DSMH-XX-P-F
2	DSMS-X-PX-N
3	DSMS-X-R-N
4	DSMH-XX-P-R
5	T-1M30-XX-X

PCB Layout
Top View

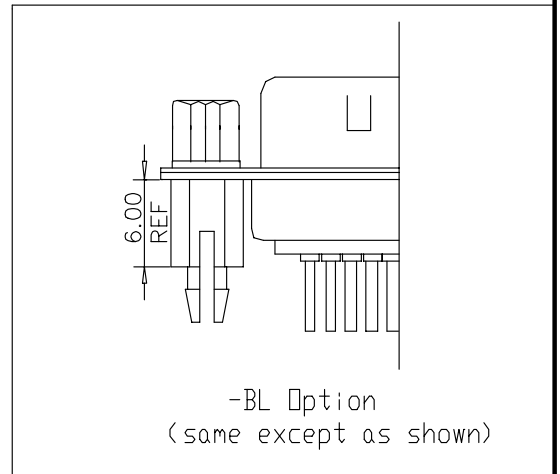


TABLE 1

Position	"A"	"B"	"C"
E-09	30.80	25.00	16.92
A-15	39.20	33.32	25.25
B-25	53.04	47.04	38.96
C-37	69.40	63.50	55.42

NOTES:
1. $\text{\textcircled{C}}$ REPRESENTS CRITICAL DIMENSION.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:

DECIMALS ANGLES
.X: ± 0.40 2°
.XX: ± 0.25
.XXX: ± 0.15

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

DO NOT SCALE DRAWING
INSULATOR: PBT, UL 94V-0 Rated, Black
CONTACT OR TERMINAL: Brass
SHIELD: Steel

MAX FLASH ALLOWED: .051
MAX GATE VESTIGE: .051
F:\DWG\EXISPROD\ASSEMBLY\10\sub

SHEET SCALE: 1:2

DESCRIPTION:
Vertical D-Sub Plug

DWG. NO.
DSM-VT-X-XX-P-X-XX-XX

BY: J. Riley 03/17/04 SHEET 1 OF 1



520 PARK EAST BLVD. NEW ALBANY, IN 47150
(812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085

CODE: 55322