


Insulator
Viewed from wiring side




7 pins x 0.7 mm

Keying


RED DOT



Dimensions
(mm)

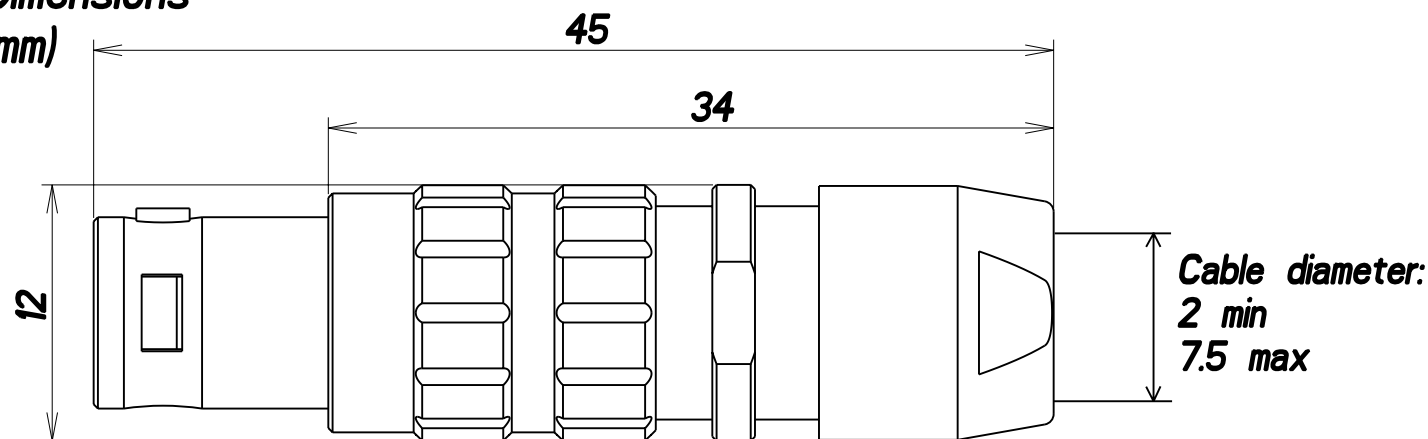

STRAIGHT PLUG size 1

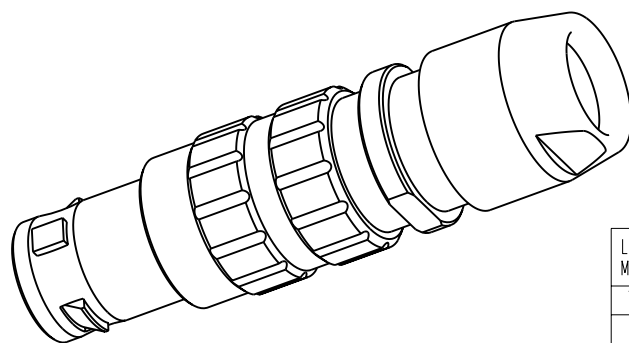

REV	ECN NUMBER	xxx mm-dd-yy	xxx mm-dd-yy
		BY DATE	CHKD DATE

REVISION

DRAWING TITLE

STRAIGHT PLUG SIZE 1

LINEAR MEASURE: mm [INCH]	
THIRD ANGLE PROJECTION	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
No. OF PLACES	INCH [mm]
ONE PLACE	±.1 [±3]
TWO PLACES	±0.02 [±.5]
THREE PLACES	±0.005 [±.13]
ANGLES ±1°	

CAT NO. JBX - FD - IG - 07 - MS - SDS - R						
DWG RELEASED TO CENTRAL FILE: 06/15/01			APPROVAL	DRAWN: CEJ	05/30/01	
CAGE NO: --		DON: 1643		SIZE: A	CHKD : DAF	05/30/01
 FCI INTERCONNECTIONS	SYMBOLS   INDICATE CLASSIFICATION PER SPECIFICATION D313			DSGN : DAF	05/30/01	
	THE SYMBOL  DENOTES INDICATORS FOR STATISTICAL PROCESS CONTROL REQUIREMENTS PER SPECIFICATION D735			MFG : EAP	05/30/01	
				QC : AGP	05/30/01	
			DRAWING SCALE: DRAWING SCALE			
			DRAWING NO.	REV		
			JBX-FD-IG-07-MS-SDS-R		0	
			1 OF 1			