



RoHS

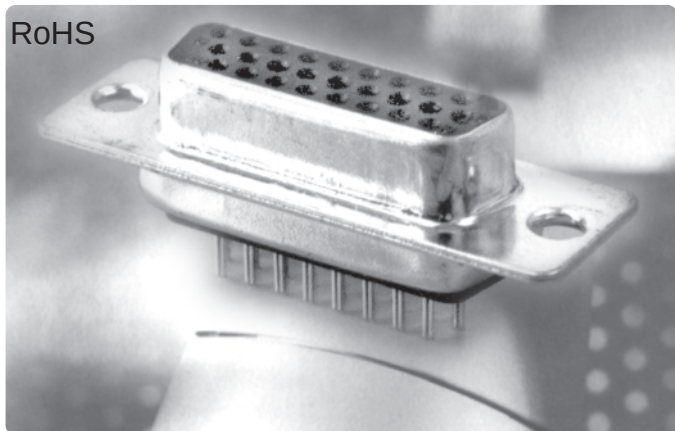

K86X Series High Density Vertical PCB Mount and Solder cup

Dimensions in mm [In]

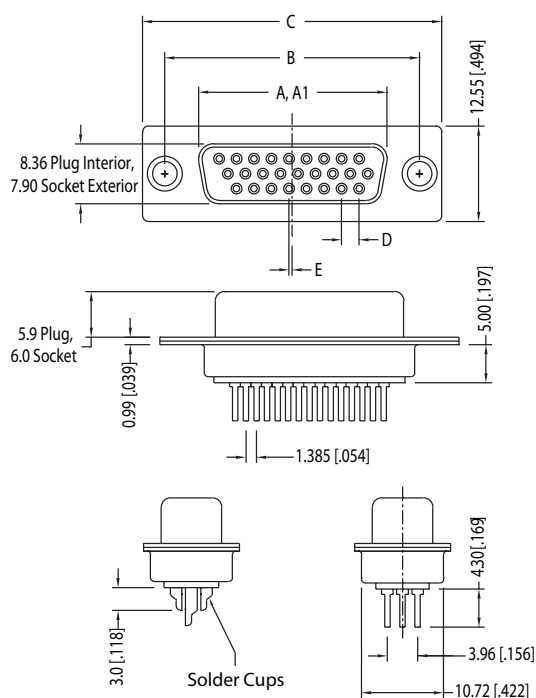

Number of Contacts (Shell Size)	Dimensions (Inch/mm)					
	A	A1	B	C	D	E
15 (E)	.643	.666	.984	1.213	.090	.010
	16.33	16.92	24.99	30.81	2.29	0.25
26 (A)	.971	.994	1.312	1.541	.090	.020
	24.66	25.25	33.32	39.14	2.29	0.51
44 (B)	1.511	1.534	1.852	2.088	.090	.020
	38.38	38.96	47.04	53.04	2.29	0.51
62 (C)	2.159	2.182	2.500	2.729	.094	.023
	54.84	55.42	63.50	69.32	2.41	0.58

A = Exterior of Female Shell (S) A1 = Interior of Male Shell (P)

D-SUBMINIATURE CONNECTORS

K86X Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder

Series	Shell Type	Contact Construction	Contact Option	Contact Type	Mounting Option	Plating Option
--------	------------	----------------------	----------------	--------------	-----------------	----------------

Series

K86X - D-Subminiature Vertical Connector

Contact Shell Size Option

E - 15 Contacts

A - 26 Contacts

B - 44 Contacts

C - 62 Contacts

Contact Construction

A - Precision Formed, Solder Cup (Not available with BR/J Option)

D - Precision Formed, Vertical pin (PCB Mount)

Contact Option

15, 26, 44, 62

Contact Type

P - Pin Contact (Plug)

S - Socket Contact (Receptacle)

Mounting Options

Blank - Without Riveted Option

BR - with (4-40) Tin Plated 6.00mm long Board Locks


BRJ - with (4-40) Tin Plated 6.00mm long Board Locks and (4-40) Hex Jack Screws

K - with (4-40) Bushings


KJ - with (4-40) Bushings and (4-40) Hex Jack Screws

R - with Round Riveted Jack Screws


-BR, Option



-K Option



-R Option



Plating Option

Blank - Gold Flash

30 - 30μ" Gold

15 - 15μ" Gold

Contact Kycon for High Temp and other Options