

Housings, Free Hanging or Panel Mount

Product Specification:

Centerline spacing—.165 [4.19]

Material:

Housing—Nylon, Natural Color-
Brick Red

Flammability Rating—UL94V-0

Related Product Data:

Performance Characteristics—
page 9068

Panel Cutout Recommendations—
page 9073

Contacts—page 9070

Keying Plug—page 9070

Strain Reliefs—page 9074

Commoning Bar—page 9074


Mating Headers—pages 9075 thru
9076

Technical Document: page 9068 and
9080


Product Specification

108-1022 (MR) Miniature Rectangular
Connectors

9, 12 and 15 Circuit, Matrix

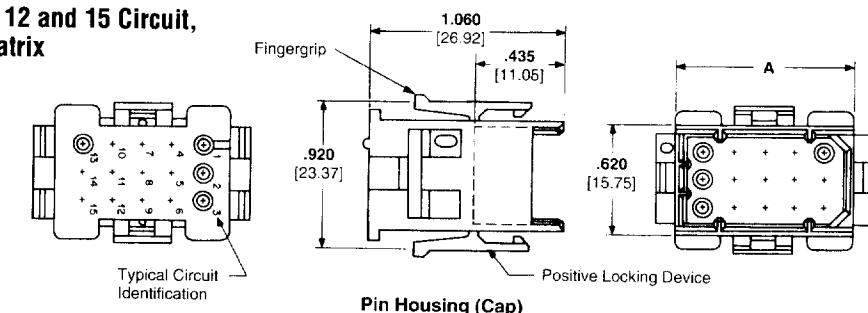


Pin Housing (Cap)

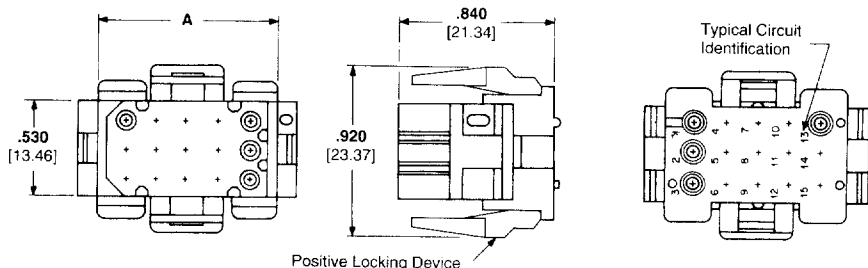


Socket Housing (Plug)

20 and 24 Circuit, Matrix

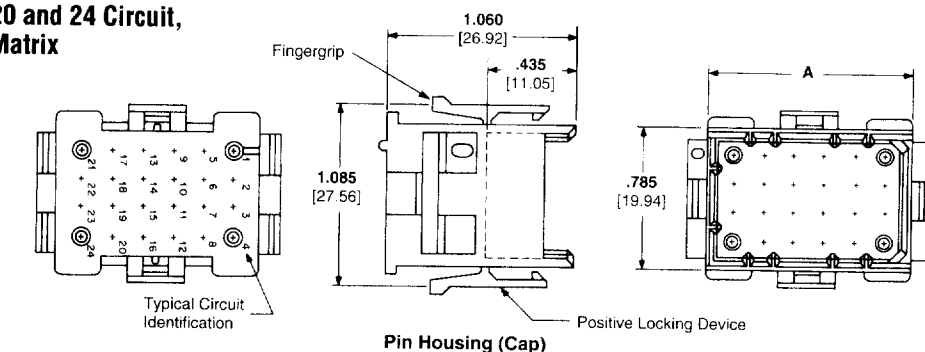

Pin Housing (Cap)

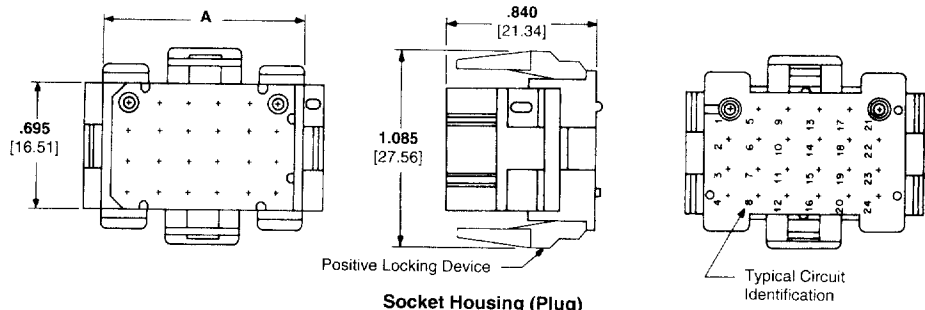

Socket Housing (Plug)

Number of Circuits	A Dim.	Part Numbers	
		Pin Housing (Cap)	Socket Housing (Plug)
9	.620 15.75	1-640511-0	1-640521-0
12	.785 19.94	1-640512-0	1-640522-0
15	.950 24.13	1-640513-0	1-640523-0
20	.950 24.13	1-640514-0	1-640524-0
24	1.115 28.32	1-640515-0	1-640525-0

For complete product information,
order Catalog 82181