


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
3/12/97	-	ISSUED		NT	MM
6/2/99	A	DEPTH OF THE BLIND HOLE .093 REF. WAS .098		NT	DG

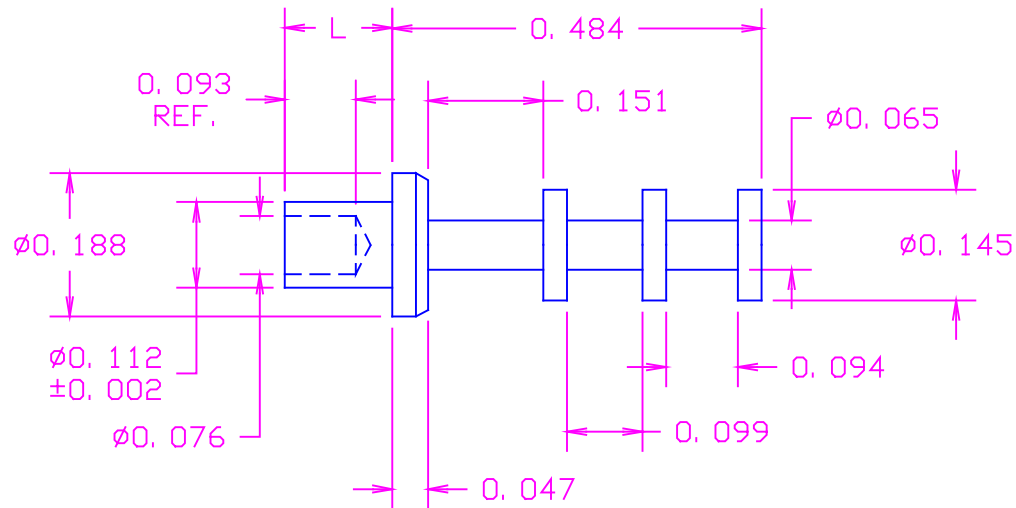


RECOMMENDED MOUNTING HOLE .116 DIA. (#32 DRILL)

MATERIAL: BRASS PER ASTM B16,
ALLOY C 36000, 1/2 HARD

FINISH: 01- .0003"MIN. SILVER PER QQ-S-365,
TYPE II, GRADE A WITH NON-CHROMATE
PRESERVATIVE
03- .000010"MIN. GOLD PER MIL-G-45204,
TYPE II, GRADE C, OVER .00010"MIN. NICKEL

PART NUMBER: L:
10-602-1-XX .078
10-602-2-XX .109
10-602-3-XX .141
10-602-4-XX .172
10-602-6-XX .234
10-602-8-XX .297

ACTUAL SIZE

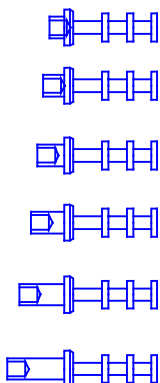

TOLERANCES (EXCEPT AS NOTED)	CONCORD ELECTRONICS CORPORATION			
DECIMAL ± .005	P/N		SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL ± 1/64	TITLE TERMINAL			
ANGULAR ± 5°	DATE 3-12-97	DRAWING NUMBER 10-602-X-XX PLATING		