
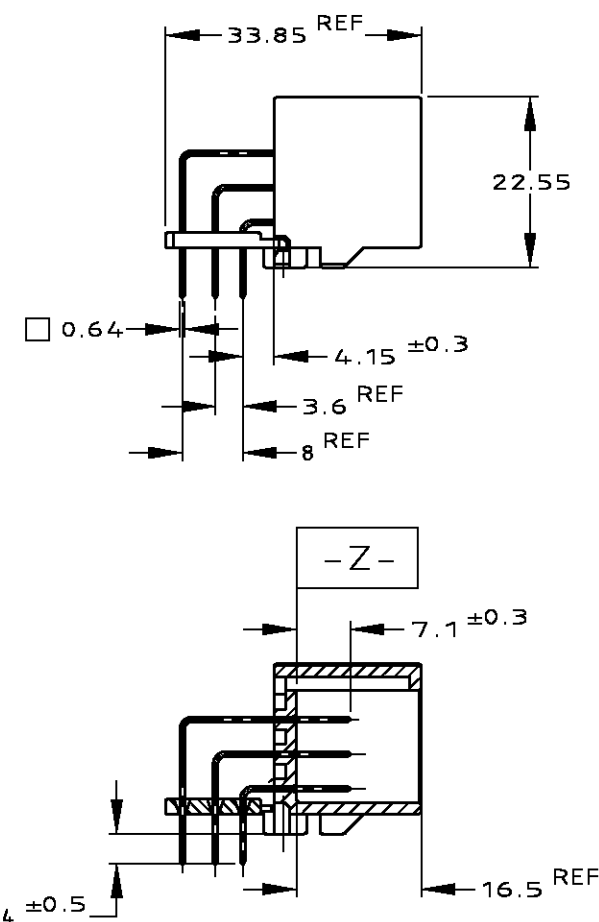
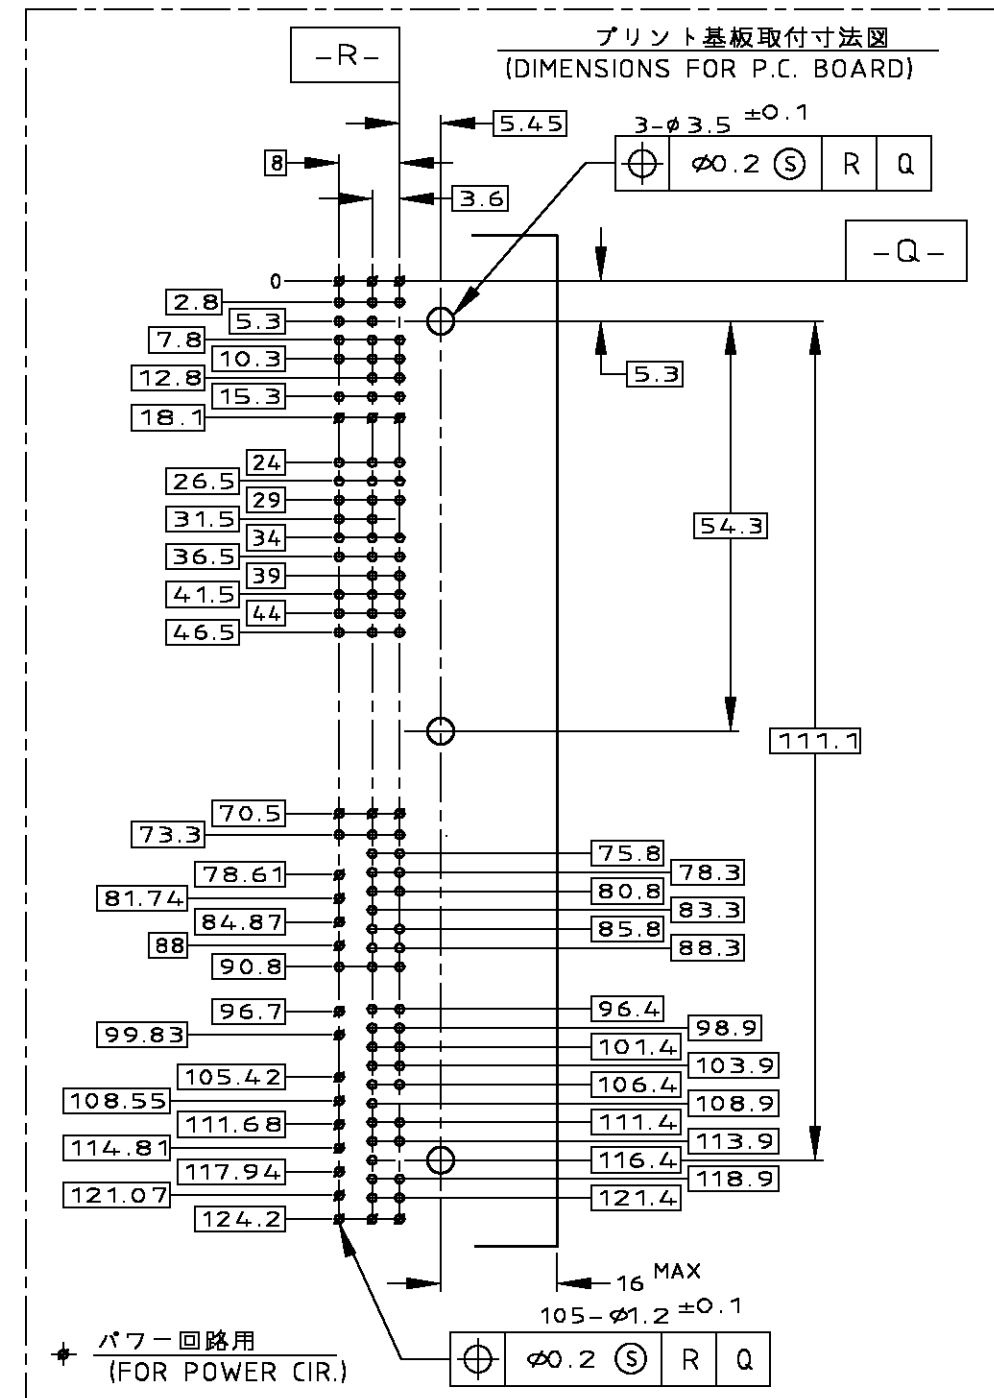
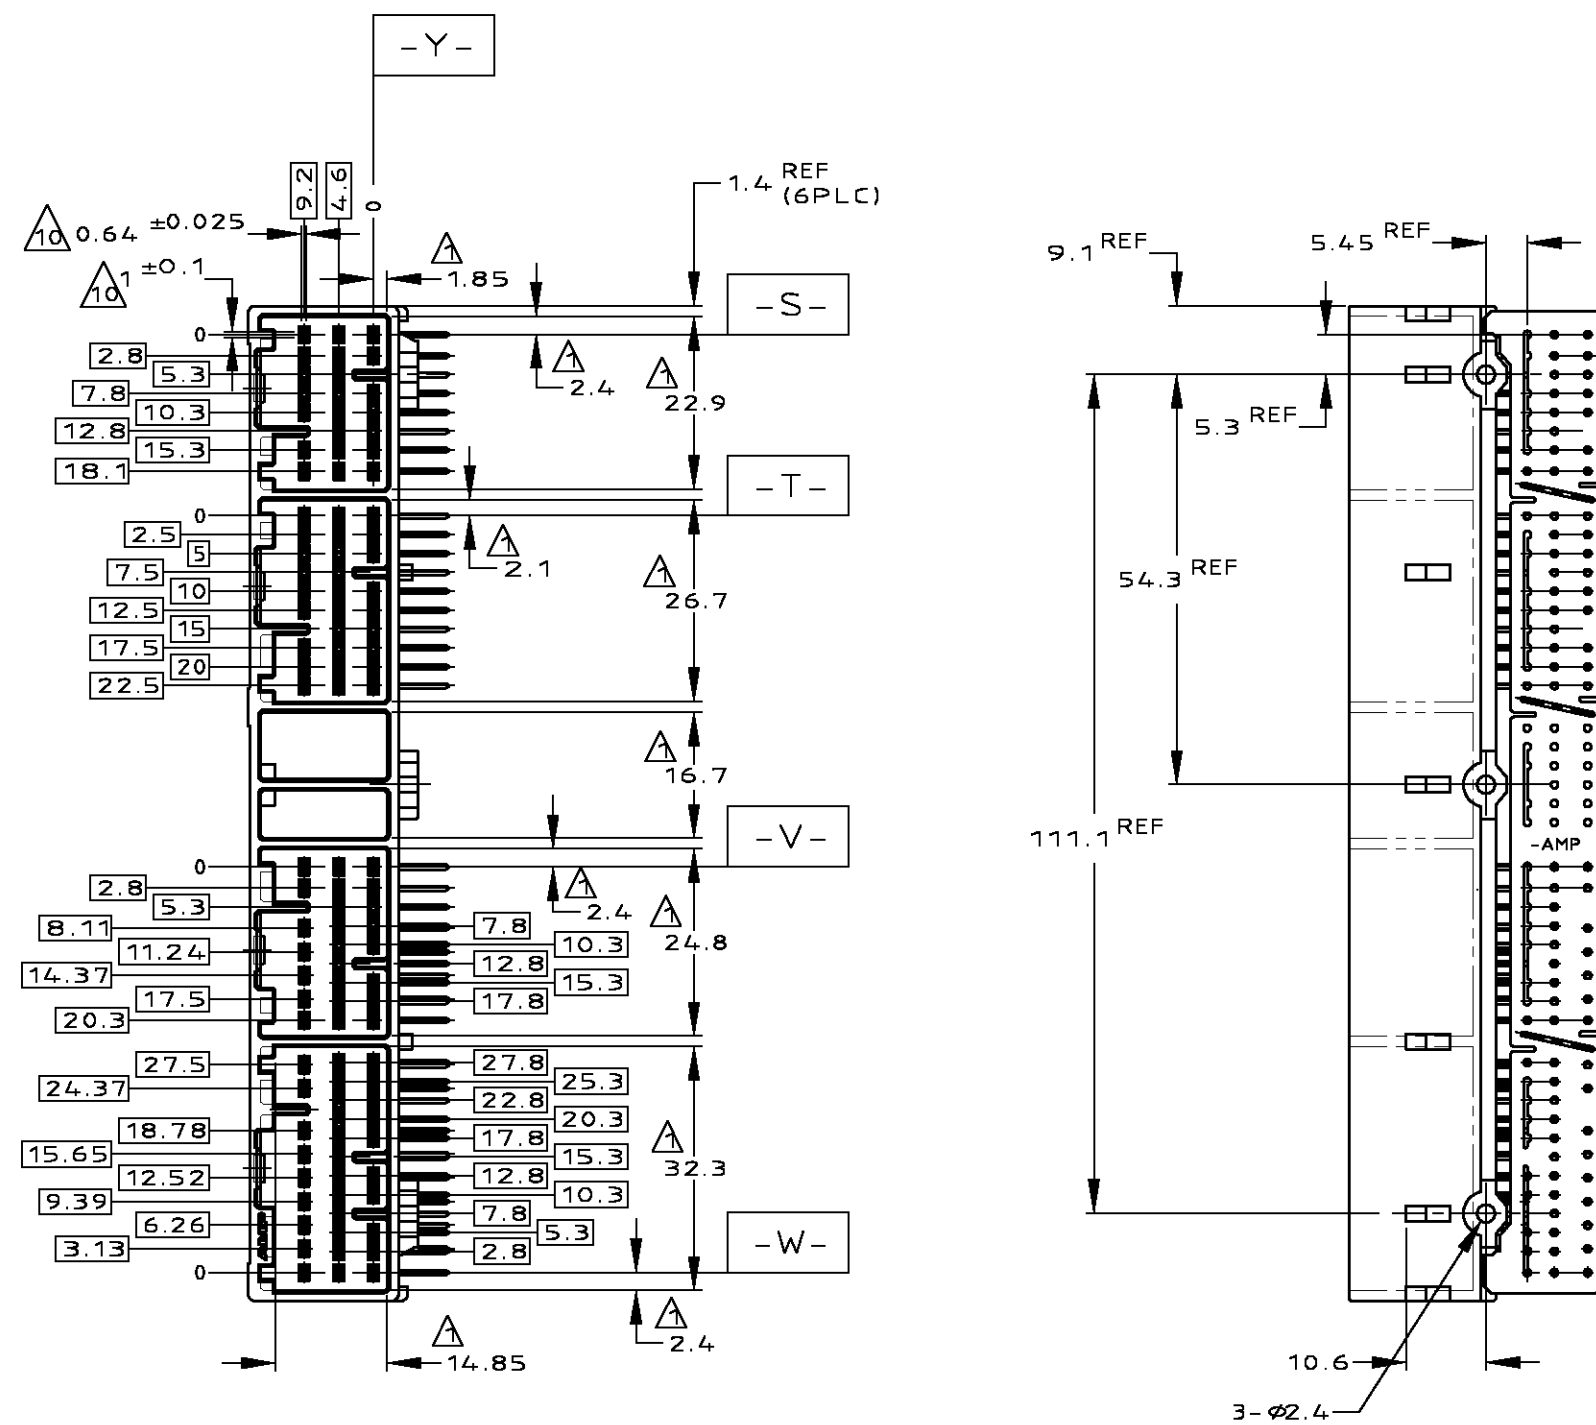





$$A - A$$

- | | |
|---|---|
| <p>① Z面より7.5mmの位置で測定</p> <p>② パワー回路(24極) ; FIG 1参照</p> <p>③ 回路番号 ; FIG 1参照</p> <p>4. 嵌合相手ハウジング型番
22P; 353028
24P; 353029
28P; 353030
31P; 353031</p> <p>5. 推奨取付ねじ ; JIS B1115, 1122タッピング
ねじ、なべ2種、呼び径3、長さ6以下</p> <p>6. ねじ締付トルク ; 0.392N・m MAX</p> <p>⑦ タイン・プレートの色は、自然色</p> <p>⑧ 外箱は段ボール箱仕様</p> <p>⑨ コンタクト仕上識別マーク ; 表参照</p> <p>⑩ 、ただし、
TOP OF POST
3次DTMについては、、、、</p> <p>⑪ 各々のブロック毎に適用する
製造DATE CODEが印字される可能性がある</p> | <p>① MEASURED AT THE SECTION 7.5mm FROM Z</p> <p>② POWER CIRCUITS (24) ; SEE FIG 1</p> <p>③ CIRCUIT NUMBERS ; SEE FIG 1</p> <p>4. PART NO OF PLUG HOUSINGS TO BE MATED
22P; 353028
24P; 353029
28P; 353030
31P; 353031</p> <p>5. RECOMMENDED SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW
OF 3DIA X 6LEN(MAX) (JIS B1115, B1122).</p> <p>6. FASTENING TORQUE FOR SCREW: 0.392 N・m MAX.</p> <p>⑦ TINE PLATE COLOR ; NATURAL</p> <p>⑧ OUTER PACKING; CARTON BOX</p> <p>⑨ MARKING FOR DISCERNMENT OF THE CONTACTS FINISH;
SEE TABLE</p> <p>⑩ 
TOP OF POST
TERTIARY DATUM;,,, OF EACH BLOCK</p> <p>⑪ TO BE POSSIBLE TO MARK MANUFACTURING DATE
CODE LOCATED APPROXIMATELY AS SHOWN.</p> |
|---|---|

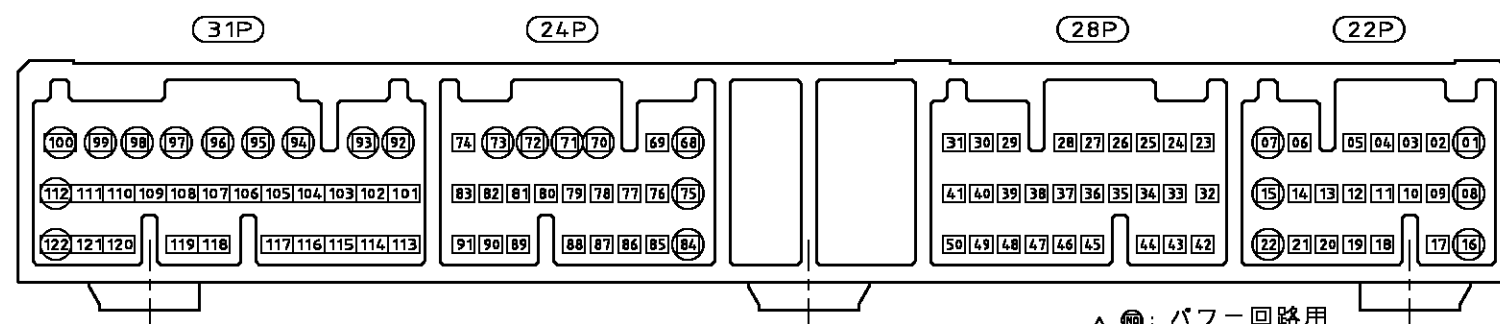

3 FIG 1 CIRCUIT NUMBERS

△^②; パワー回路用
(FOR POWER CIRCUIT)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N. YASUDA	25DEC00	Tyco Electronics K.K.	
		CHK N. SAI	25DEC00	Kawasaki, Japan	
DIMENSIONS: 单位: 耗 MM		APD N. SAI	25DEC00	NAME 名称 040 III HIGH DENSITY CONNECTOR 105P CAP HOUSING ASSY	
		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3 0 PLG ±0.3 1 PLG ± 2 PLG ± 3 PLG ± 4 PLG ± ANGLES ± 3°		PRODUCT SPEC 製品規格 108-5529	
MATERIAL 材料 PBT, BRASS		APPLICATION SPEC 取付適用規格 114-5217		SIZE A2	CAGE CODE 00779
FINISH 仕上 SEE TABLE		WEIGHT 38.5 g		DRAWING NO 番号 C-353016	RESTRICTED 〇
CUSTOMER DRAWING				SCALE 尺度 1:1	SHEET 1 of 2
				REV	K1

AMP 1470-19 REV 31MAR2000