


DIP IC SOCKETS - COMMERCIAL SOLDER TAB

703-33XX

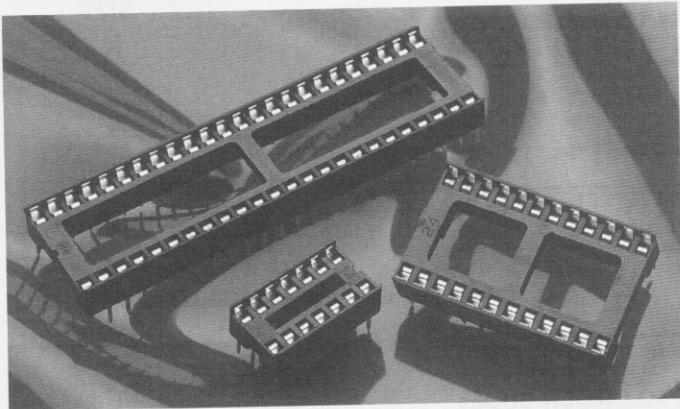

Features




- Commercial standard
- Glass re-inforced polyester molded body to UL 94 V-O
- Wide target contact area
- Ladder frame body construction
- Buttable end-to-end and side-to-side on .100" mounting grid

Benefits

- Low cost
- Flame retardancy
- For ease of insertion
- For improved airflow
- For high density boards

The CAMBION 33XX IC socket provides a quality dual leaf contact where cost is a prime consideration. The range is available in 6 through 48 positions in an open frame construction.

* (Contact factory for other pin-outs)

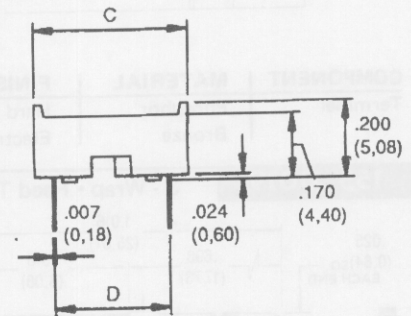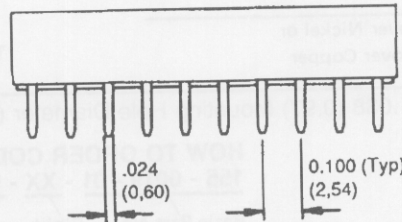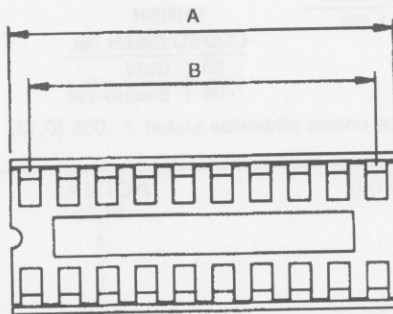

Contacts	Dimensions			
	A	B	C	D
06	.300 (7.62)	.200 (5.08)	.400 (10.16)	.300 (7.62)
08	.400 (10.16)	.300 (7.62)	.400 (10.16)	.300 (7.62)
14	.700 (17.78)	.600 (15.24)	.400 (10.16)	.300 (7.62)
16	.800 (20.32)	.700 (17.78)	.400 (10.16)	.300 (7.62)
18	.900 (22.86)	.800 (20.32)	.400 (10.16)	.300 (7.62)
20	1.00 (25.40)	.900 (22.86)	.400 (10.16)	.300 (7.62)
22	1.10 (27.94)	1.00 (25.40)	.400 (10.16)	.300 (7.62)
24	1.20 (30.48)	1.10 (27.94)	.400 (10.16)	.300 (7.62)
24	1.20 (30.48)	1.10 (27.94)	.700 (17.78)	.600 (15.24)
28	1.40 (35.48)	1.30 (33.02)	.400 (10.16)	.300 (7.62)
28	1.40 (35.48)	1.30 (33.02)	.700 (17.78)	.600 (15.24)
32	1.60 (40.64)	1.50 (38.10)	.700 (17.78)	.600 (15.24)
40	2.00 (50.80)	1.90 (48.26)	.400 (10.16)	.300 (7.62)
40	2.00 (50.80)	1.90 (48.26)	.700 (17.78)	.600 (15.24)
48	2.40 (60.96)	2.30 (58.42)	.700 (17.78)	.600 (15.24)

SPECIFICATION:

Body material; Black, glass filled polyester UL 94V-0
 Contact material; Phosphor bronze
 Contact finish; 100µ" tin plating (MIL-T-10727)
 Contact resistance; 16 m Ohms max at 1 Amp DC
 Insulation resistance; 10 G Ohms min
 Operating temperature; -55°C to + 105°C

HOW TO ORDER

703-33 XX-XX-04-10

Basic part _____
 No. of contacts _____
 row centres
 - 01 = .300"
 - 03 = .600"

Color (black)
 Plating (tin)