

# .050" (1,27mm) CABLE STRIPS FFSD SERIES





Mates with:  
FTS, FTSH

**Features:**

- Four-finger contacts optimize normal, insertion and withdrawal forces
- Low profile, only 5mm (.200") assembled height
- Mating terminal strip with keying shroud available (FTSH Series)
- Other sizes available.

**Specifications:**

**FFSD**  
 Insulator Material: Black Glass Filled Polyester  
 Contact: BeCu  
 Current Rating: 0.5A  
 Operating Temp Range: -40°C to +105°C  
 Plating: 10µ" (0,25µm) Au over 50µ" (1,27µm) Ni on contact area; 150µ" (3,81µm) Sn over 50µ" (1,27µm) Ni on balance  
 Lead Size Accepted: .018" (0,41mm) SQ  
 Contact Resistance: 10 mΩ maximum  
 Insertion Depth: .104" (2,64mm) to .125" (3,17mm)  
 Wire: 30 AWG

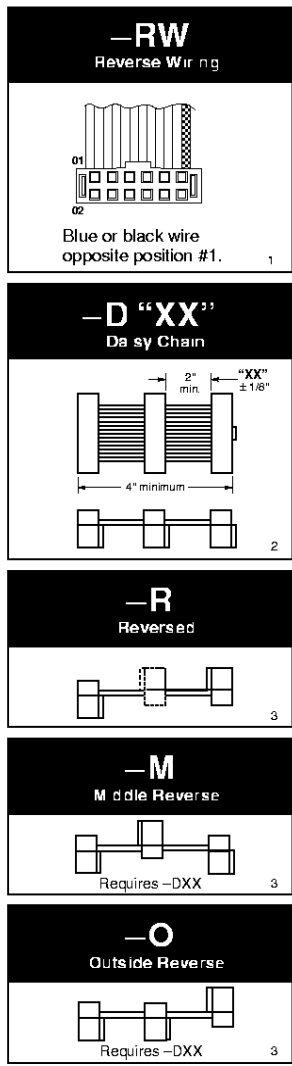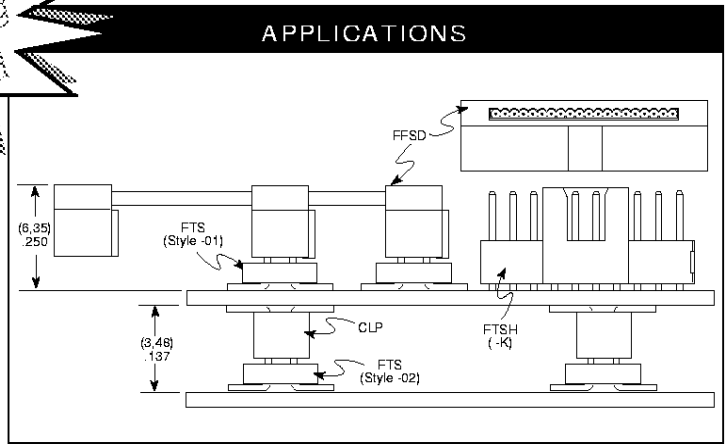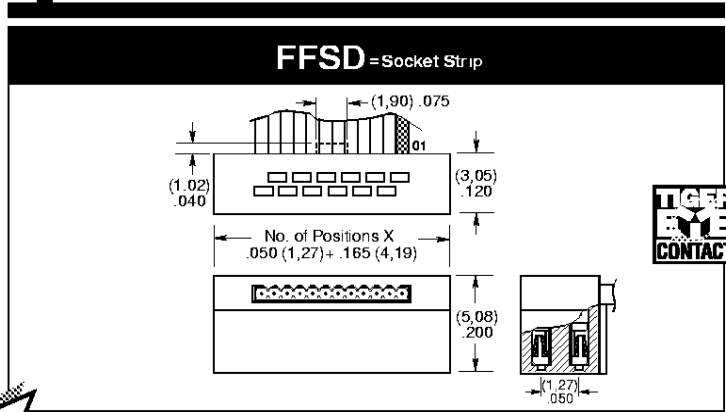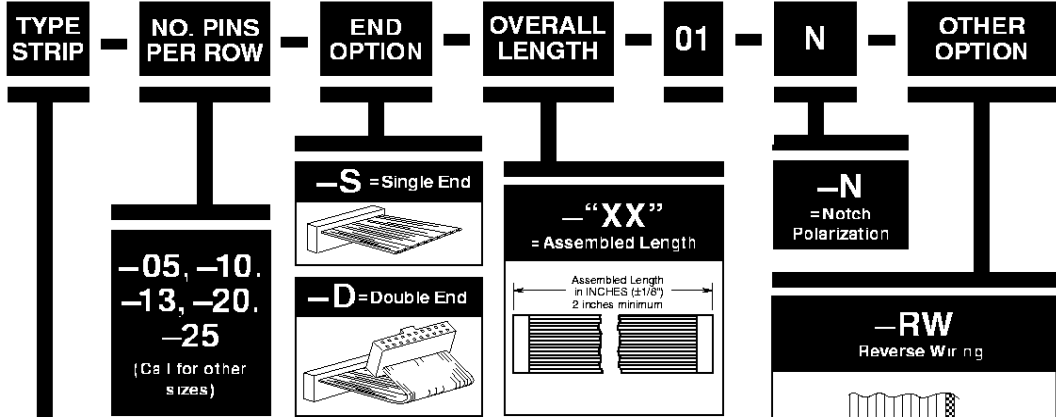

Note: This Series is non-standard, non-returnable.