

SPECIFICATIONS

Mechanical

Mating Force: 4Pounds max.
Unmating Force: 10Pounds max.
Durability: 1000 Cycles

Electrical


Current Rating: 0.5A max.
Dielectric Withstanding Voltage: 1500V

Physical


Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper Alloy
Shell: Copper Alloy
Operating Temperature: 0 to +70

Modular Jack

JFM Series
RJ45 1X1
R/A,T/U, T/H Type
1.27mm [.050"] Pitch
10/100 Base-T



DRAWING

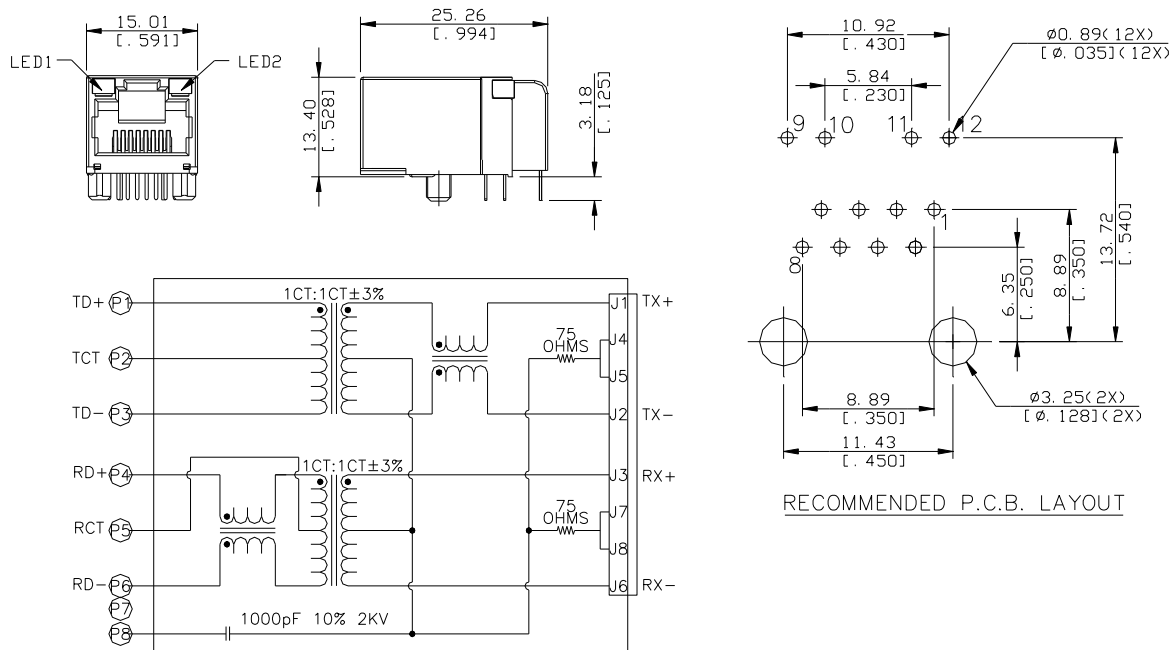

ORDERING INFORMATION

PRODUCT NO. : JFM 2 4 K 1 3 - L101 W

SERIES PREFIX:

JFM = RJ WITH MAGNETIC

PROTOCOL TYPE:

2 = 10/100 BASE T

CORE COUNT:

4 = 4-CORE

CONFIGURATION:

K = 1X1 T/U W/O SHIELD

PACKAGE TYPE

W=TRAY

EXTENSION CODE

LEDs:

3=LED CODE

PCB ATTACHMENT

METHOD:

1 = T/H

H	GREEN-YELLOW	GREEN
A	GREEN	GREEN-YELLOW
9	GREEN	RED
8	RED	GREEN
7	YELLOW	RED
6	RED	YELLOW
5	RED	RED
4	YELLOW	YELLOW
3	GREEN	YELLOW
2	GREEN	GREEN
1	YELLOW	GREEN
0	NONE	
	LED1	LED2