


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

KA-51-19

REVISIONS	
ISSUE	CHANGES
0	ER 6378 AME 09/09/68
1	CN 7564 C RWV 05/28/98
2	CN 12197 A JGL 04/30/73
3	CN 15773 A JHP 05/04/76
4	CN 25098 C GL 09/08/83

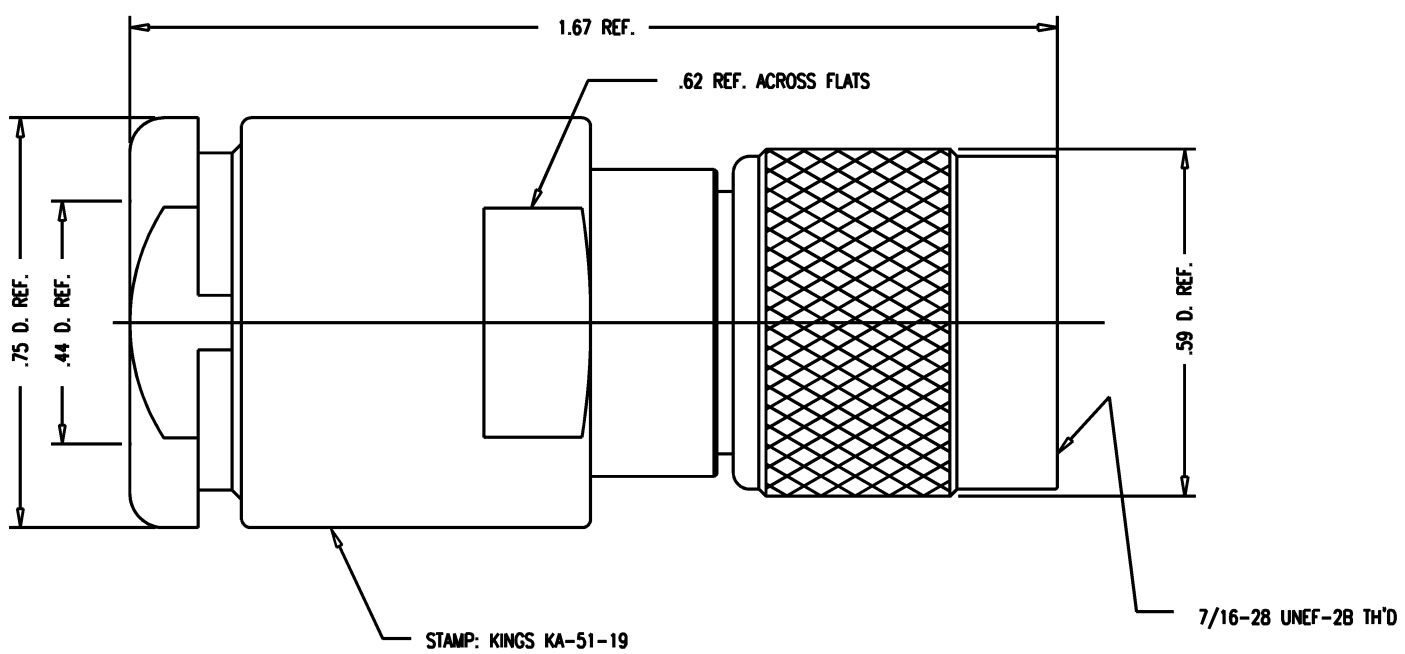

- NOTES:
- FOR USE WITH RG-8, 9, 213, 214 & 225/U CABLE GROUPS.
 - FOR CABLING INSTRUCTIONS SEE CP-1005.
 - MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKETS: SIL. RUB., ZZ-R-765
OUTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, QQ-B-626
 - FINISHES:
ALL METAL PARTS: SILVER PLT. PER QQ-S-365
 - ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz
 - INTERFACE PER MIL-STD-348, FIG. 313.1.

SCALE 4:1			
APPROX SURFACE AREA			
USED ON			
REF:			
TNC PLUG			
DRAWN	VLS	DATE	09/02/98
DESIGN	VLS	DATE	09/02/98
APPR.	VLS	DATE	09/02/98

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KA-51-19

SD