




MICRO SWITCH
 FREEPORT, ILLINOIS, U.S.A.
 A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
IISM3-T

DRAWING NUMBER **IISM3-T**
 PAGE 1 OF 1
 ISSUE **M**
 11
 REVISIONS
A C022077
 GCH 5 DEC 66
B C029449
 SRH 23 FEB 72
C CO-82803-B
 CSL 6 SEP 96
D CO-95172
 JJA 17 JUNE 99
 C095691
 GJW 3 DEC 99
 CHECK LSD 21 DEC 66
 CHECK 5 DEC 66
 FORMTEK
 DRAWN
 GCH 5 DEC 66
 REPLACES
 RELEASE NO.

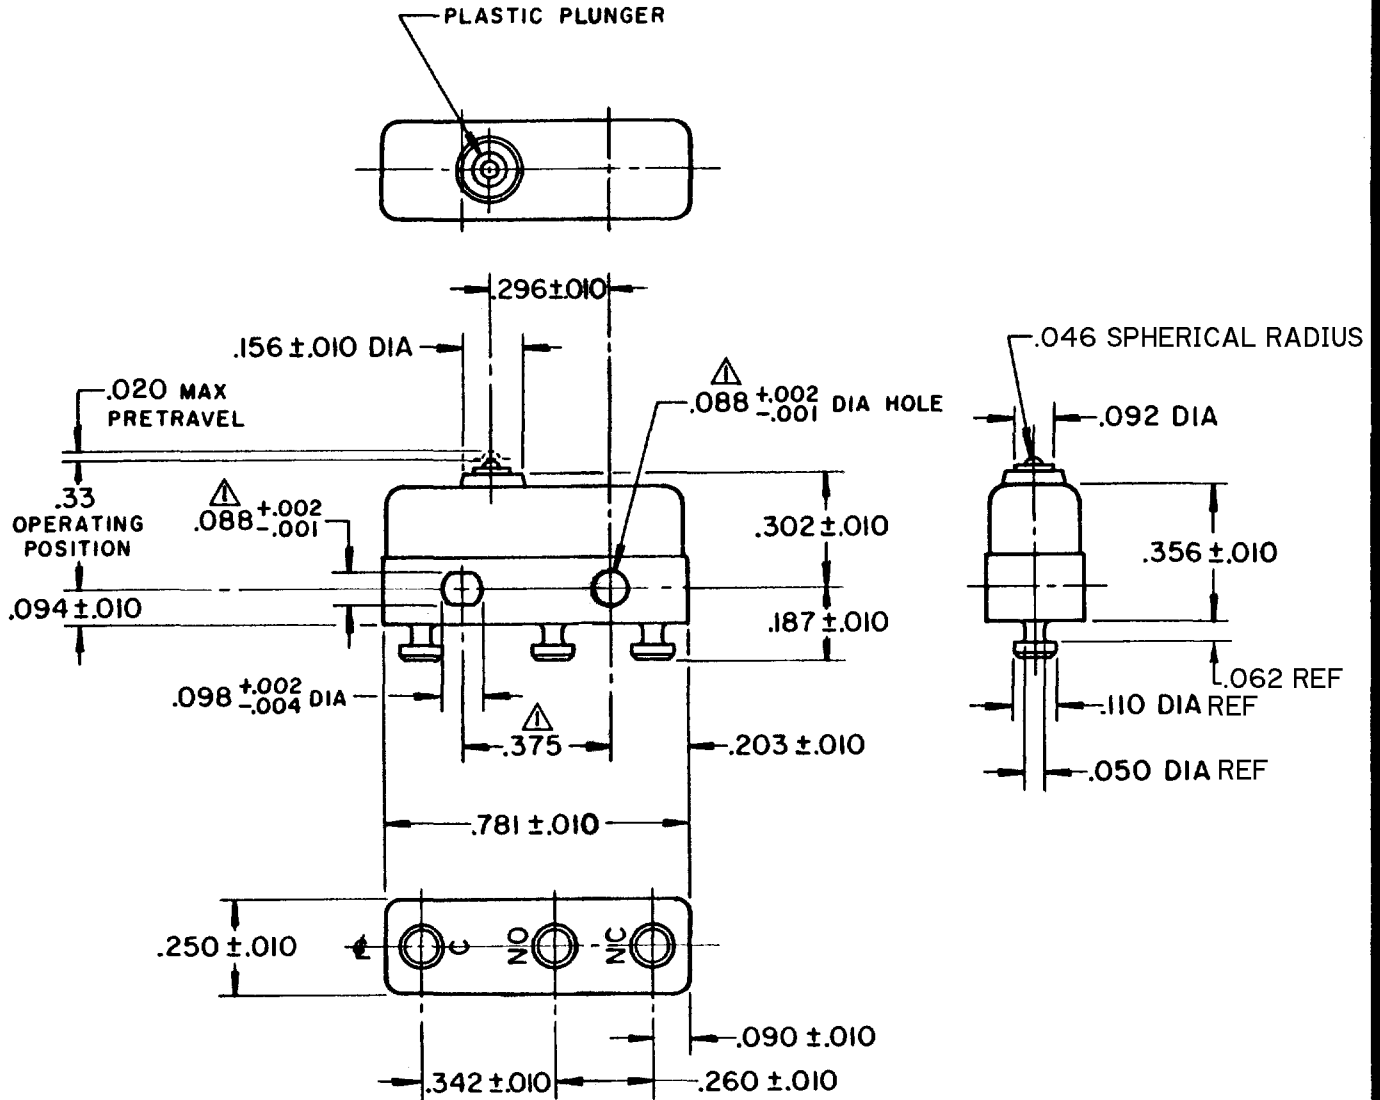

NOTE -
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 2 TO 1
OPERATING FORCE ----- 3-5 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 1 OZ MIN	30 VOLTS DC RATING	UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	DIMENSIONS ARE IN INCHES
OVERTRAVEL ----- .005 MIN	50,000 FT ----- 2.5 AMP	TOLERANCES ARE:
	RESISTIVE ----- SEA LEVEL ----- 5 AMP	ONE PLACE (.0) ±.030
	50,000 FT ----- 5 AMP	TWO PLACE (.00) ±.015
	MAXIMUM INRUSH ----- 24 AMP	THREE PLACE (.000) ±.005
	UNDERWRITERS' LAB. INC. LISTED RATING	ANGLES ±
	-L4- 5 A-250 VAC	WEIGHT .006 LB MAX